

Energy harvesting from the flow induced motion of flexible mangrove root-type models with different flexibilities

Amirkhosro Kazemi¹, Eduardo Castillo Charris², Daniel Gomez², Humberto Bocanegra Evans³, Oscar Curet⁴, and Luciano Castillo¹

¹Purdue University

²University of Turabo

³Texas Tech University

⁴Florida Atlantic University

November 23, 2022

Abstract

Red mangroves, *Rhizophora mangle*, in coastal areas have proven to be resilient for many decades. Mangroves accumulate mud, peat and plant matter through aerial roots (Pneumatophores) consist of rigid and flexible roots oscillating in the water. The oscillation of the flexible root not only decreases erosion but also provide a source of renewable energy. These oscillations can essentially be harvested as electrical power from tidal currents of the shallow coastal water in the form of pollution free energy by converting the kinetic energy of the moving fluid into voltage. We present an elastically mounted rigid patch of circular cylinders as simplified flexible mangrove roots to understand the role of flexibility on the vortex-induced vibration phenomena for energy harvesting. We performed kinematics and PIV measurements inside a water channel for the cylinders limited to a transverse oscillation inside a water tunnel at constant velocities. We investigate the effect of Reynolds number, mass ratio, damping ratio, and natural frequency of the system on the range of the achievable voltage. Higher flexibility resulted in increasing the frequency of oscillations with a reduction in the reduced velocity. This bio-inspired design has potentials for future electricity generations, as tidal currents are more predictable than wind energy and solar power as well as environmentally friendly due to minimal alterations to ecosystems and marine life.

Energy harvesting from the flow induced motion of flexible mangrove root-type models with different flexibilities.

Amirkhosro Kazemi (Purdue), Eduardo E Castillo Charris (Turabo), Daniel Gomez (Turabo), Humberto Bocanegra Evans (Texas Tech), Oscar M Curet (FAU), Luciano Castillo (Purdue)



Abstract

- Red mangroves, *Rhizophora mangle*, in coastal areas comprised of rigid and flexible roots (*Pneumatophores*) oscillating in the water. The oscillations of the flexible root provide a new source of renewable energy. These oscillations can essentially be harvested as electrical power from tidal currents of the shallow coastal water in the form of pollution-free energy by converting the kinetic energy of the moving fluid into voltage. Understanding and quantifying an optimal regime in vortex induced vibrations (VIV) and energy harvesting is a major challenge and objective of this research. We present an elastically mounted rigid circular cylinder as simplified flexible mangrove roots attached to a coil and magnet to understand the role of flexibility on the vortex-induced vibration phenomena for energy harvesting. In a series of experiments, we performed kinematics measurements inside a water channel for the cylinders limited to a transverse oscillation (one degree of freedom) at constant velocities ($200 \leq Re_d \leq 1400$). We tested three different flexibilities, and found that the optimal range for the middle flexibilities is $4 < U_r < 6$.

Introduction

- Mangroves are salt-tolerant species of trees that can live along the intertidal coastal zones in tropical and sub-tropical regions [1,2].
- Some unique flexible mangrove roots and branches can oscillate in the water. The oscillations provide great opportunity to harvest energy from the flow in riverine currents.
- We designed a energy harvesting device including a magnet and a coil attached to a rigid circular cylinder which was elastically mounted to a flexible steel plate.
- Questions:**
 - How do the root flexibilities and water flow velocity affect the energy harvesting from the oscillations?
 - How does the wake respond to a motion of the root that causes the wake?
 - What is the optimum range of efficiency and amplitude for this oscillation?

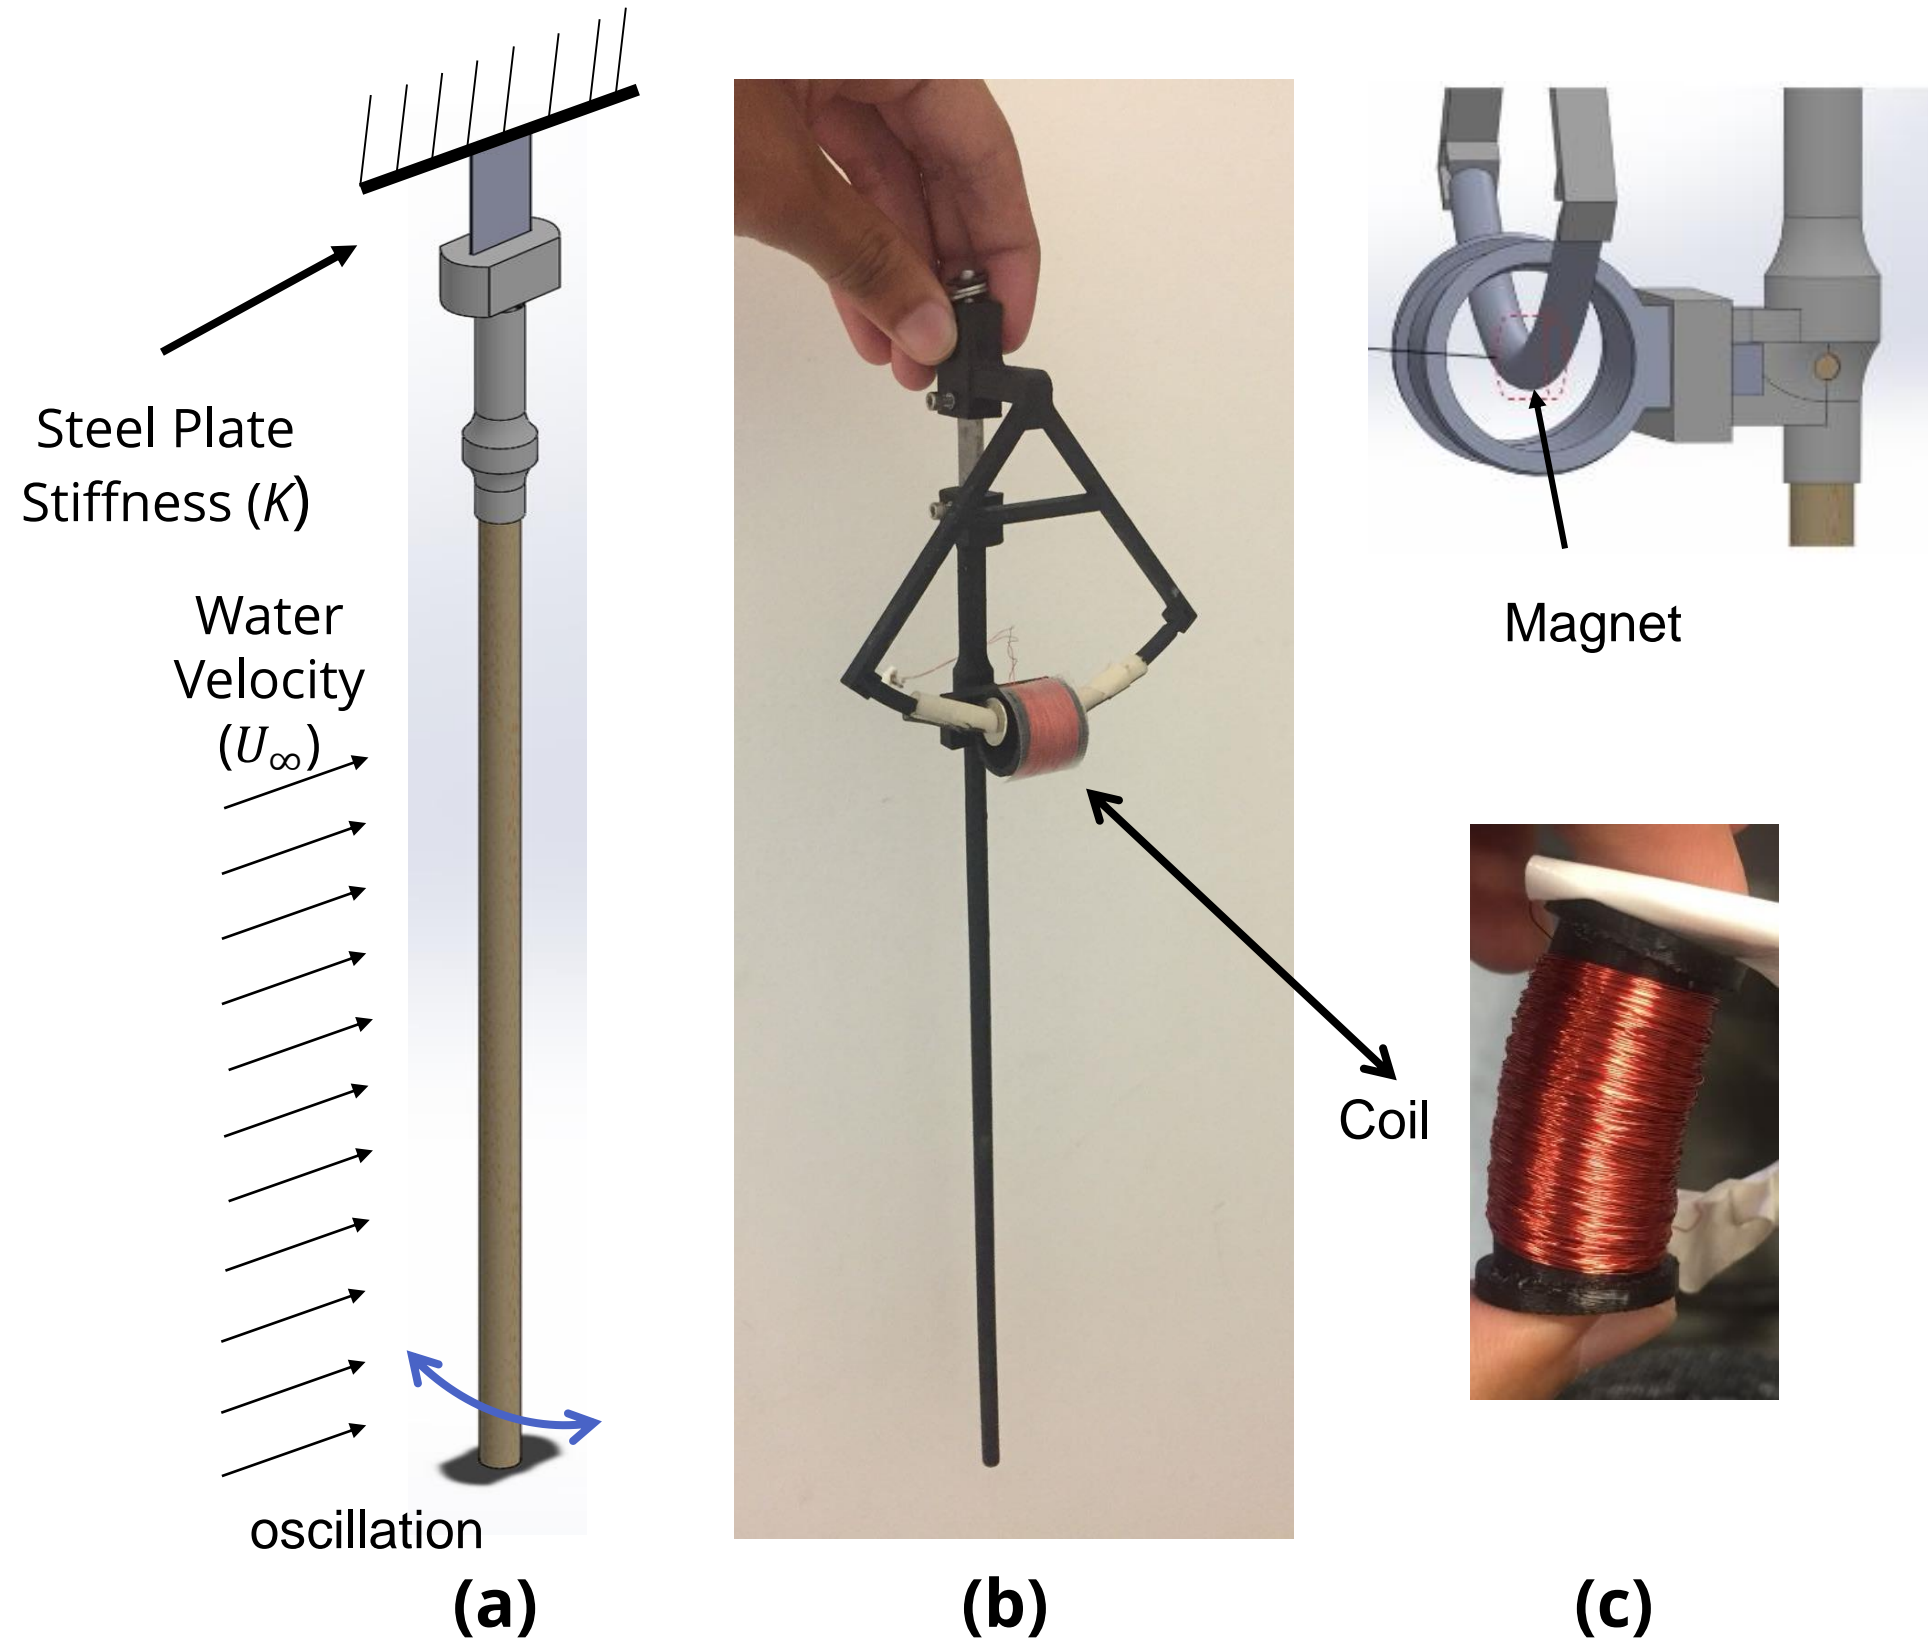


Fig 1. Simplified mangrove root model ($d=6.35$ mm) oscillating in the water current with single cylinder attached to a flexible steel plate (b) Energy harvesting device assembly that was tested with three different flexibilities (c) coil and magnet used to convert kinetic energy into electrical power from the VIV of the cylinder.

Methodology

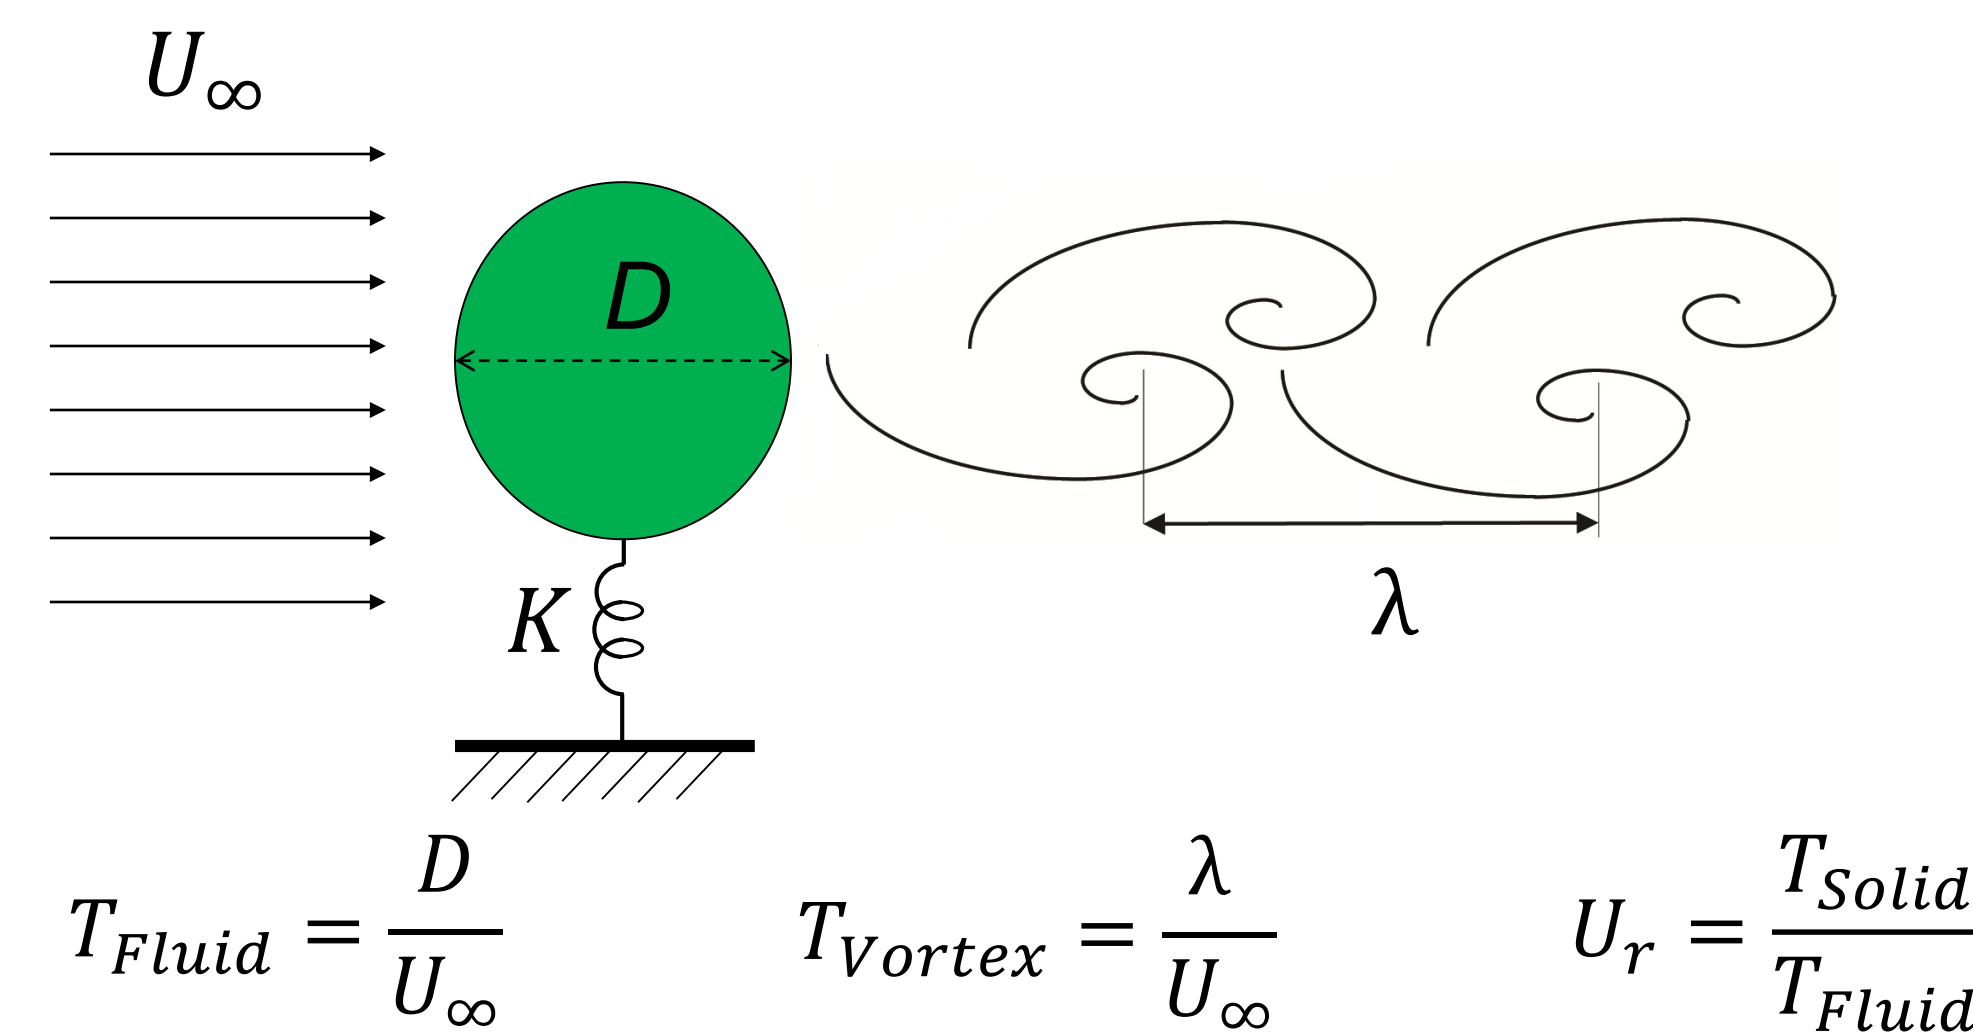


Fig 2. Time-scales for VIV; T_{Fluid} corresponds to the time for convection of a particle across the length D , T_{Vortex} is period of vortex shedding, T_{Solid} is the period of cylinder oscillations and U_r (reduced velocity) is used to compare the dynamics of fluid and of the solid.

$$\text{Strouhal law: } T_{Vortex} = \frac{T_{Fluid}}{St} \Rightarrow \frac{T_{Solid}}{T_{Vortex}} = St \times U_r$$

- When $St \times U_r = 1$, shedding of the vortices and motion of the solid happen at the same time-scale and resonance (locked-in) occurs.
- In the locked-in region the mass-spring system doesn't follow the Strouhal law and the oscillation frequency is fixed with vortex shedding frequency.

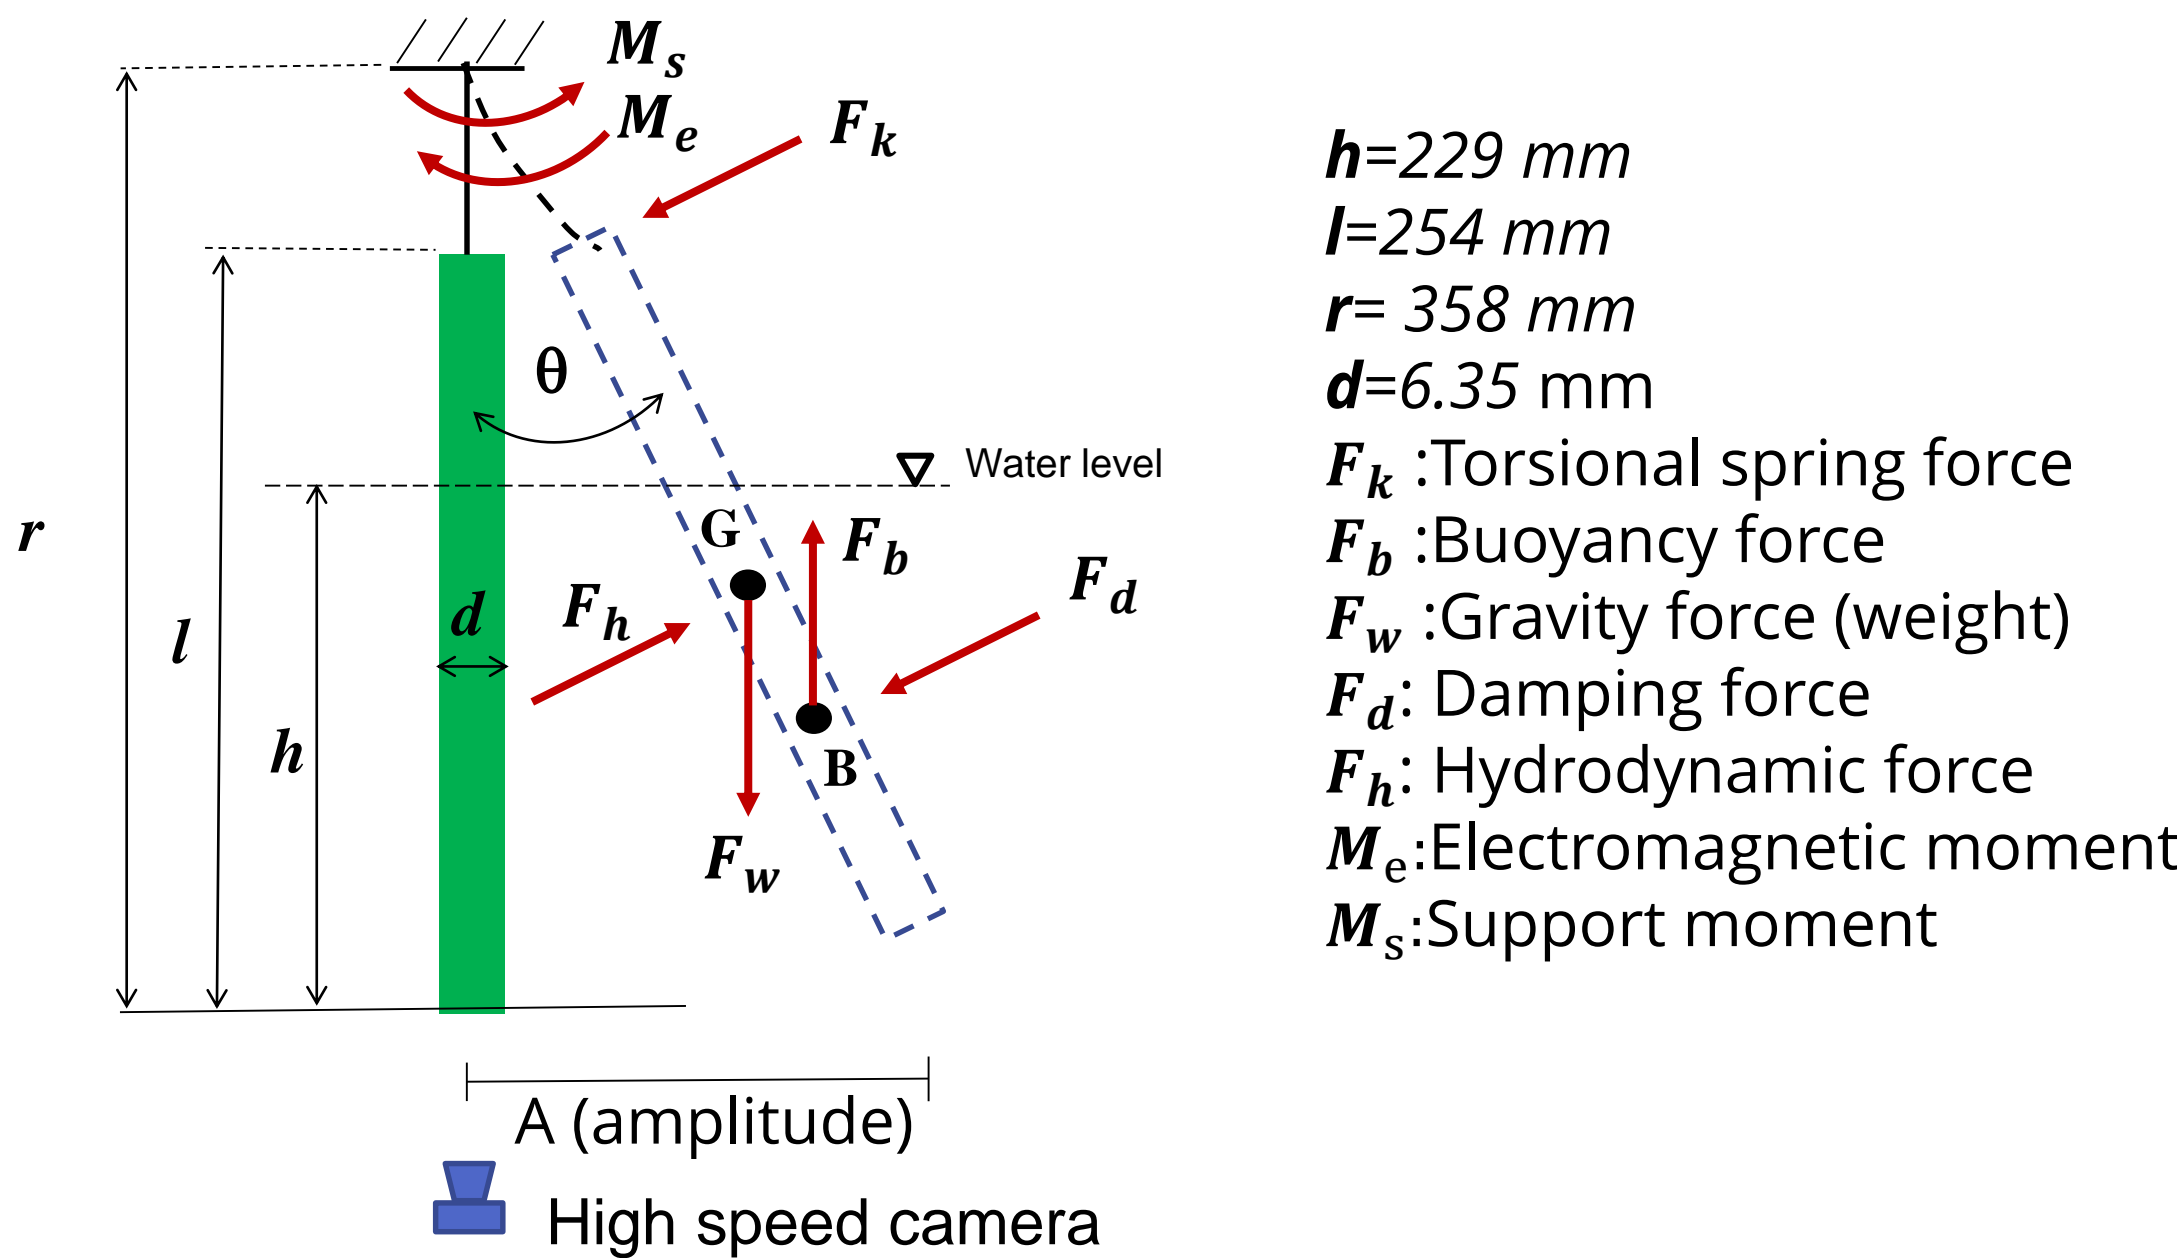


Fig 3. Schematic of free-body diagram of a single root model in VIV in a half cycle oscillation. The oscillation motions were captured with a high speed camera at 256 frame per second at different flow speed from $0.02 \frac{m}{s}$ to $0.18 \frac{m}{s}$. We performed image processing to analyze the kinematics of oscillations.

- Static equilibrium of the system

$$M_s - M_k - M_e + F_b \sin \theta r_B - F_w \sin \theta r_G - k\theta - l\ddot{\theta} = 0$$

$$\omega = 2\pi f_n = \sqrt{\frac{K}{I}} \quad I = I_a + I_b \quad K = K_{flexible \text{ plate}}$$

I_a : Added inertia due to cylinder oscillations in water
 I_b : Inertia of a hanging root

- Dynamic response of the system

$$I\ddot{\theta} + k\theta = \frac{1}{2} \rho U_r^2 l C_L \sin\left(\frac{2\pi t}{T_{vortex}}\right)$$

$\theta(t)$: Dynamics of the cylinder $F(t)$: Forcing by the wake

Results

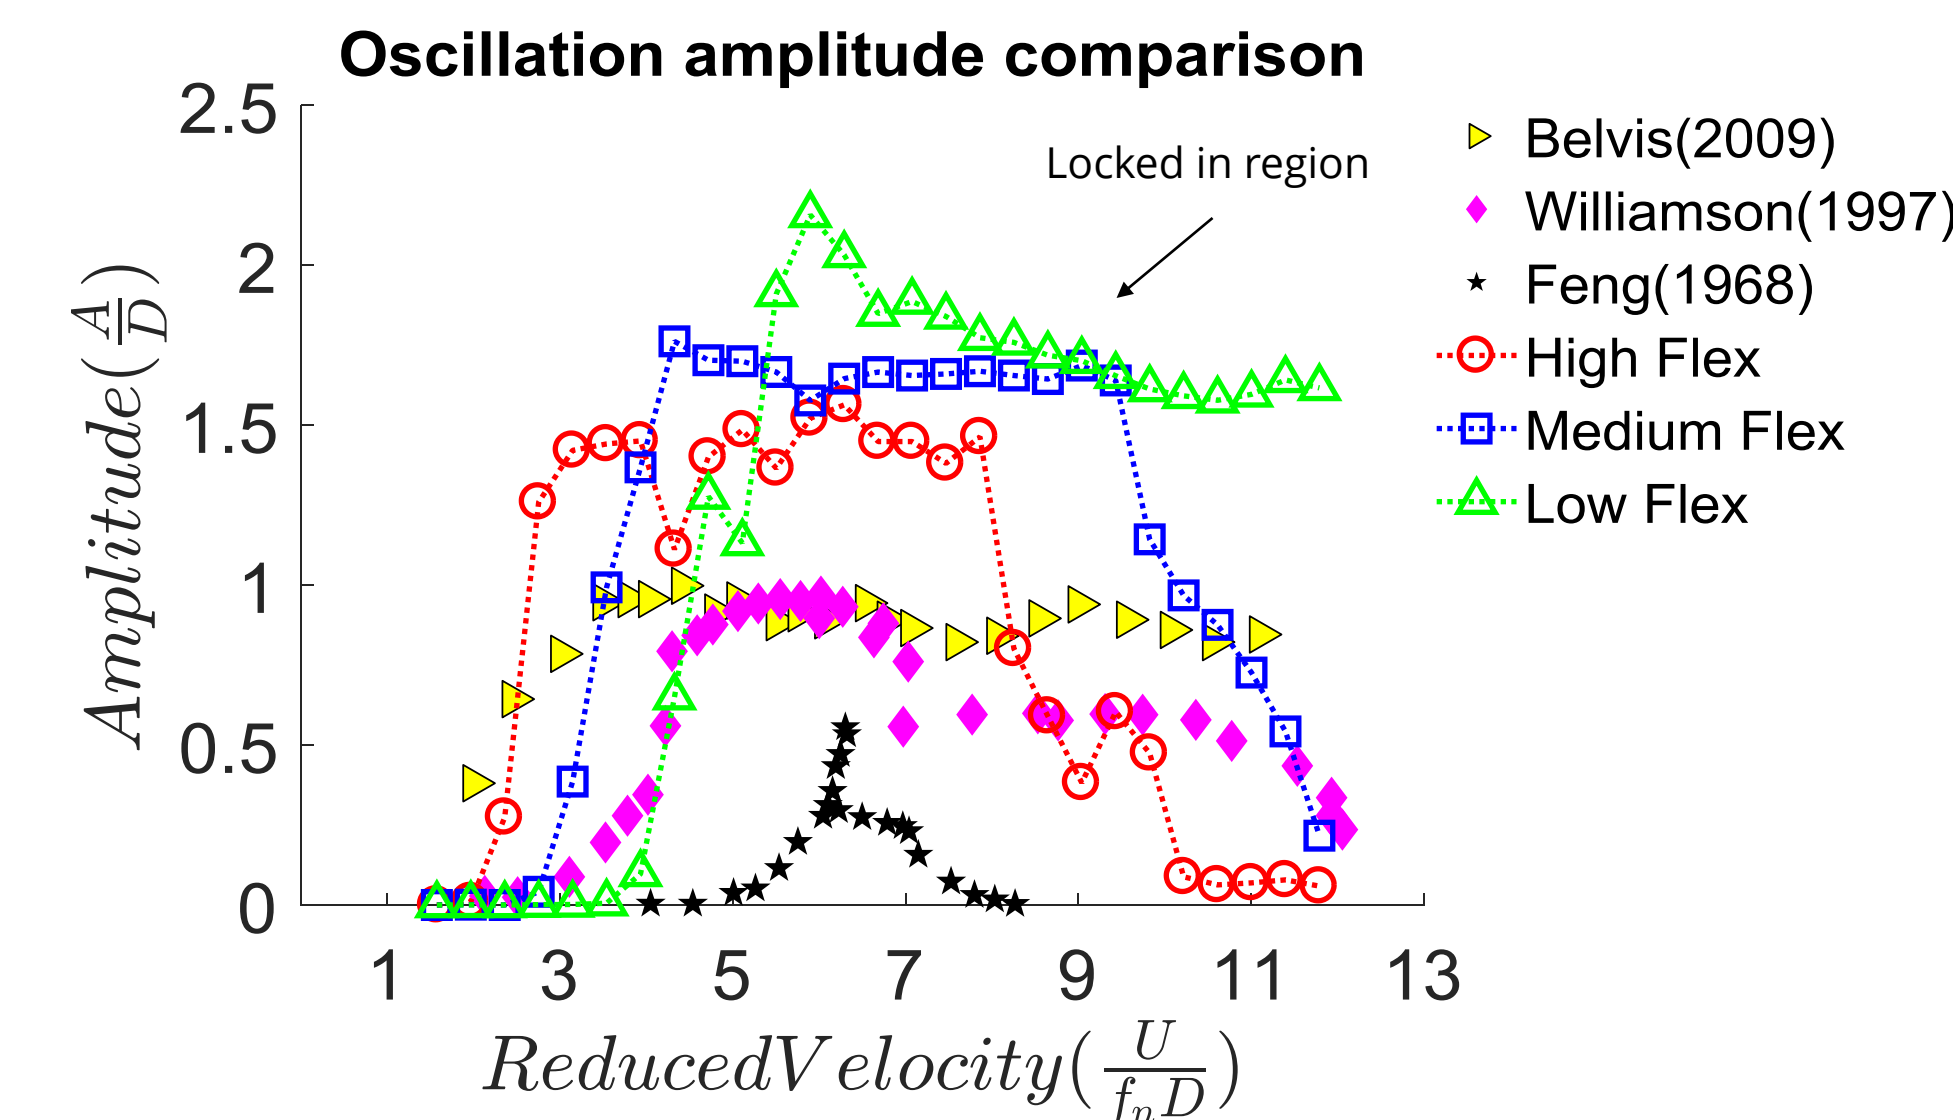


Fig 4. Comparison of normalize amplitude of oscillations versus reduced velocity with different flexibility. It is observed that lower flexibility has the largest region of locked-in (Synchronization).

- For the low flex, oscillations start at higher kinetic energy of the flow (higher velocities), however, the oscillation amplitude reaches greater values compare to the high flex.
- It is observed that for higher flexibilities, the oscillation decays with increasing reduced velocity (Reynolds number), however, for the low flex, the region of synchronization increases and remains almost plateaued.
- The oscillation amplitudes for the present study is considerably higher than the canonical case of cylinder oscillation in previous works, indicating a higher possibility of harvesting energy from the flow.

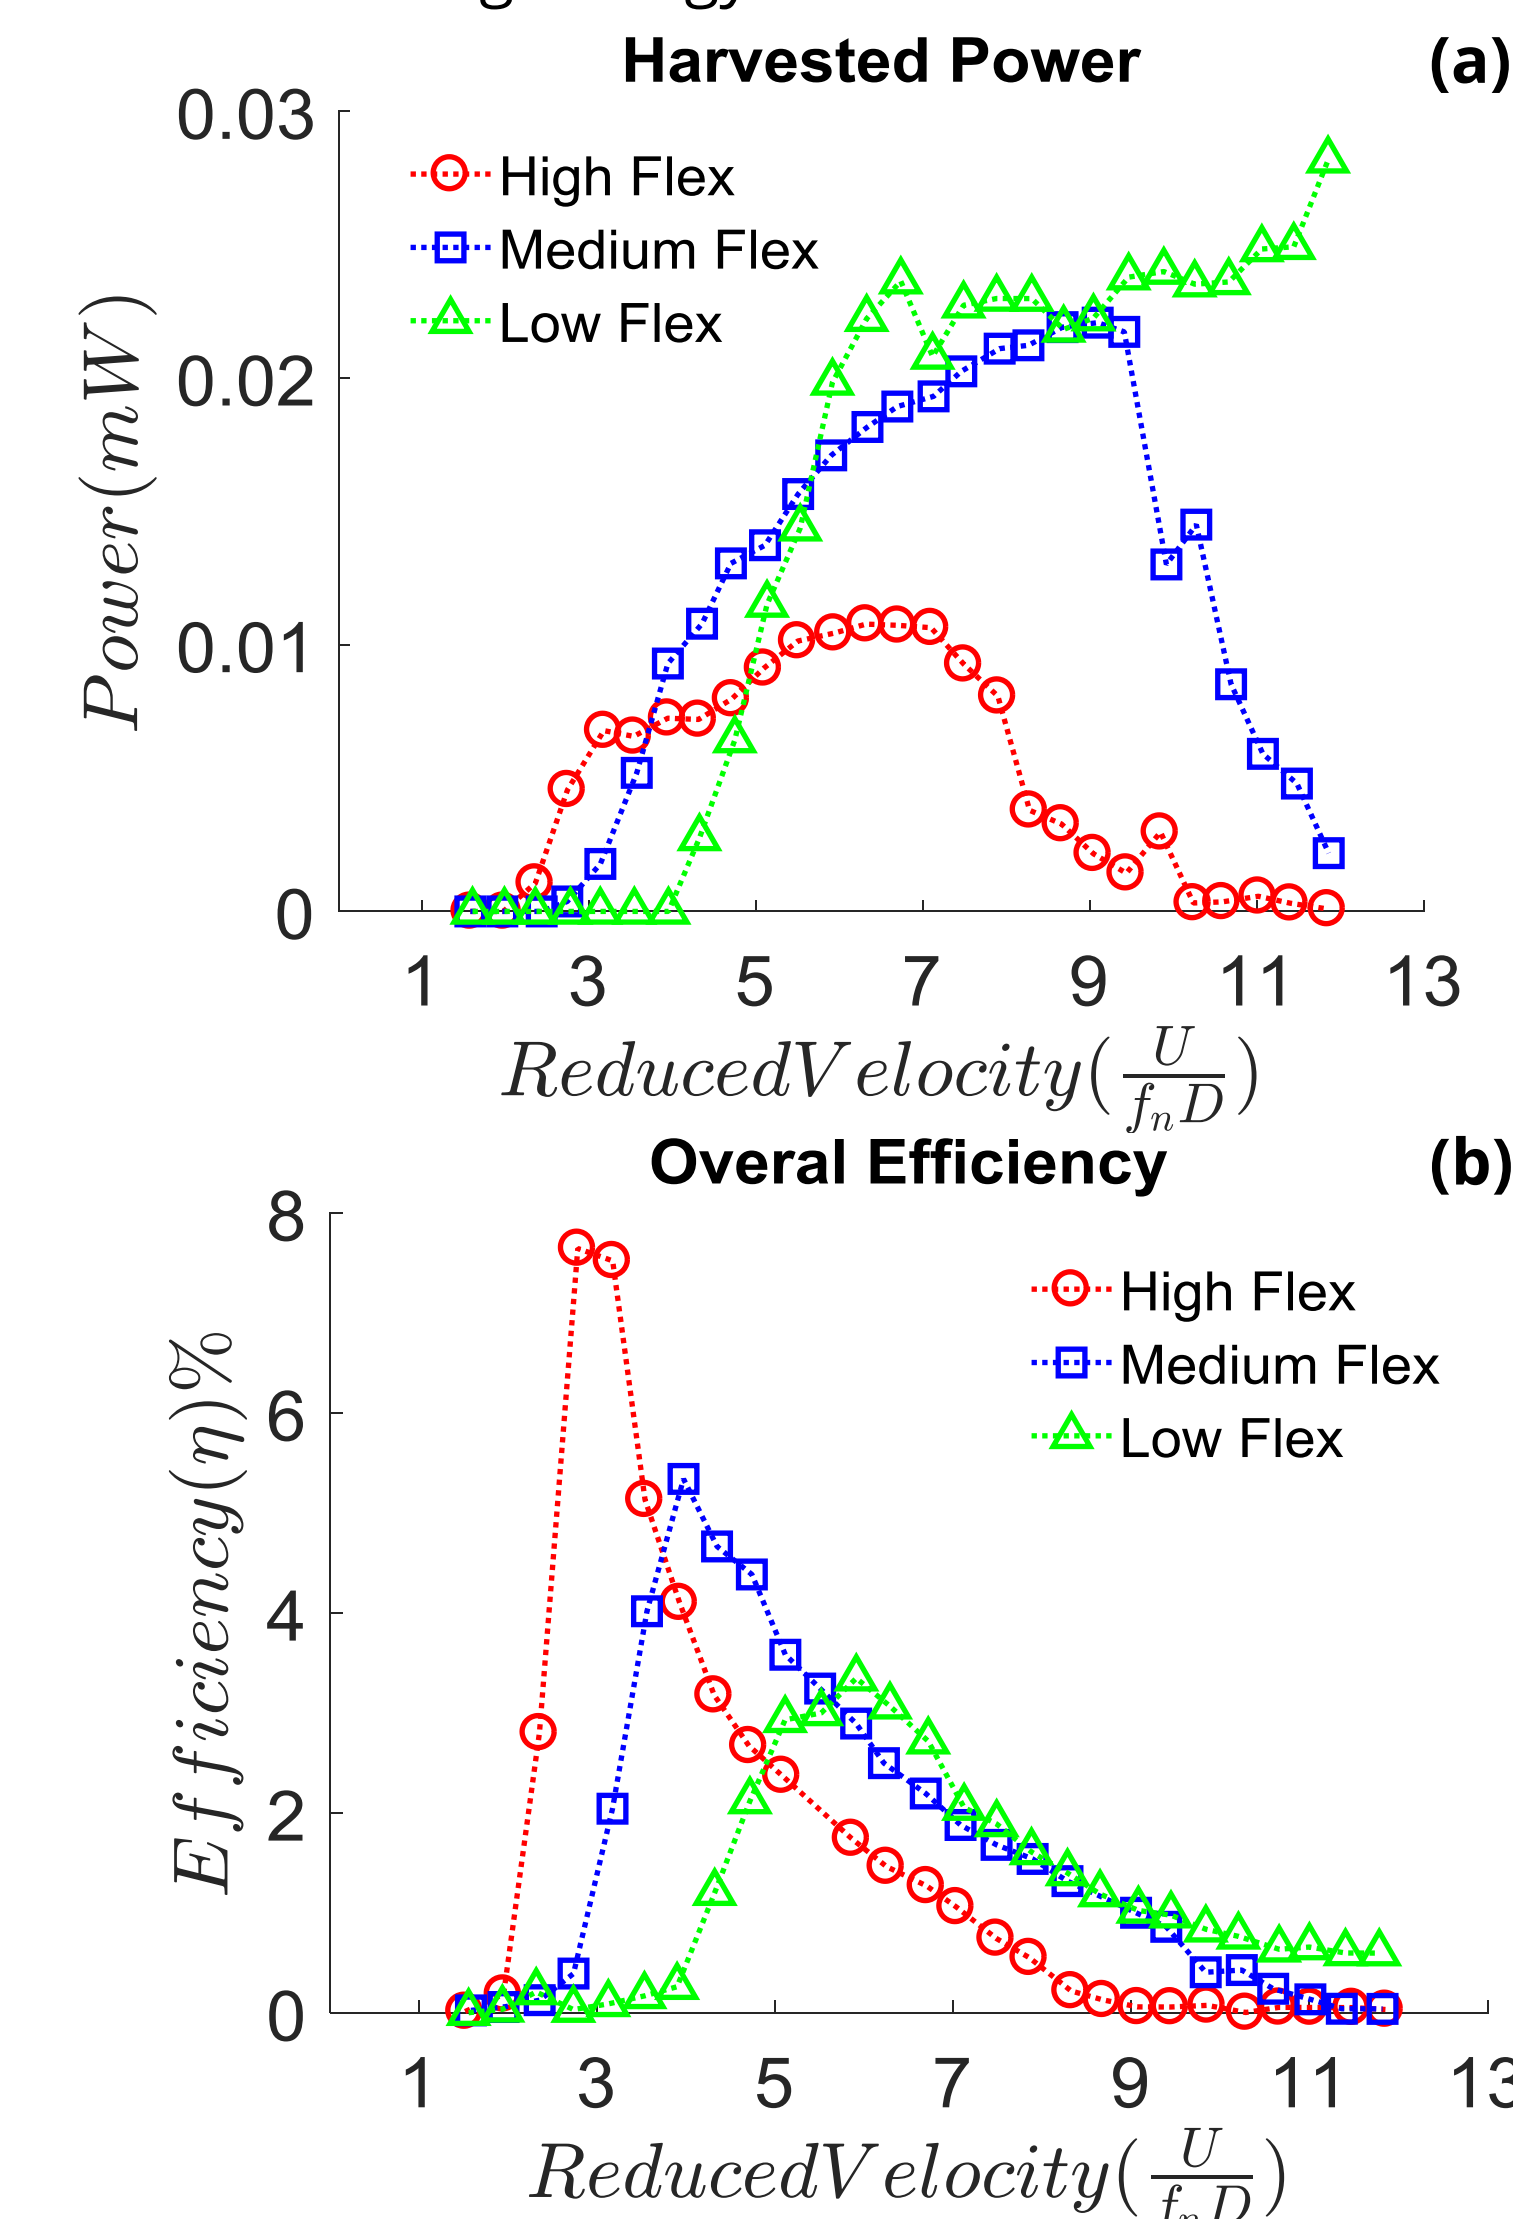


Fig 5. (a) Electric power increases with reducing the flexibilities. (b) overall efficiency ($\eta = \frac{\text{electrical power}}{\text{fluid power}}$), where fluid power $= \frac{1}{2} \rho U^3 (dh)$.

- It is observed that for the low flex, the electrical power is considerably high at $U_r = 9$, even though the efficiency is quite low.

Optimal Regim for Mid Flex

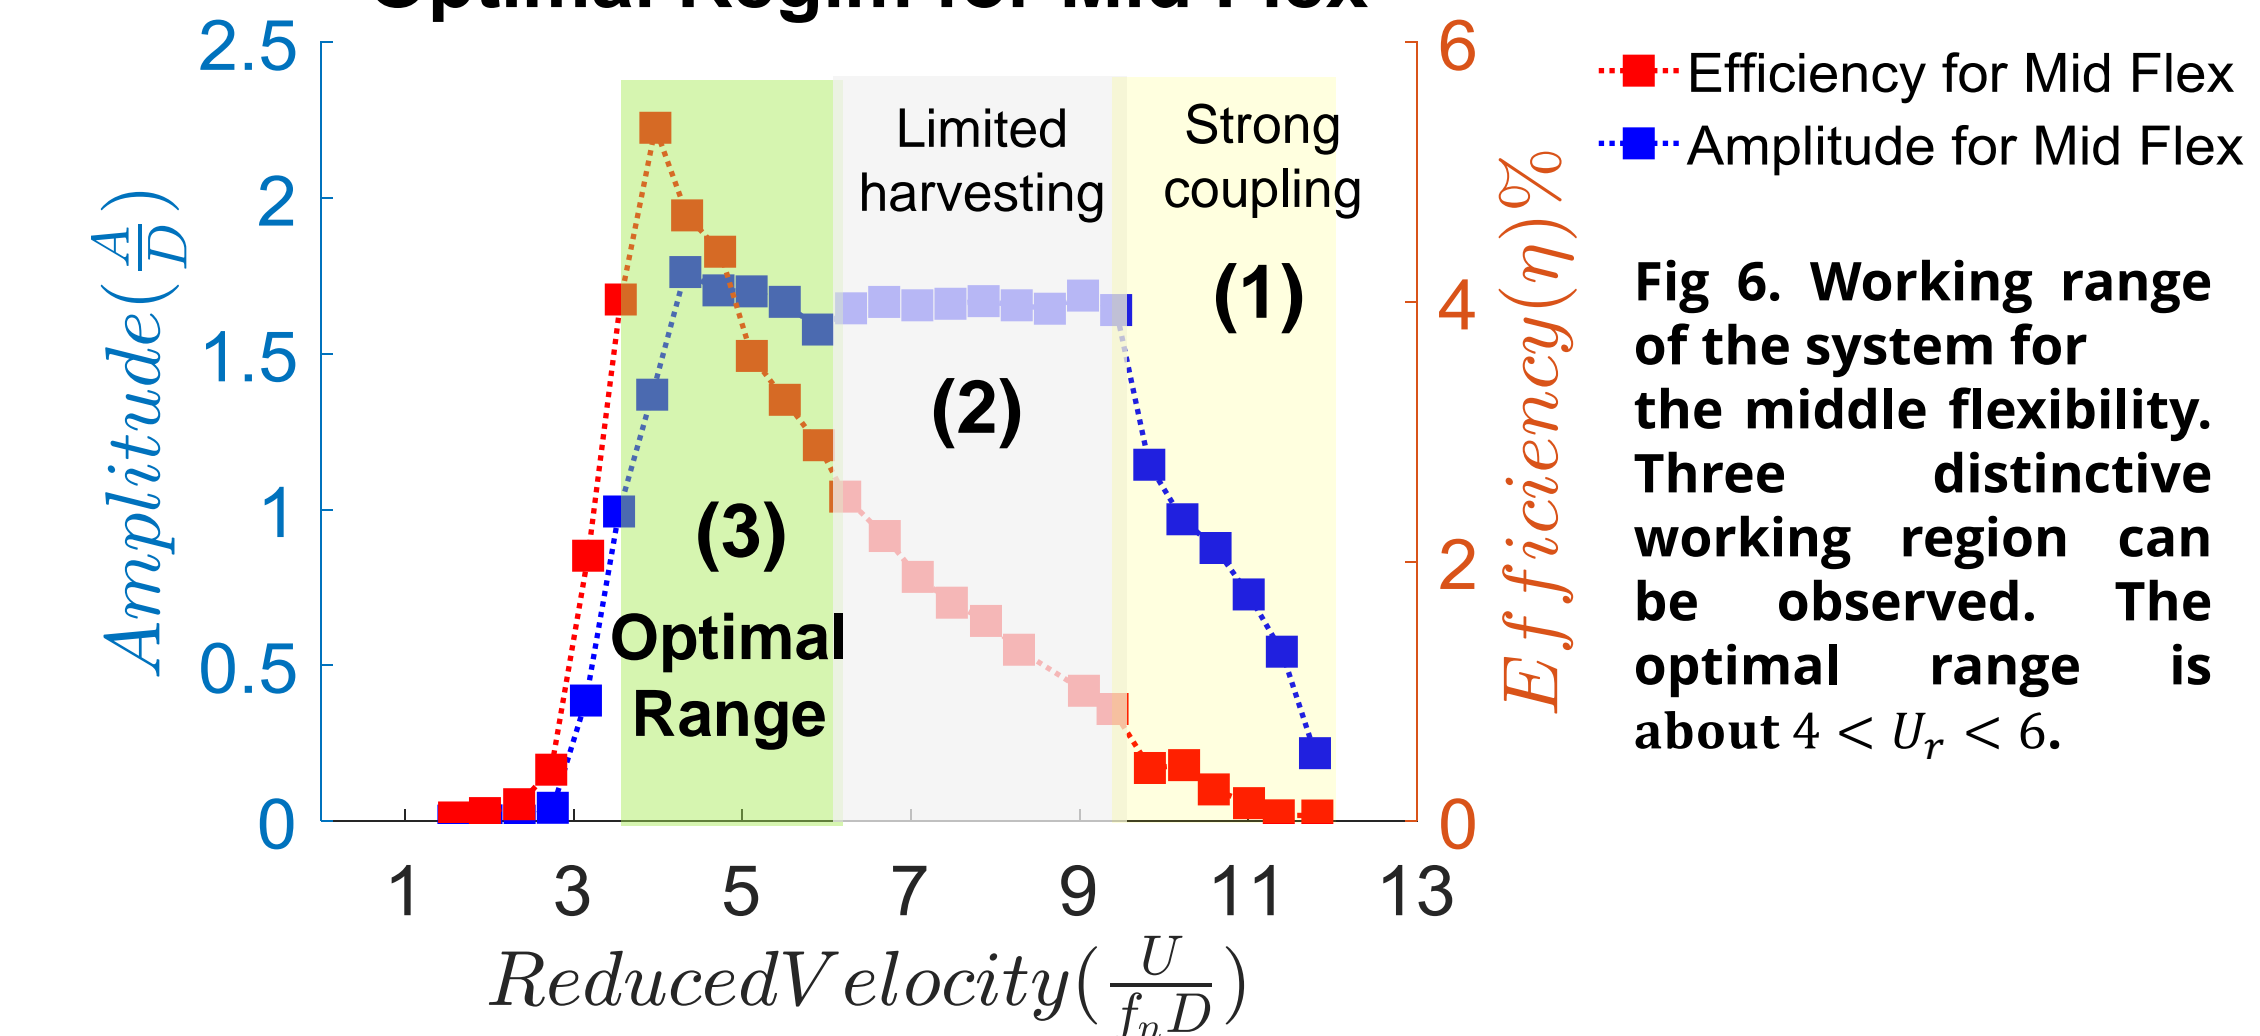


Fig 6. Working range of the system for the middle flexibility. Three distinctive working region can be observed. The optimal range is about $4 < U_r < 6$.

- (1) **Strong coupling:** vibrations are damped out which reduced the harvested energy and efficiency.
- (2) **Limited harvesting:** The vibration amplitude is large, however the harvesting efficiency is very limited. Basically, the solid does not see we are taking energy out from it and the cylinder dynamics are marginally impacted.
- (3) **Optimal range:** The optimum regime the vibrations are modified due to energy extraction but not completely mitigated

Conclusion

- We introduced a new energy harvesting device consist of a rigid cylinder attached to a flexible plate with a coil and magnet. We investigated the effect of root flexibilities and reduced velocity on the range of the achievable amplitude, power, and efficiency. We found that higher flexibility resulted in increasing the frequency of oscillations with a reduction in the reduced velocity. We obtained the optimal range of the working system which the region of both high oscillation amplitude efficiency. This bio-inspired design has potentials for future electricity generations from tidal currents. The proposed work can be used in arrays of cylinders to work as a collaborative system and possibly increase the system efficiency.

Acknowledgements

This work was supported by:
 • National Science Foundation, NSF CAREER Grant No. 1751548, NSF REU and DURIP, Office of Naval Research

References

- [1] Kazemi, A., Van de Riet, K. and Curet, O.M., 2018. Drag coefficient and flow structure downstream of mangrove root-type models through PIV and direct force measurements. *Physical Review Fluids*, 3(7), p.073801.
- [2] Kazemi, A., Van de Riet, K. and Curet, O.M., 2017. Hydrodynamics of mangrove-type root models: the effect of porosity, spacing ratio and flexibility. *Bioinspiration & biomimetics*, 12(5), p.056003.
- [3] Feng, C.C. The Measurements of Vortex Induced Effects in Flow Past a Stationary and Oscillating Circular and D-Section Cylinders. The University of British Columbia, Vancouver, BC, Canada, 1968.
- [4] Khalak, A.; Williamson, C.H.K. Investigation of the relative effects of mass and damping in vortex induced vibration of a circular cylinder. *J. Wind Eng. Ind. Aerodyn.* 1997, 69–71, 341–350.
- [5] Blevins, R.D., Coughran, C.S., 2009. Experimental investigation of vortex-induced vibration in one and two dimensions with variable mass, damping, and Reynolds number. *J. Fluid Eng.* 131 (10), 101202.