

# Sediment Budgeting as a Tool for Sustainable Sediment Mining: Case Study from a Bedrock River in Peninsular India

Tanya Shukla<sup>1</sup> and Vikrant Jain<sup>1</sup>

<sup>1</sup>Indian Institute of Technology Gandhinagar

November 22, 2022

## Abstract

The spatio-temporal variability of river processes is governed by the balance between basin scale sediment supply and channel transport capacity. This balance is being altered by rampant sediment mining from the rivers which results in channel alteration and loss of physical habitat. The sediment mining guidelines are mostly based on empirical approaches and do not consider the spatio-temporal variability of river processes. This study includes hydrologic and geomorphic analysis to understand sediment dynamics and to suggest guidelines for sediment mining. The study was carried out in the 1312 km long Narmada River basin, Central India using hydrological data (1987-2015), SRTM DEM and LULC data. We identified the major aggrading river reaches (100s of km long) on the basis of reach scale sediment mass balance analysis. These reaches are dominantly aggrading at the rate of ~50,000 tons/km/yr. Sediment yield values were used to identify major erosion hot spots in the river basin and its contribution to spatial variability in aggradation-degradation processes in the river channel. This spatial variability within channel was also ascertained through stream power and sediment supply relationship. Further, temporal variability in channel processes was observed in the aggrading reaches. This variability is mostly governed by sediment concentration. Higher sediment concentration (~1.5 g/l) in a given month may change degrading reaches into aggrading reaches. Spatial variability within aggrading reaches and sediment contribution from different sub-basins was further assessed through application of semi-distributed process based Soil and Water Assessment Tool (SWAT). SWAT-CUP yielded good calibration results (~40% of the measured data bracketed under the 95PPU envelope, for discharge and sediment load). SWAT was found to be suitable to analyze sediment yield distribution at HRU scale in the Narmada River basin, except for smaller and steeper subbasins where hillslope processes dominate. Further, spatial variability within these reaches was identified by analysis of bar dynamics. Satellite data based change detection analysis was used to identify aggrading channel bars. These bars may be focused for sand mining operations within the aggrading reaches, although limited to ~20% change in the sediment bar area.





# Sediment budgeting as a tool for sustainable sediment mining: Case study from a bedrock river in Peninsular India

Tanya Shukla\*, Vikrant Jain  
Indian Institute of Technology Gandhinagar, India

AGU 100 FALL MEETING  
Washington, D.C. | 10-14 Dec 2018

EP33C-2435

## A multiscale hydrogeomorphic approach for suspended sediment dynamics and budgeting, with reference to sediment mining

### 1 River processes using sediment budgeting


- River processes are controlled by balance between sediment supply and channel transport capacity.
- Sediment budgeting involves accounting of sources and behavior of sediment as it travels from its point of origin to exit from a drainage basin. [1]
- The approach has been applied globally for applications ranging from geomorphic process understanding and stream management. [1-5]
- This study: merges hydrology based stream power distribution and sediment budget to understand channel dynamics with reference to sediment mining

### 2 A multidisciplinary approach to sustainable sediment mining

- Assessment of spatiotemporal variability of aggradation and degradation processes through cross scalar stream power and sediment yield relationship.
- SWAT (Soil and Water Assessment Tool) [6] based watershed modelling to account for smaller tributary processes.
- Development of process based understanding of channel morphology by integrating sediment budgeting and planform morphology.
- Evaluation of geomorphic threshold to explain spatiotemporal variability in morphological changes using the Maximum Flow Efficiency (MFE) principle. [7]

Figure 1

Topographic map of the study area and its geographical location. Gauge stations and major dams in the basin are also shown.

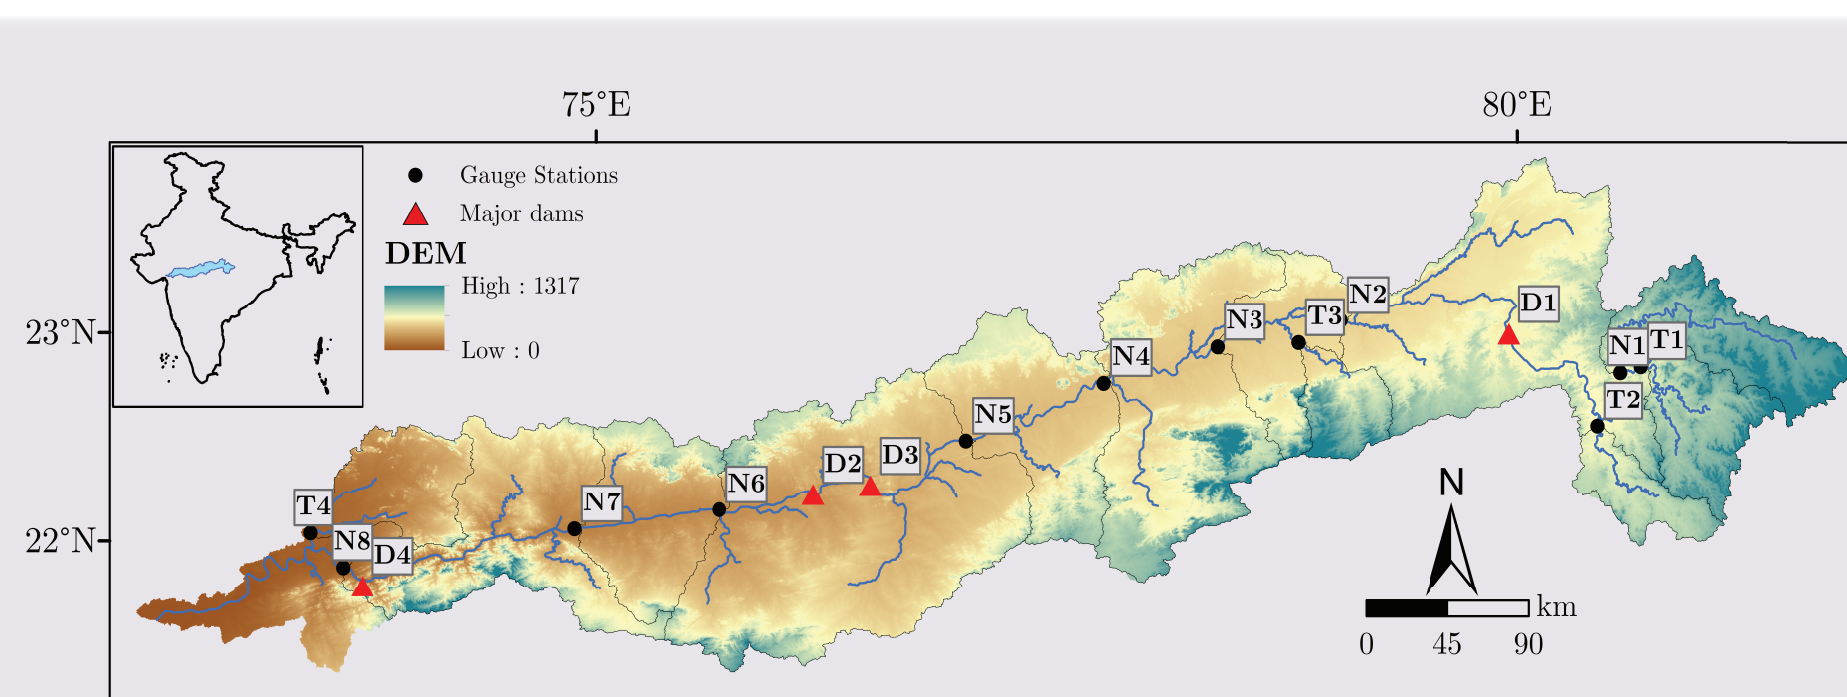

### 3 Narmada River basin and Methodology used

- Monsoon dominated, 1300 km long,  $1 \times 10^5 \text{ km}^2$  area. Discharge and suspended sediment concentration data for 12 gauge stations in the basin (8 along main channel + 4 on tributaries).
- Semi distributed hydrologic model: SWAT to account for smaller tributaries. Parameterization and uncertainty analysis using SWAT-CUP
- Sediment mass balance =  $u/s - d/s$  sediment load, at long term and monthly timescales

### 4 Results: Sediment sources and sinks: Process controls

#### Basin scale sediment supply

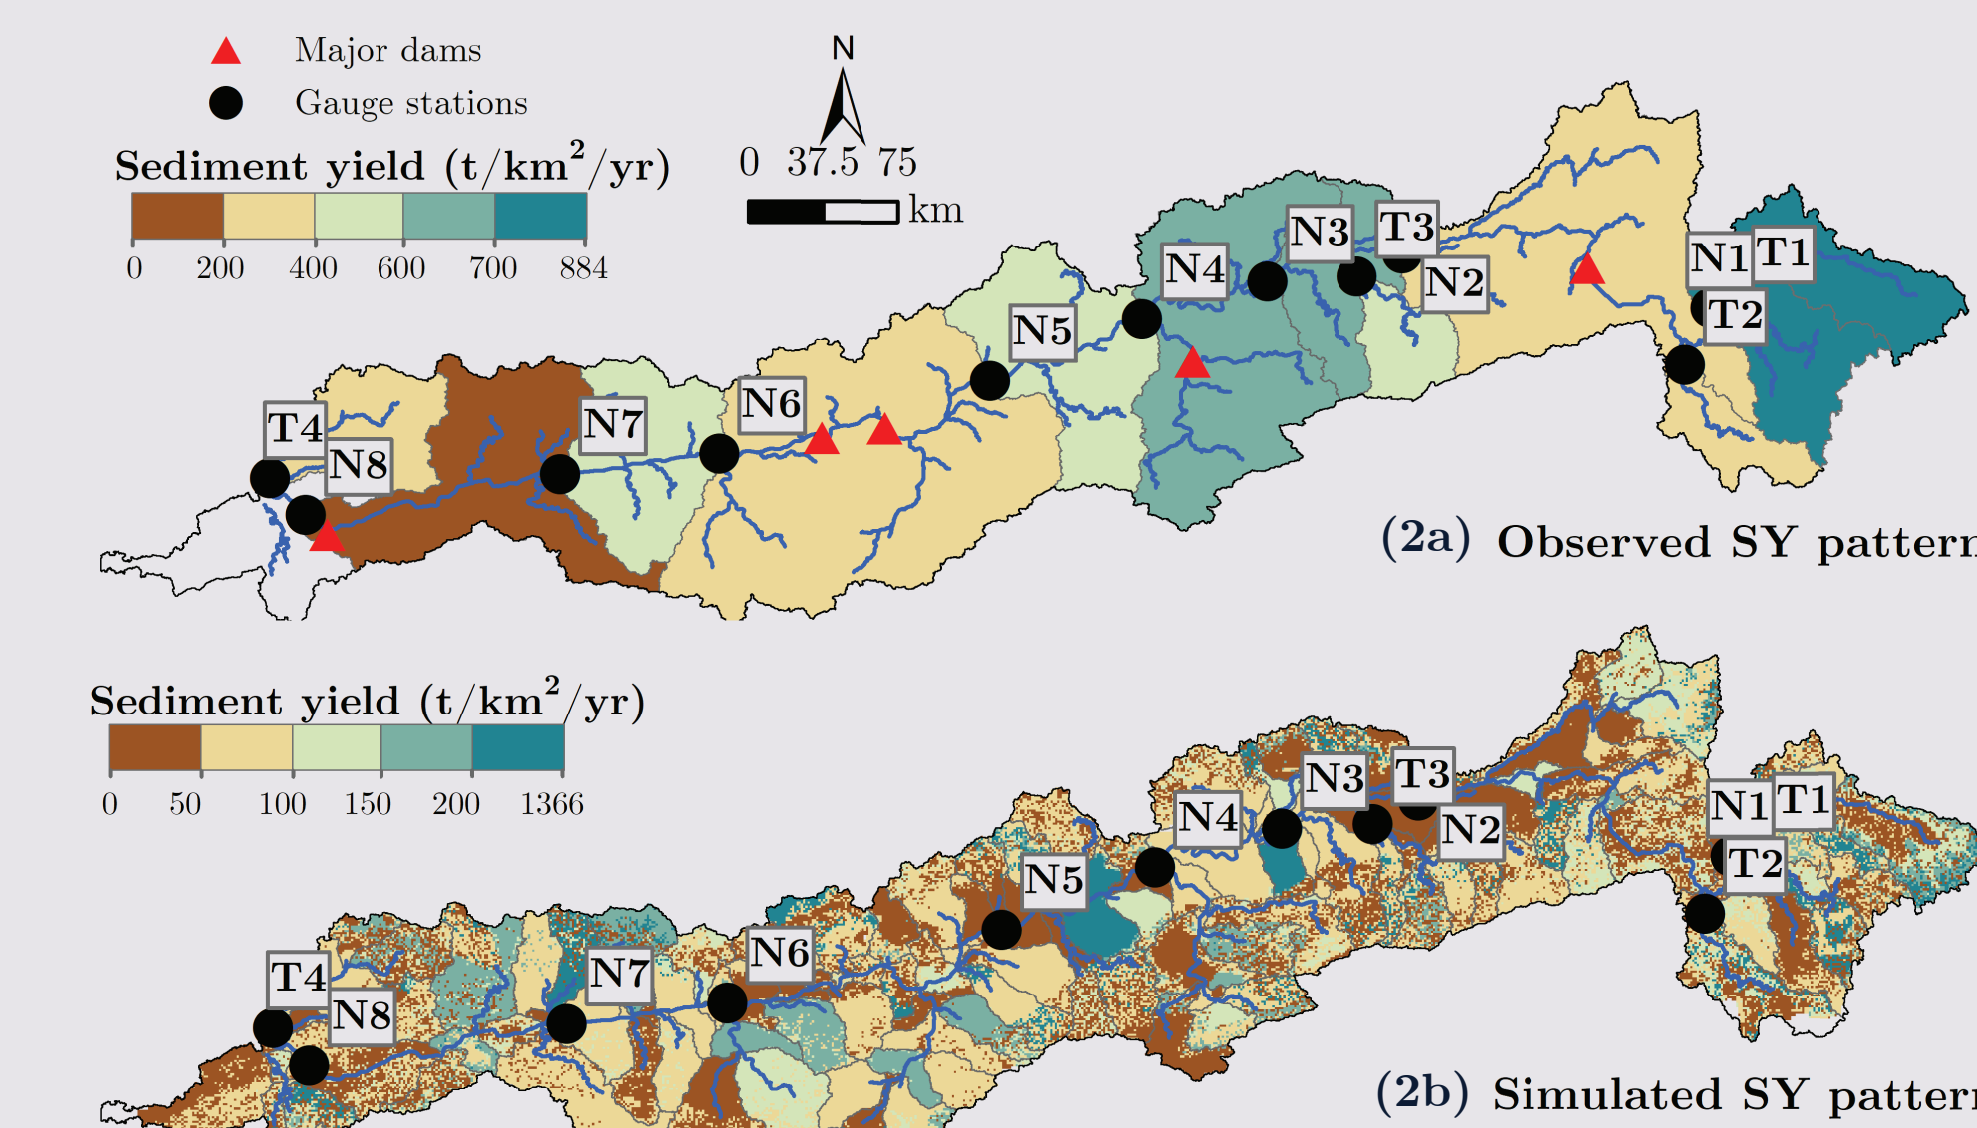


Figure 2

Sediment yield distribution based on (a) observed data from 12 gauge stations (b) SWAT, calibrated at N6 site. Figure indicates the suitability and advantage associated with hydrological modelling using SWAT in informing river management deci-

#### Reach scale sediment budget

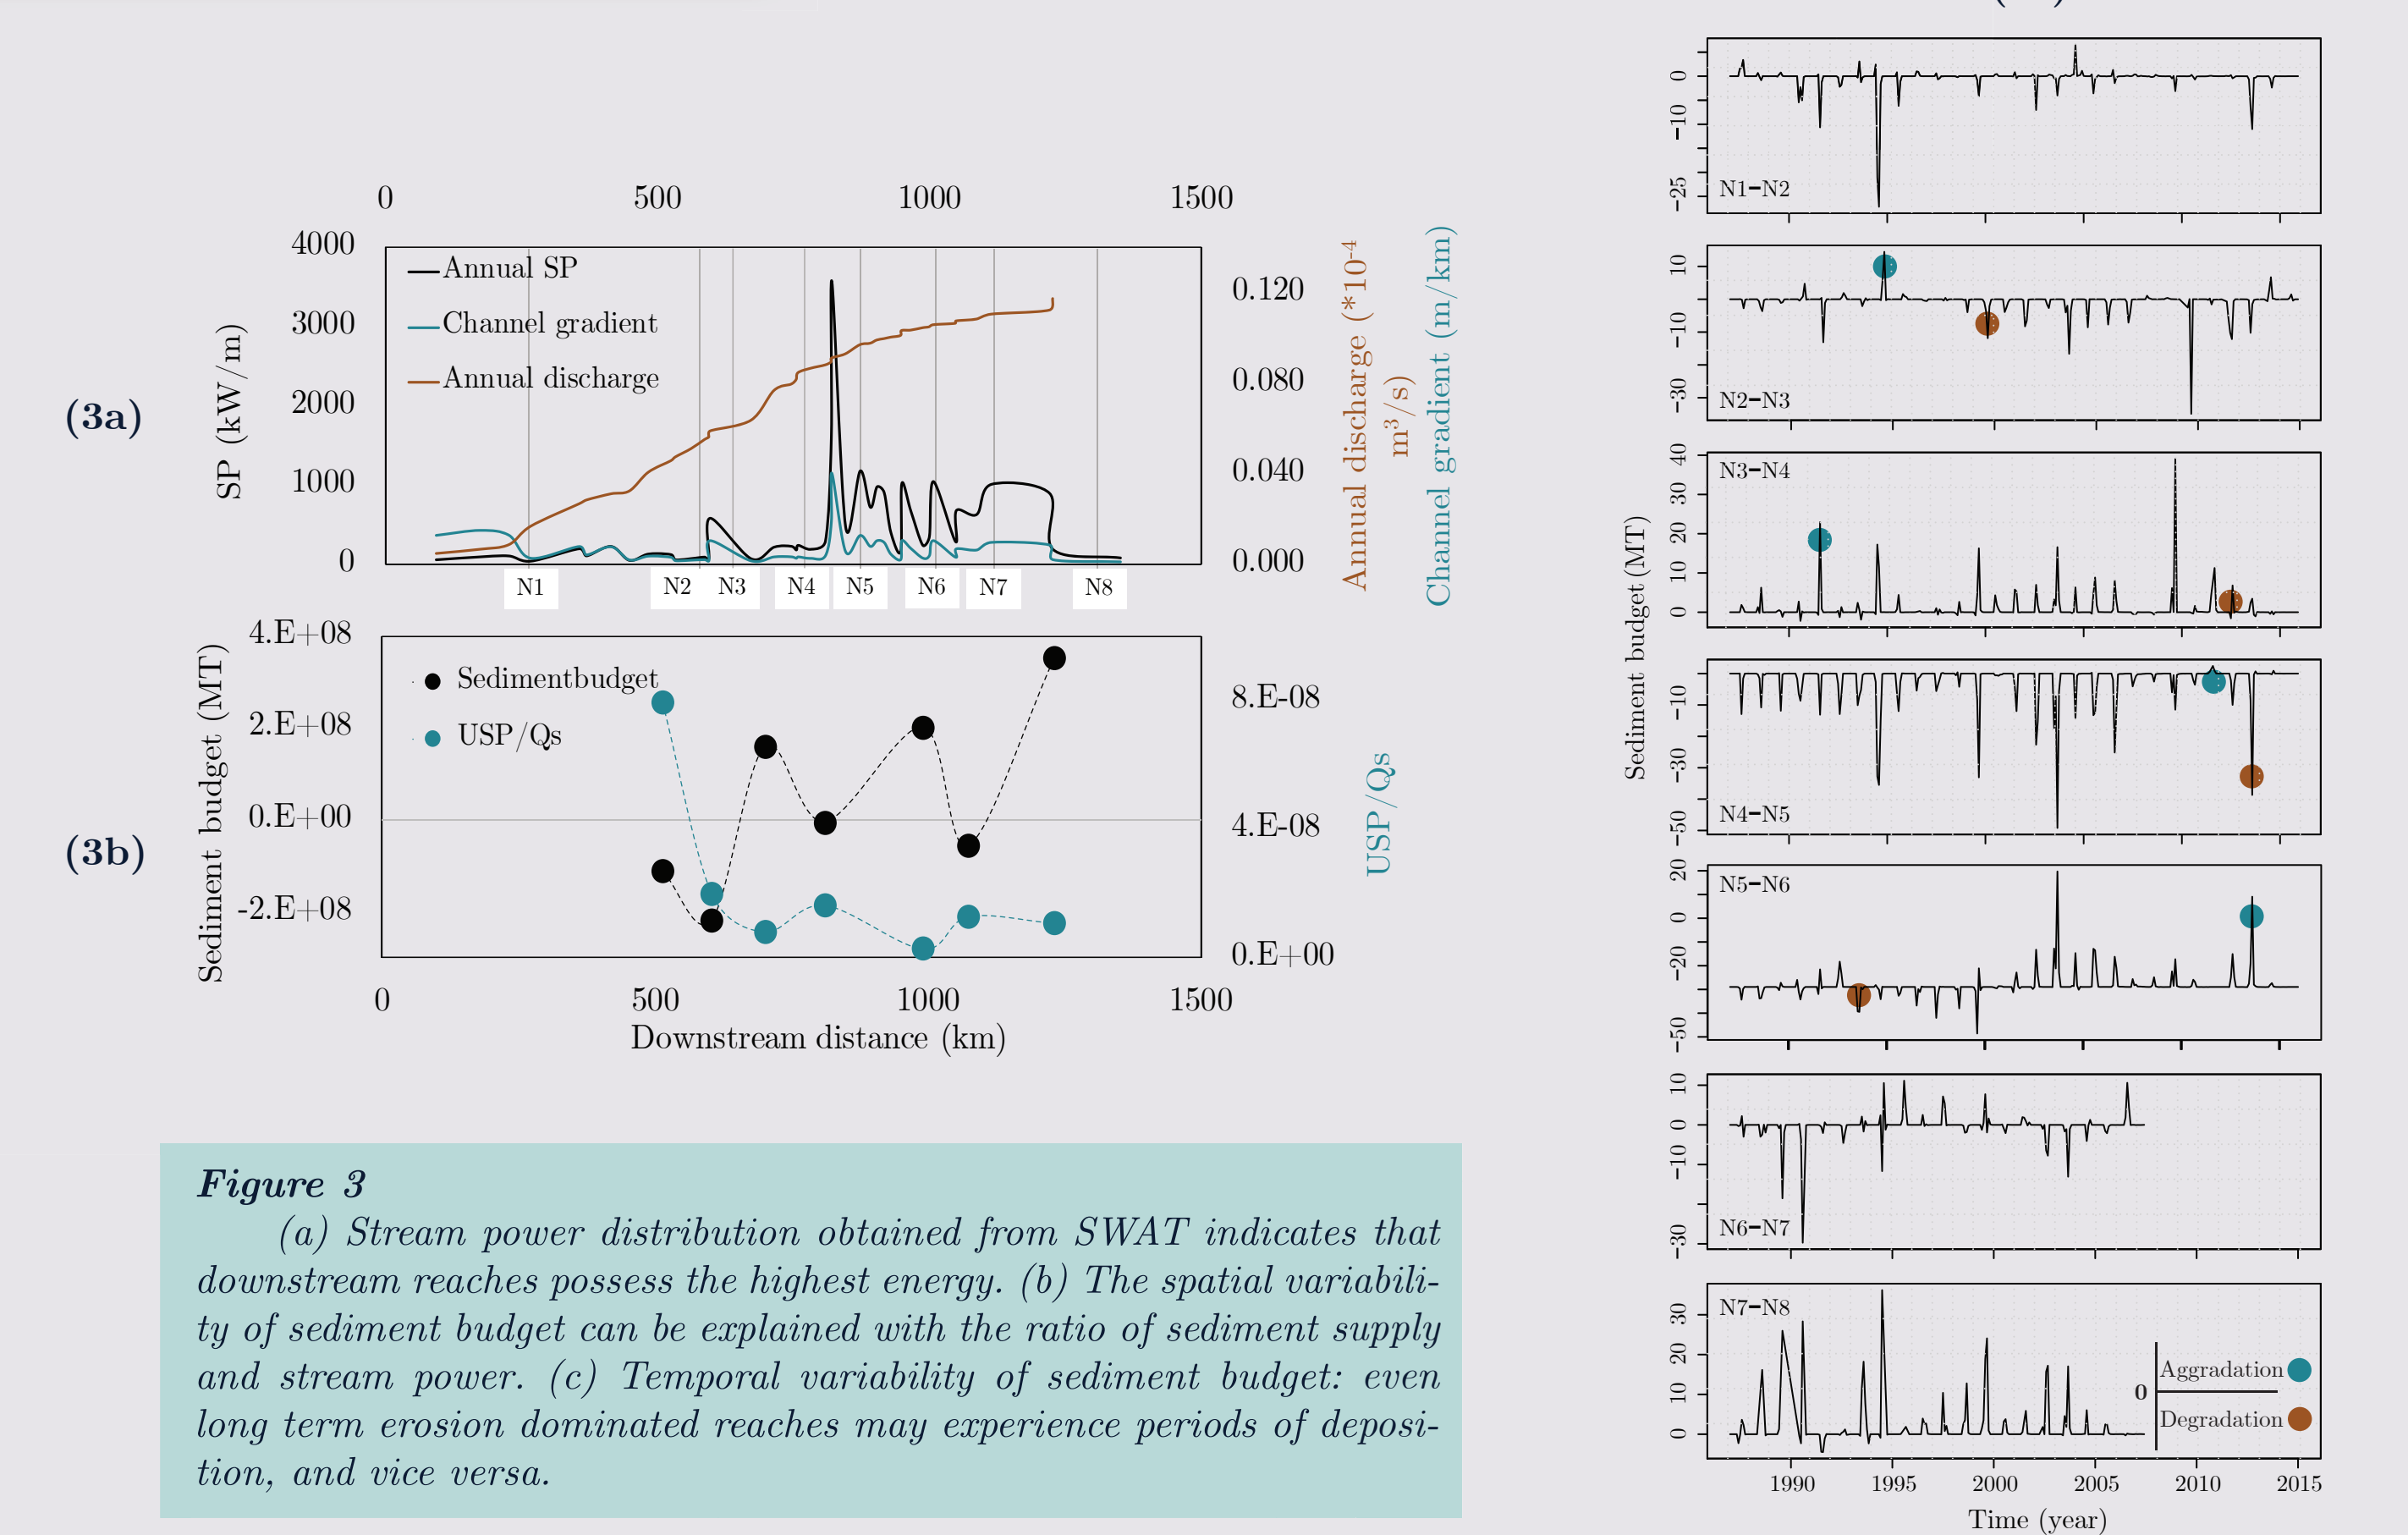


Figure 3

(a) Stream power distribution obtained from SWAT indicates that downstream reaches possess the highest energy. (b) The spatial variability of sediment budget can be explained with the ratio of sediment supply and stream power. (c) Temporal variability of sediment budget: even long term erosion dominated reaches may experience periods of deposition, and vice versa.

#### Relationship between sediment budget and channel morphology

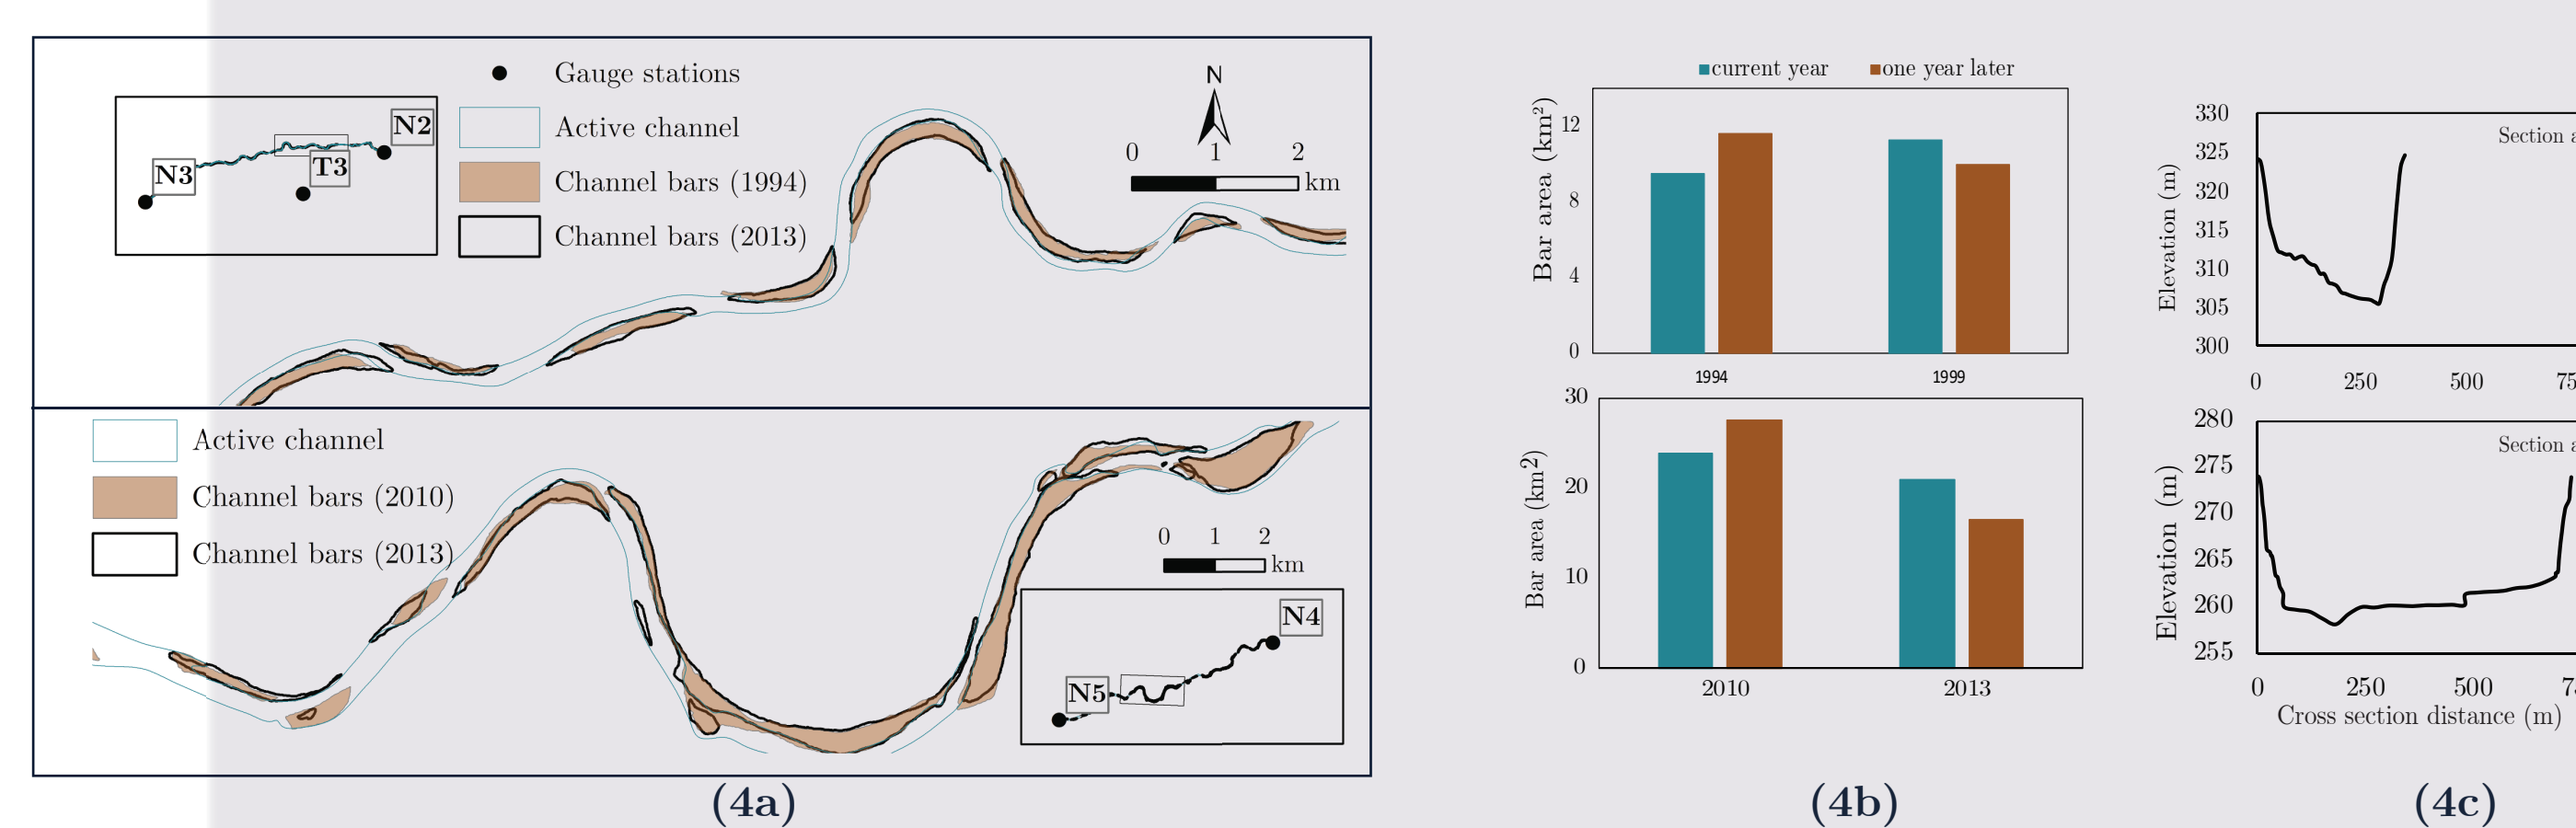


Figure 4

Reach wise morphological mapping of the Narmada River basin. (a) shows the reach scale morphological features and their temporal variability across the study period. (b) shows the quantitative change in the bar area for the chosen events. (c) represents the cross-section of the downstream station.

### 5 Discussion: Fluvial process dynamics in Narmada River

- Sediment budget:
  - Erosion sites
    - Basin scale: subbasins draining to stations N1, T1, N3-N4
    - Channel scale: reaches N1-N2, N2-N3 and N6-N7
  - Deposition sites: reaches N3-N4, N4-N5 and N7-N8
- Threshold:
  - Spatial variability: explained by ratio of sediment yield and unit stream power. Aggrading reaches-  $USP/Q_s > 1$
  - Temporal variability: explained by sediment concentration. A threshold of 1.5 g/l was determined for aggradation processes in dominantly degrading reaches.
- Suggestions for sediment mining:
  - Midstream reaches which were dominantly aggrading shall be focused.
  - Rate of bar skimming not exceeding 0.25 m/yr in midstream reaches.
  - Temporal variability of sediment supply shall be monitored.

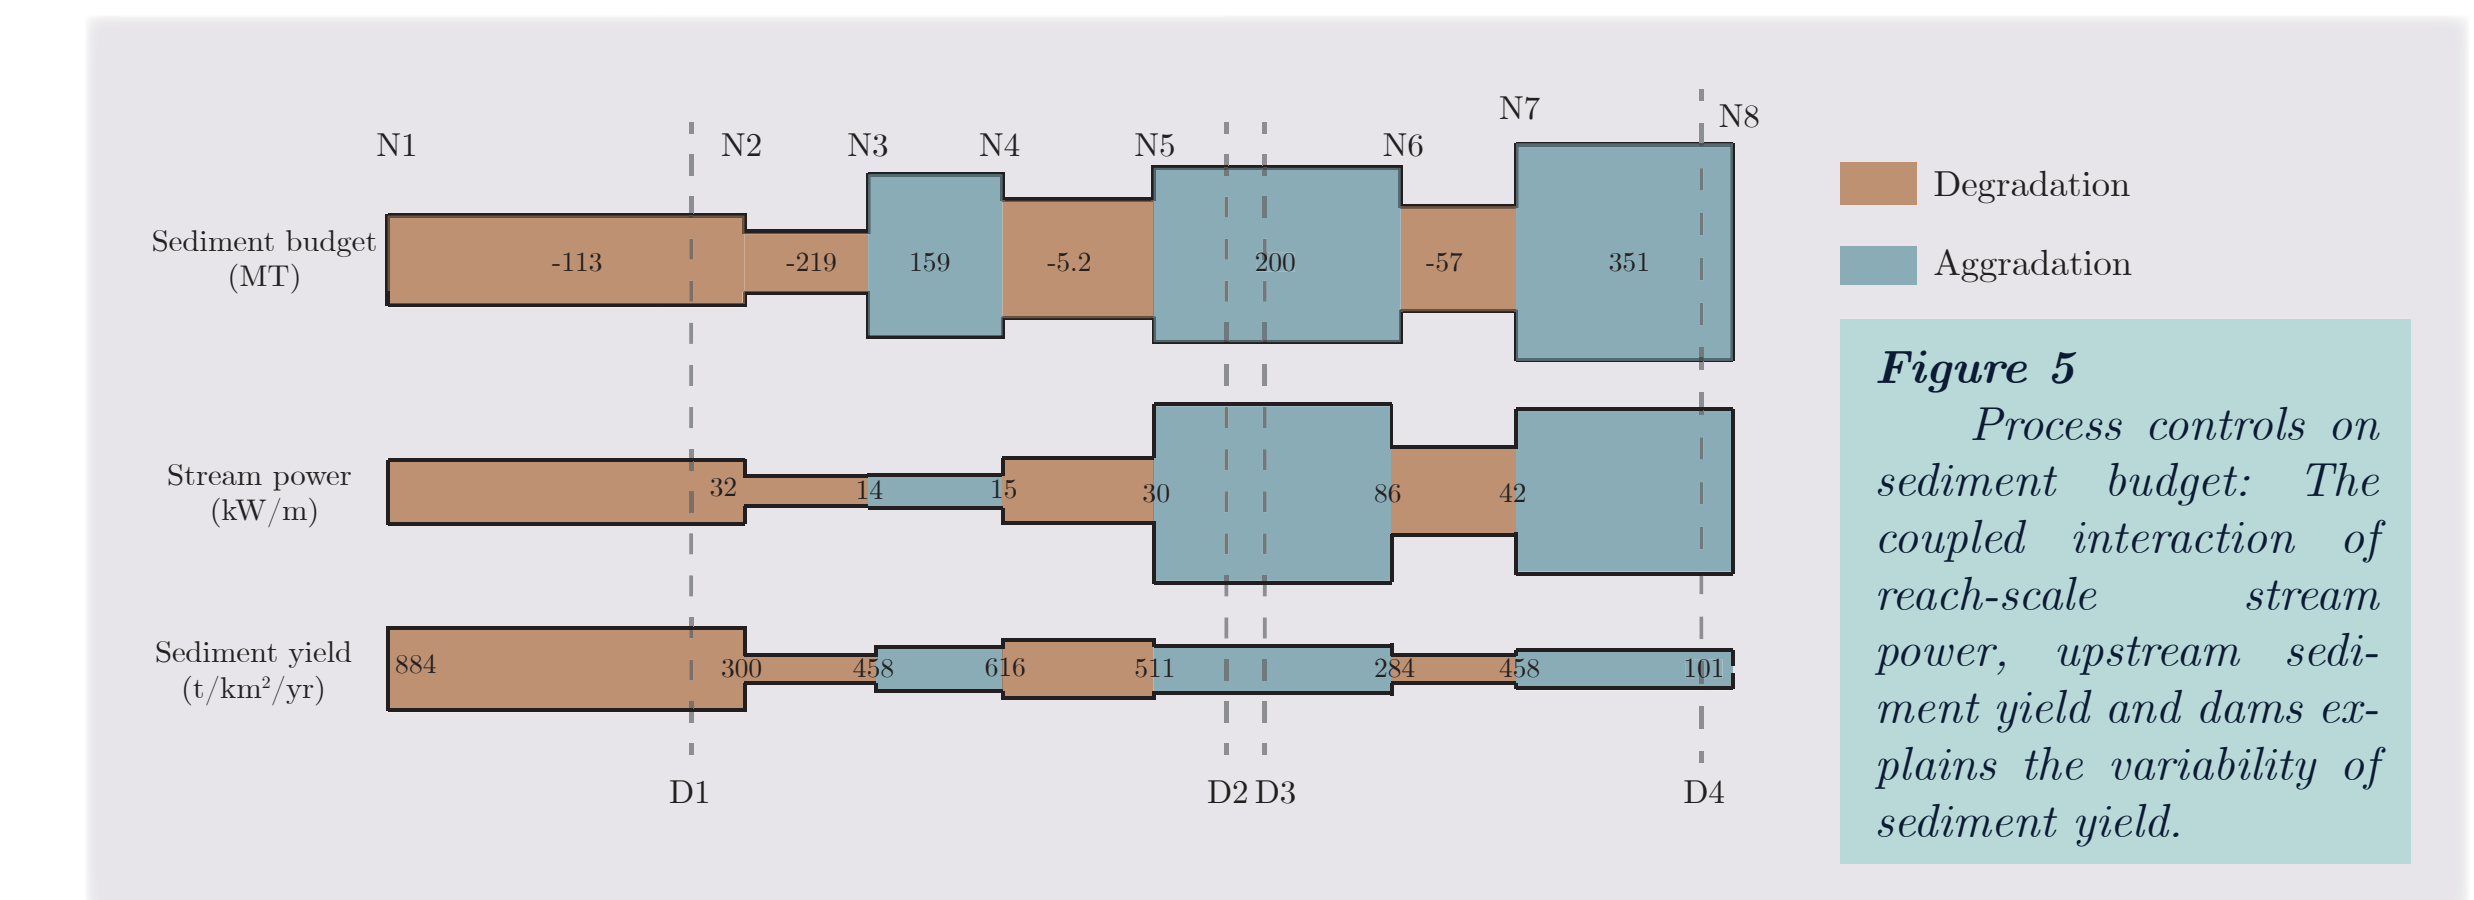


Figure 5  
Process controls on sediment budget: The coupled interaction of reach-scale sediment budget, stream power, upstream sediment yield and dams explains the variability of sediment yield.

### 6 Conclusions

- Based on the SY distributions, the upstream and midstream reaches (N1, N3, N4) were the hotspots of sediment erosion.
- Based on the sediment budgeting approach, midstream and downstream reaches were deposition dominated with up to 350 MT of sediment surplus, explained by variability of sediment yield and stream power.
- Even within the deposition dominated reaches, morphological mapping revealed that bar dynamics may be different from reach scale dynamics, which is also controlled by the channel cross section.

### 7 References

- [1] Reid, L. M. and Dunne, T. (1996) Rapid evaluation of sediment budgets. Catena.
- [2] Belmont, P. et al. (2011) 'Large shift in source of fine sediment in the Upper Mississippi River', Environmental science & technology. ACS Publications, 45(20), pp. 8804-8810.
- [3] Rinaldi, M., Wyżga, B. and Surian, N. (2005) 'Sediment mining in alluvial channels: physical effects and management perspectives', River research and applications 21(7), pp. 805-828.
- [4] Roy, N. and Sinha, R. (2007) 'Understanding confluence dynamics in the alluvial Ganga-Ramganga valley, India: An integrated approach using geomorphology and hydrology', Geomorphology, 92(3), pp. 182-197.
- [5] Walling, D. E. et al. (2002) 'Establishing sediment budgets for two small lowland agricultural catchments in the UK', CATENA, 47(4), pp. 323-353.
- [6] Arnold, J. G. et al. (1998) 'Large area hydrologic modeling and assessment part i: model development', JAWRA Journal of the American Water Resources Association, 34(1), pp. 73-89.
- [7] Huang, H. Q. and Nanson, G. C. (2000) 'Hydraulic geometry and maximum flow efficiency as products of the principle of least action', Earth Surface Processes and Landforms: 25(1), pp. 1-16.