

Variational Full-waveform Inversion

Xin Zhang¹ and Andrew Curtis²

¹School of Geosciences

²University of Edinburgh

November 26, 2022

Abstract

Seismic full-waveform inversion (FWI) can produce high resolution images of the Earth's subsurface. Since full waveform modelling is significantly nonlinear with respect to velocities, Monte Carlo methods have been used to assess image uncertainties. However, because of the high computational cost of Monte Carlo sampling methods, uncertainty assessment remains intractable for larger data sets and 3D applications. In this study we propose a new method called variational full-waveform inversion (VFWI), which uses Stein variational gradient descent (SVGD) to solve FWI problems. We apply the method to a 2D synthetic example and demonstrate that the method produces accurate approximations to those obtained by Hamiltonian Monte Carlo (HMC). Since variational inference solves the problem using optimization, the method can be applied to larger datasets and 3D applications by using stochastic optimization and distributed optimization.

Variational full-waveform inversion

Xin Zhang¹ and Andrew Curtis¹

¹School of Geosciences, University of Edinburgh, Edinburgh, United Kingdom

Key Points:

- We applied Stein variational gradient descent to probabilistic seismic full-waveform inversion
- We apply the method to a synthetic example, producing similar probabilistic results to Hamiltonian Monte Carlo.
- The variational method can be applied to larger data sets and 3D applications

Corresponding author: Xin Zhang, x.zhang2@ed.ac.uk

Abstract

Seismic full-waveform inversion (FWI) can produce high resolution images of the Earth’s subsurface. Since full waveform modelling is significantly nonlinear with respect to velocities, Monte Carlo methods have been used to assess image uncertainties. However, because of the high computational cost of Monte Carlo sampling methods, uncertainty assessment remains intractable for larger data sets and 3D applications. In this study we propose a new method called variational full-waveform inversion (VFWI), which uses Stein variational gradient descent (SVGD) to solve FWI problems. We apply the method to a 2D synthetic example and demonstrate that the method produces accurate approximations to those obtained by Hamiltonian Monte Carlo (HMC). Since variational inference solves the problem using optimization, the method can be applied to larger datasets and 3D applications by using stochastic optimization and distributed optimization.

1 Introduction

Seismic full-waveform inversion (FWI) is a method which characterizes properties of the Earth’s subsurface by exploiting information throughout recorded seismic waveforms (Lailly & Bednar, 1983; Tarantola, 1984; Gauthier et al., 1986; Pratt et al., 1998; Pratt, 1999; Tromp et al., 2005). The method has been used successfully from industrial scale (Prioux et al., 2013; Warner et al., 2013; Shen et al., 2018), regional scale (Chen et al., 2007; Tape et al., 2009; Fichtner et al., 2009; Tape et al., 2010) to global scale (French & Romanowicz, 2014; Bozdağ et al., 2016; Fichtner et al., 2018).

The FWI problem is often solved using optimization by minimizing a misfit function between observed and predicted seismograms. Since the problem is highly non-linear with multi-modal objective functions, a poor starting model can cause convergence to incorrect solutions. Apart from finding an adequate starting model, numerous misfit functions that can reduce multi-modalities have been proposed (Luo & Schuster, 1991; Gee & Jordan, 1992; Fichtner et al., 2008; Brossier et al., 2010; Van Leeuwen & Mulder, 2010; Bozdağ et al., 2011; Métivier et al., 2016). Nevertheless, although optimization has been used widely in practical applications, the method cannot provide accurate uncertainty estimations which makes it difficult to assess and interpret the results of FWI.

Monte Carlo sampling methods provide a procedure to solve general non-linear problems and quantify uncertainties (Brooks et al., 2011). The methods have been applied to travel time tomography (Bodin & Sambridge, 2009; Galetti et al., 2015; Hawkins & Sambridge, 2015; Zhang et al., 2018, 2019) and FWI (Ray et al., 2016, 2017; Biswas & Sen, 2017; Gebraad et al., 2019). However, Monte Carlo sampling methods are computationally expensive and remains intractable for large data sets due to the curse of dimensionality (Curtis & Lomax, 2001). To extend nonlinear uncertainty analysis to larger systems, M. A. Nawaz and Curtis (2018); M. Nawaz and Curtis (2019) and Zhang and Curtis (2019) introduced variational inference methods to Geophysics, and Zhang and Curtis (2019) applied them to seismic travel time tomography. By optimizing a different formulation of the inverse problem, variational inference methods can be more efficient than Monte Carlo sampling methods (Bishop, 2006; Blei et al., 2017), can be applied to larger systems by using methods like stochastic optimization (Robbins & Monro, 1951; Kubrusly & Gravier, 1973) and distributed optimization, and provide uncertainties in the form of marginal probability distributions on parameters (M. A. Nawaz & Curtis, 2018; M. Nawaz & Curtis, 2019; Zhang & Curtis, 2019).

In this study we apply variational inference methods to FWI, which we refer as variational full-waveform inversion (VFWI). Specifically we use Stein variational gradient descent (SVGD) to solve FWI problems because SVGD can produce accurate approximations to the results of Monte Carlo sampling methods (Zhang & Curtis,

2019). In section 2 we provide a brief overview of SVGD and FWI. In section 3 we apply the method to a 2D synthetic test and compare the results with those obtained by Hamiltonian Monte Carlo (HMC). We then provide a discussion about the possibility to apply the method to larger systems and 3D applications.

2 Methods

2.1 Stein variational gradient descent (SVGD)

Bayesian methods update a *prior* probability density function (pdf) $p(\mathbf{m})$ with new information from the data to produce a probability distribution of model parameters post inversion, which is often called a *posterior* pdf, written as $p(\mathbf{m}|\mathbf{d}_{obs})$. According to Bayes' theorem,

$$p(\mathbf{m}|\mathbf{d}_{obs}) = \frac{p(\mathbf{d}_{obs}|\mathbf{m})p(\mathbf{m})}{p(\mathbf{d}_{obs})} \quad (1)$$

where $p(\mathbf{d}_{obs}|\mathbf{m})$ is the *likelihood*, which is the probability of observing data \mathbf{d}_{obs} if model \mathbf{m} was true, and $p(\mathbf{d}_{obs})$ is a normalization factor called the *evidence*. The likelihood function is often represented as the exponential of a misfit function $\mathcal{L}(\mathbf{d}_{obs}, \mathbf{m})$,

$$p(\mathbf{d}_{obs}|\mathbf{m}) = \frac{1}{C} \exp(-\mathcal{L}(\mathbf{d}_{obs}, \mathbf{m})) \quad (2)$$

where C is the normalization factor. This process is called Bayesian inference.

Bayesian inference is often solved by using Markov chain Monte Carlo (MCMC) methods. However, due to the high computational expense of Monte Carlo methods, they cannot easily be applied to large datasets which are often expensive to simulate given a set of model parameters. Variational inference provides a different way to solve Bayesian inference problems: the method seeks an optimal approximation to the posterior pdf within a predefined family of distributions, by minimizing the Kullback-Leibler (KL) divergence (Kullback & Leibler, 1951) between the approximate probability distribution and the posterior probability distribution (Blei et al., 2017). Since variational inference solves Bayesian inference problems using optimization, it can be more efficient than Monte Carlo sampling methods (Blei et al., 2017; Zhang & Curtis, 2019).

Stein variational gradient descent (SVGD) is one such algorithm based on iterative incremental transforms of the prior pdf (Liu & Wang, 2016). In SVGD, a smooth transform $T(\mathbf{m}) = \mathbf{m} + \epsilon\phi(\mathbf{m})$ is used, where $\mathbf{m} = [m_1, \dots, m_d]$ and m_i is the i^{th} parameter, and $\phi(\mathbf{m}) = [\phi_1, \dots, \phi_d]$ is a smooth vector function that describes the perturbation direction and where ϵ is the magnitude of the perturbation. SVGD minimizes the KL-divergence by iteratively applying the transform to the current approximate probability distribution which is represented using a set of particles. At each iteration the perturbation $\phi(\mathbf{m})$ is determined by seeking the steepest descent direction that minimizes the KL-divergence (Liu & Wang, 2016). The method has been introduced to geophysics to solve 2D seismic travel time tomographic problems by Zhang and Curtis (2019). In this study we use SVGD to solve VFWI problems.

2.2 Full-waveform inversion (FWI)

FWI uses full waveform information to image the Earth's subsurface. In this study we solve a P-SV wave system along a 2D vertical cross section of isotropic wave velocities and density. The wave equation is solved by using a fourth-order variant of the staggered-grid finite difference scheme (Virieux, 1986; Gobraad et al., 2019). The gradients with respect to velocities and density are calculated using the adjoint method (Tarantola, 1988; Liu & Tromp, 2006; Fichtner et al., 2006; Plessix, 2006;

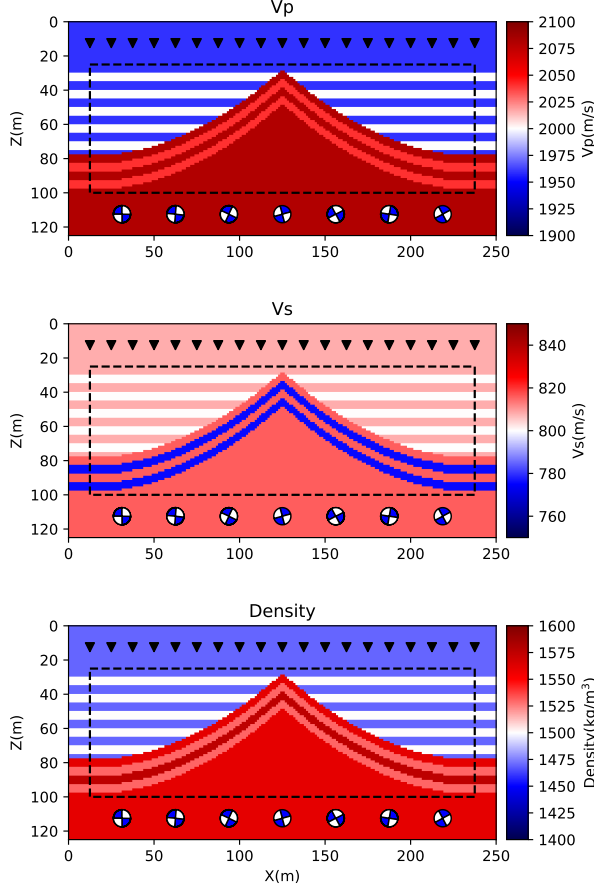


Figure 1. The true model for V_p , V_s and density. The dashed black line indicates the study region within which parameters are inverted. Sources are located at the bottom which are represented by beachballs and receivers are shown with black triangles.

Virieux & Operto, 2009) and are used to transform the pdf in the SVGD algorithm. For the misfit function, we choose the L_2 waveform difference:

$$\mathcal{L} = \frac{1}{2} \sum_i \left(\frac{d_i^{obs} - d_i(\mathbf{m})}{\sigma_i} \right)^2 \quad (3)$$

where i is the index of time samples and σ_i is the standard deviation of each data point. Since the L_2 misfit is dominated by large amplitude shear waves, it is probably more sensitive to shear velocities than to P-wave velocities. Note that in practice other more advanced misfit functions may be used (Luo & Schuster, 1991; Van Leeuwen & Mulder, 2010; Bozdağ et al., 2011; Métivier et al., 2016).

3 Results

We apply the above method to a 2D synthetic example identical to that in Gebraad et al. (2019) who used a particularly efficient MC method, so that the results can be fairly compared. Figure 1 shows the true model for V_p , V_s and density. Sources are located at the bottom of the region and have random moment tensors. For source-time function we use a Ricker wavelet with dominant frequency of 50 Hz. Receivers

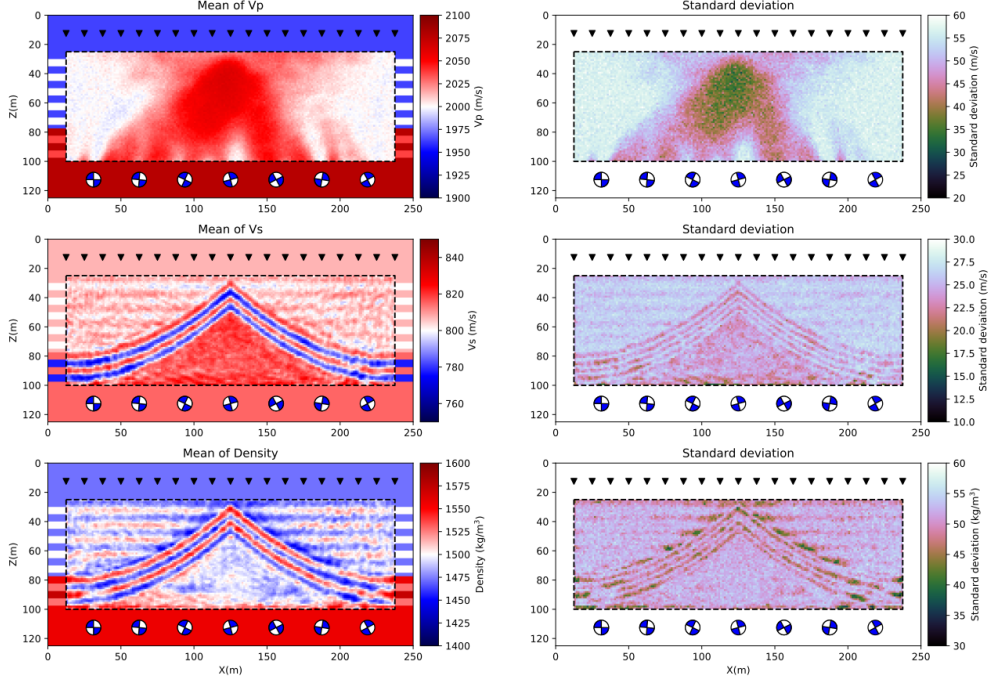


Figure 2. The mean (left) and standard deviation (right) for V_p , V_s and density obtained using SVGD.

are located at the depth of 10 metres near the surface. The data are simulated using the staggered-grid finite difference scheme over a 220×110 gridded discretisation in space, within which a 180×60 sub-grid of cells has free parameters (region within the dashed black box in Figure 1).

To reduce the complexity of the inverse problem we use strong prior information as in Gebraad et al. (2019): Uniform distributions in the interval of 2000 ± 100 m/s for V_p , 800 ± 50 m/s for V_s and 1500 ± 100 kg/m³ for density. For the noise level we use a fixed data variance of $1 \mu\text{m}^2$ as this variance produces a more accurate model when using HMC (Gebraad et al., 2019). For SVGD we use 600 particles which are initially generated from the prior probability distribution. The particles are first transformed to an unconstrained space as in Zhang and Curtis (2019) and updated using 600 iterations. The final particles are transformed back to the original space and are used to calculate mean and standard deviations.

Figure 2 shows the mean and standard deviation models for V_p , V_s and density obtained using SVGD. The mean model of V_s successfully recovers the true model, whereas the mean model of V_p provides a significantly different image to the true model. This is probably because the waveforms are more sensitive to V_s than to V_p , so that large scale structure of V_p can be recovered. The mean model of density shows similar features to the true model near discontinuities, which is likely because waveforms are primarily sensitive to density gradients. In comparison the bottom high density structure is not present in the result.

The standard deviation of V_s shows similar features to the velocity structure. For example, the horizontal higher velocity layers and the bottom high velocity structure have smaller standard deviations. There are higher standard deviations at the boundary of tilted layers which have been observed previously in travel time tomog-

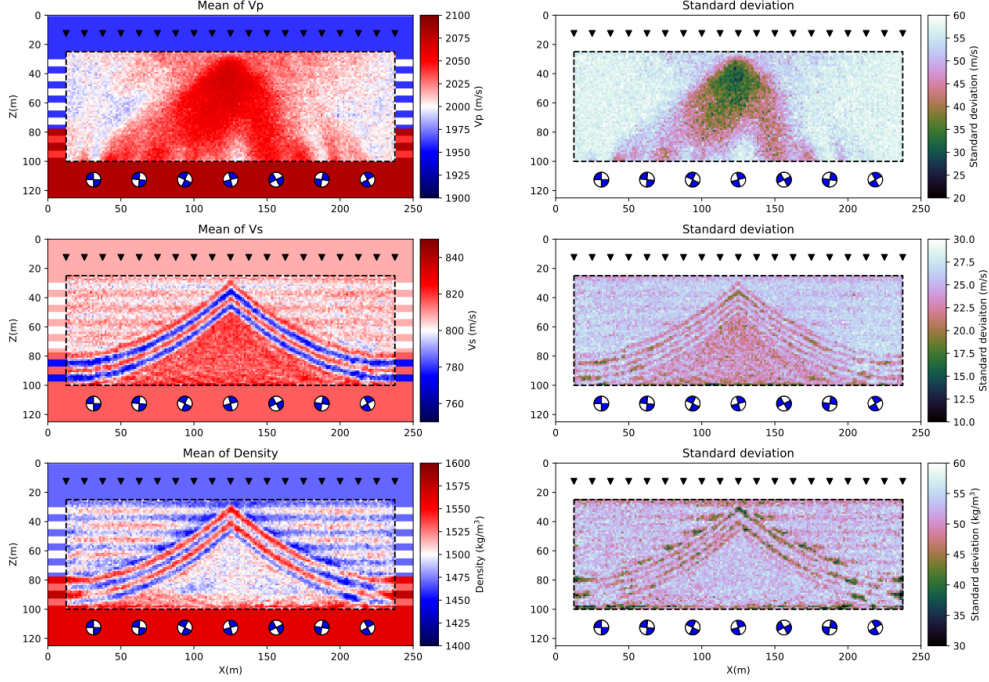


Figure 3. The mean (left) and standard deviation (right) for V_p , V_s and density obtained by Gebraad et al. (2019) using Hamiltonian Monte Carlo.

raphy (Galetti et al., 2015; Zhang et al., 2018; Zhang & Curtis, 2019). This suggests that the location of velocity boundaries are not well-constrained. The standard deviation of V_p shows similar features to the mean model, for example, high velocities are associated with lower standard deviations. Similar to the results of shear velocity, the standard deviations of density are lower at the horizontal lower density layers and the boundary of the tilted layers have higher standard deviations. Due to the fact that waveforms are more sensitive to density gradients, the bottom constant higher density structure is not well constrained and has higher standard deviations.

To validate the method we compare the results with those obtained using HMC (Figure 3) by Gebraad et al. (2019). Overall the results from HMC are very similar to those obtained using SVGD except for slightly different magnitudes. Since the same solution is found by completely different methods, it is likely to be the true solution to the full waveform Bayesian inference problem. Note that the results from SVGD appears to be smoother than those from HMC, which is probably caused by undersampling and lack of convergence of HMC as noted by Gebraad et al. (2019).

4 Discussion

We first compare the computational cost of the two methods. SVGD involves $600 \times 600 = 360,000$ forward and adjoint simulations, whereas HMC involves approximately 130,000 forward and adjoint simulations. While in this case it thus appears that HMC is more efficient than SVGD, in the above example HMC was conducted using only one chain which had not fully converged (Gebraad et al., 2019). Since in practice multiple chains are usually required to produce an accurate result, HMC may need more computational cost. Also, in contrast to HMC, the simulations in SVGD can easily be parallelized which could make the method more efficient in real

time (Zhang & Curtis, 2019). A Markov chain cannot be easily parallelized due to dependence between successive Markov samples (Neiswanger et al., 2013). In practice HMC often requires deliberate and tedious tuning to achieve an efficient Markov chain (e.g. see discussions in Gebraad et al., 2019) so HMC may incur a significantly higher computational cost than that reported above, whereas SVGD requires less effort to achieve an efficient algorithm by using available optimization techniques, e.g. ADA-GRAD (Duchi et al., 2011; Liu & Wang, 2016). Note that instead of tuning HMC manually some adaptive methods may also be used (Hoffman & Gelman, 2014). To give an overall idea about the computational cost of SVGD, the above example takes about 6 days parallelized using 16 CPU cores.

Although in this study we applied the method to a simple 2D example with only seven sources, the method can be applied easily to larger data sets and to 3D applications by using stochastic optimization (Robbins & Monro, 1951; Kubrusly & Gravier, 1973) and distributed optimization by dividing large data sets into random minibatches. In comparison the same technique cannot easily be applied to MCMC methods since it breaks the reversibility property of Markov chains which is required by most Monte Carlo methods. Clearly further work is required to compare the efficiency of the methods in a range of practical applications.

In this study we used a simple L_2 misfit function which may cause multimodalities in the likelihood function. Although SVGD can approximate arbitrary probability distributions, the absence of local minima may improve the efficiency of convergence and require fewer particles. Therefore in practice other misfit functions that measure similarity of waveforms can be used to reduce multimodalities (Luo & Schuster, 1991; Gee & Jordan, 1992; Fichtner et al., 2008; Brossier et al., 2010; Van Leeuwen & Mulder, 2010; Bozdağ et al., 2011; Métivier et al., 2016). In the example we used a fixed noise level from Gebraad et al. (2019). In practice the noise level may be estimated from the data (Sambridge, 2013; Ray et al., 2016) or estimated in the inversion in a hierarchical way (Malinverno & Briggs, 2004; Bodin et al., 2012; Ranganath et al., 2016; Zhang et al., 2018, 2019).

5 Conclusion

In this study we introduced a new method called variational full-waveform inversion (VFWI), which uses Stein variational gradient descent (SVGD) to solve full-waveform inversion problems and provide accurate uncertainty estimation. We applied the method to a 2D synthetic example and compared the results with those obtained using Hamiltonian Monte Carlo (HMC). The results show that SVGD can produce accurate approximations to the probabilistic results obtained by HMC. Although in the simple 2D example SVGD is less efficient than HMC, the method can easily be parallelized and applied to larger data sets by taking advantage of methods like stochastic optimization and distributed optimization. This can make the method more efficient in practice, allowing it to be applied to larger datasets and 3D applications.

Acknowledgments

The authors thank the Edinburgh Interferometry Project sponsors (Schlumberger, Equinor and Total) for supporting this research. This work has made use of the resources provided by the Edinburgh Compute and Data Facility (ECDF) (<http://www.ecdf.ed.ac.uk/>). The data used in this study and the codes used to generate data are available at Zenodo (<http://doi.org/10.5281/zenodo.3565313>).

References

Bishop, C. M. (2006). *Pattern recognition and machine learning*. springer.

- Biswas, R., & Sen, M. (2017). 2D full-waveform inversion and uncertainty estimation using the reversible jump Hamiltonian Monte Carlo. In *Seg technical program expanded abstracts 2017* (pp. 1280–1285). Society of Exploration Geophysicists.
- Blei, D. M., Kucukelbir, A., & McAuliffe, J. D. (2017). Variational inference: A review for statisticians. *Journal of the American Statistical Association*, 112(518), 859–877.
- Bodin, T., & Sambridge, M. (2009). Seismic tomography with the reversible jump algorithm. *Geophysical Journal International*, 178(3), 1411–1436.
- Bodin, T., Sambridge, M., Tkalčić, H., Arroucau, P., Gallagher, K., & Rawlinson, N. (2012). Transdimensional inversion of receiver functions and surface wave dispersion. *Journal of Geophysical Research: Solid Earth*, 117(B2).
- Bozdag, E., Peter, D., Lefebvre, M., Komatitsch, D., Tromp, J., Hill, J., ... Pugmire, D. (2016). Global adjoint tomography: first-generation model. *Geophysical Journal International*, 207(3), 1739–1766.
- Bozdag, E., Trampert, J., & Tromp, J. (2011). Misfit functions for full waveform inversion based on instantaneous phase and envelope measurements. *Geophysical Journal International*, 185(2), 845–870.
- Brooks, S., Gelman, A., Jones, G., & Meng, X.-L. (2011). *Handbook of Markov chain Monte Carlo*. CRC press.
- Brossier, R., Operto, S., & Virieux, J. (2010). Which data residual norm for robust elastic frequency-domain full waveform inversion? *Geophysics*, 75(3), R37–R46.
- Chen, P., Zhao, L., & Jordan, T. H. (2007). Full 3D tomography for the crustal structure of the Los Angeles region. *Bulletin of the Seismological Society of America*, 97(4), 1094–1120.
- Curtis, A., & Lomax, A. (2001). Prior information, sampling distributions, and the curse of dimensionality. *Geophysics*, 66(2), 372–378.
- Duchi, J., Hazan, E., & Singer, Y. (2011). Adaptive subgradient methods for online learning and stochastic optimization. *Journal of Machine Learning Research*, 12(Jul), 2121–2159.
- Fichtner, A., Bunge, H.-P., & Igel, H. (2006). The adjoint method in seismology: I. theory. *Physics of the Earth and Planetary Interiors*, 157(1-2), 86–104.
- Fichtner, A., Kennett, B. L., Igel, H., & Bunge, H.-P. (2008). Theoretical background for continental-and global-scale full-waveform inversion in the time–frequency domain. *Geophysical Journal International*, 175(2), 665–685.
- Fichtner, A., Kennett, B. L., Igel, H., & Bunge, H.-P. (2009). Full seismic waveform tomography for upper-mantle structure in the Australasian region using adjoint methods. *Geophysical Journal International*, 179(3), 1703–1725.
- Fichtner, A., van Herwaarden, D.-P., Afanasiev, M., Simutè, S., Krischer, L., Çubuk-Sabuncu, Y., ... others (2018). The collaborative seismic earth model: generation 1. *Geophysical research letters*, 45(9), 4007–4016.
- French, S., & Romanowicz, B. (2014). Whole-mantle radially anisotropic shear velocity structure from spectral-element waveform tomography. *Geophysical Journal International*, 199(3), 1303–1327.
- Galetti, E., Curtis, A., Meles, G. A., & Baptie, B. (2015). Uncertainty loops in travel-time tomography from nonlinear wave physics. *Physical review letters*, 114(14), 148501.
- Gauthier, O., Virieux, J., & Tarantola, A. (1986). Two-dimensional nonlinear inversion of seismic waveforms: Numerical results. *Geophysics*, 51(7), 1387–1403.
- Gebraad, L., Boehm, C., & Fichtner, A. (2019). Bayesian elastic full-waveform inversion using Hamiltonian Monte Carlo. *EarthArXiv*, qftn5.
- Gee, L. S., & Jordan, T. H. (1992). Generalized seismological data functionals. *Geophysical Journal International*, 111(2), 363–390.

- Hawkins, R., & Sambridge, M. (2015). Geophysical imaging using trans-dimensional trees. *Geophysical Journal International*, 203(2), 972–1000.
- Hoffman, M. D., & Gelman, A. (2014). The No-U-Turn sampler: adaptively setting path lengths in Hamiltonian Monte Carlo. *Journal of Machine Learning Research*, 15(1), 1593–1623.
- Kubrusly, C., & Gravier, J. (1973). Stochastic approximation algorithms and applications. In *1973 IEEE conference on decision and control including the 12th symposium on adaptive processes* (pp. 763–766).
- Kullback, S., & Leibler, R. A. (1951). On information and sufficiency. *The annals of mathematical statistics*, 22(1), 79–86.
- Lailly, P., & Bednar, J. (1983). The seismic inverse problem as a sequence of before stack migrations. In *Conference on inverse scattering: theory and application* (pp. 206–220).
- Liu, Q., & Tromp, J. (2006). Finite-frequency kernels based on adjoint methods. *Bulletin of the Seismological Society of America*, 96(6), 2383–2397.
- Liu, Q., & Wang, D. (2016). Stein variational gradient descent: A general purpose Bayesian inference algorithm. In *Advances in neural information processing systems* (pp. 2378–2386).
- Luo, Y., & Schuster, G. T. (1991). Wave-equation traveltime inversion. *Geophysics*, 56(5), 645–653.
- Malinverno, A., & Briggs, V. A. (2004). Expanded uncertainty quantification in inverse problems: Hierarchical Byes and empirical Byes. *Geophysics*, 69(4), 1005–1016.
- Métivier, L., Brossier, R., Mérogot, Q., Oudet, E., & Virieux, J. (2016). Measuring the misfit between seismograms using an optimal transport distance: application to full waveform inversion. *Geophysical Journal International*, 205(1), 345–377.
- Nawaz, M., & Curtis, A. (2019). Rapid discriminative variational Bayesian inversion of geophysical data for the spatial distribution of geological properties. *Journal of Geophysical Research: Solid Earth*.
- Nawaz, M. A., & Curtis, A. (2018). Variational Bayesian inversion (VBI) of quasi-localized seismic attributes for the spatial distribution of geological facies. *Geophysical Journal International*, 214(2), 845–875.
- Neiswanger, W., Wang, C., & Xing, E. (2013). Asymptotically exact, embarrassingly parallel MCMC. *arXiv preprint arXiv:1311.4780*.
- Plessix, R.-E. (2006). A review of the adjoint-state method for computing the gradient of a functional with geophysical applications. *Geophysical Journal International*, 167(2), 495–503.
- Pratt, R. G. (1999). Seismic waveform inversion in the frequency domain, part 1: Theory and verification in a physical scale model. *Geophysics*, 64(3), 888–901.
- Pratt, R. G., Shin, C., & Hick, G. (1998). Gauss–Newton and full Newton methods in frequency–space seismic waveform inversion. *Geophysical Journal International*, 133(2), 341–362.
- Prieux, V., Brossier, R., Operto, S., & Virieux, J. (2013). Multiparameter full waveform inversion of multicomponent ocean-bottom-cable data from the Valhall field. part 1: Imaging compressional wave speed, density and attenuation. *Geophysical Journal International*, 194(3), 1640–1664.
- Ranganath, R., Tran, D., & Blei, D. (2016). Hierarchical variational models. In *International conference on machine learning* (pp. 324–333).
- Ray, A., Kaplan, S., Washbourne, J., & Albertin, U. (2017). Low frequency full waveform seismic inversion within a tree based Bayesian framework. *Geophysical Journal International*, 212(1), 522–542.
- Ray, A., Sekar, A., Hoversten, G. M., & Albertin, U. (2016). Frequency domain full waveform elastic inversion of marine seismic data from the Alba field using a Bayesian trans-dimensional algorithm. *Geophysical Journal International*,

- 205(2), 915–937.
- Robbins, H., & Monro, S. (1951). A stochastic approximation method. *The annals of mathematical statistics*, 400–407.
- Sambridge, M. (2013). A parallel tempering algorithm for probabilistic sampling and multimodal optimization. *Geophysical Journal International*, ggt342.
- Shen, X., Ahmed, I., Brenders, A., Dellinger, J., Etgen, J., & Michell, S. (2018). Full-waveform inversion: The next leap forward in subsalt imaging. *The Leading Edge*, 37(1), 67b1–67b6.
- Tape, C., Liu, Q., Maggi, A., & Tromp, J. (2009). Adjoint tomography of the southern California crust. *Science*, 325(5943), 988–992.
- Tape, C., Liu, Q., Maggi, A., & Tromp, J. (2010). Seismic tomography of the southern California crust based on spectral-element and adjoint methods. *Geophysical Journal International*, 180(1), 433–462.
- Tarantola, A. (1984). Inversion of seismic reflection data in the acoustic approximation. *Geophysics*, 49(8), 1259–1266.
- Tarantola, A. (1988). Theoretical background for the inversion of seismic waveforms, including elasticity and attenuation. In *Scattering and attenuations of seismic waves, part i* (pp. 365–399). Springer.
- Tromp, J., Tape, C., & Liu, Q. (2005). Seismic tomography, adjoint methods, time reversal and banana-doughnut kernels. *Geophysical Journal International*, 160(1), 195–216.
- Van Leeuwen, T., & Mulder, W. (2010). A correlation-based misfit criterion for wave-equation traveltime tomography. *Geophysical Journal International*, 182(3), 1383–1394.
- Virieux, J. (1986). P-SV wave propagation in heterogeneous media: Velocity-stress finite-difference method. *Geophysics*, 51(4), 889–901.
- Virieux, J., & Operto, S. (2009). An overview of full-waveform inversion in exploration geophysics. *Geophysics*, 74(6), WCC1–WCC26.
- Warner, M., Ratcliffe, A., Nangoo, T., Morgan, J., Umpleby, A., Shah, N., ... others (2013). Anisotropic 3D full-waveform inversion. *Geophysics*, 78(2), R59–R80.
- Zhang, X., & Curtis, A. (2019). Seismic tomography using variational inference methods. *Journal of Geophysical Research: Solid Earth*. Retrieved from <https://doi.org/10.1029/2019JB018589> doi: 10.1029/2019JB018589
- Zhang, X., Curtis, A., Galetti, E., & de Ridder, S. (2018). 3-D Monte Carlo surface wave tomography. *Geophysical Journal International*, 215(3), 1644–1658.
- Zhang, X., Hansteen, F., Curtis, A., & de Ridder, S. (2019). 1D, 2D and 3D Monte Carlo ambient noise tomography using a dense passive seismic array installed on the North Sea seabed. *Journal of Geophysical Research: Solid Earth*. doi: 10.1029/2019JB018552