

Modelling Small-scale Storage Interventions at the Basin Scale

Robyn HORAN^{1,1}, Pawan S Wable^{2,2}, Veena Srinivasan^{3,3}, Helen Elizabeth Baron^{1,1},
Virginie Keller^{1,1}, Kaushal K K Garg^{4,4}, Nathan Rickards^{1,1}, Mike Simpson^{5,5}, Helen
Houghton-Carr^{1,1}, and Gwyn Rees^{6,6}

¹UK Centre for Ecology & Hydrology

²International Crops Research Institute for the Semi-Arid Tropics

³Ashoka Trust for Research in Ecology and the Environment

⁴ICRISAT

⁵Centre for Ecology and Hydrology

⁶Centre for Ecology & Hydrology, Wallingford

November 30, 2022

Abstract

Recently, there has been renewed interest in the performance and functionality of traditional small-scale storage interventions (check dams, farm bunds and tanks) used across India for the improvement of local water security. The Central Groundwater Board of India is encouraging the construction of such interventions for the alleviation of water scarcity. It is of critical importance to understand the hydrological effect of these interventions at basin scales to maximise their effectiveness. The quantification of small-scale interventions in hydrological modelling is often neglected, especially in large-scale modelling exercises. A bespoke version of the GWAVA model was developed to assess the impact of interventions on the water balance of the Cauvery Basin and two smaller sub-catchments. Model results demonstrate that farm bunds appear to have a negligible effect on the estimated average annual streamflow at the outlets of the two sub-catchments and the basin whereas tanks and check dams have a more significant effect. Interventions generally were found to increase evaporation losses across the catchment. The model adaption used in this study provides a step-change in the conceptualisation and quantification of the consequences of small-scale storage interventions in large- or basin-scale hydrological models.

Modelling Small-scale Storage Interventions in Semi-Arid India at the Basin Scale

Robyn Horan^{1*}, Pawan S. Wable², Veena Srinivasan³, Helen Baron¹, Virginie Keller¹, Kaushal K. Garg², Nathan Rickards¹, Mike Simpson⁴, Helen Houghton-Carr¹ and Gwyn Rees¹

¹ UK Centre for Ecology & Hydrology, Wallingford, Oxfordshire, OX10 8BB, United Kingdom

² International Crops Research Institute for the Semi-Arid Tropics, Hyderabad, India

³ Ashoka Trust for Research in Ecology and the Environment (ATREE), Bangalore, India

⁴ HR Wallingford Ltd, Wallingford, Oxfordshire, OX10 8BA, United Kingdom

* Correspondence: rhoran@ceh.ac.uk

Abstract: Recently, there has been renewed interest in the performance, functionality, and sustainability of traditional small-scale storage interventions (check dams, farm bunds and tanks) used across India for the improvement of local water security. The Central Groundwater Board of India is encouraging the construction of such interventions for the alleviation of water scarcity. It is of critical importance to understand the hydrological effect of these interventions at basin scales to maximise their effectiveness. The quantification of small-scale interventions in hydrological modelling is often neglected, especially in large-scale modelling exercises. A bespoke version of the GWAVA model was developed to assess the impact of interventions on the water balance of the Cauvery Basin and two smaller sub-catchments. Model results demonstrate that farm bunds appear to have a negligible effect on the estimated average annual simulated streamflow at the outlets of the two sub-catchments and the basin whereas tanks and check dams have a more significant effect. Interventions generally were found to increase evaporation losses across the catchment. The model adaption used in this study provides a step-change in the conceptualisation and quantification of the consequences of small-scale storage interventions in large- or basin-scale hydrological models.

Keywords: semi-arid hydrology, small-scale storage, checkdams, tanks, farm bunds, Cauvery, GWAVA

Citation: Lastname, F.; Lastname, F.;

Lastname, F. Title. *Sustainability*

2021, 13, x.

<https://doi.org/10.3390/xxxxx>

Academic Editor: Firstname Last-name

Received: date

Accepted: date

Published: date

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Copyright: © 2021 by the authors. Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license (<http://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Water resources management is becoming increasingly challenging [1] with rapid population growth [2], a changing climate [3] and increasing competition over limited natural resources [4]. For centuries, local communities and municipalities have altered the landscape and built informal structures to increase local water security. In semi-arid regions of the world, people have relied on large-scale infrastructures, such as dams and water transfer schemes, and small-scale infrastructures, such as check dams, farm bunds and tanks, to provide and store water for urban and rural use.

In India, the shortfall in renewable water resources to meet the increasing demand has resulted in aggressive abstraction of the deep groundwater stores and the construction of small surface-water storage structures [5]. The Government of India and State governments have actively encouraged the construction of interventions, such as check dams, farm bunds and tanks, as the primary policy response for alleviating water scarcity [6]. There are now millions of such structures across India [7] and, recently, there has been renewed interest in their effectiveness for improving local water security. It is of critical importance to understand the hydrological effect of these interventions at the

local- and basin-scale to inform sustainable water resource management.

Interventions are generally constructed, within rural and urban settings, to assist in the replenishment and maintenance of local groundwater resources [8]. The most prolific types of interventions in Southern India are check dams, farm bunds and tanks [9]. There is limited knowledge of the hydrological dynamics and performance of interventions [10] and little research has been undertaken to quantify the hydrological effects of interventions at a basin-scale [11]. Some studies have modelled the local impact of interventions on streamflow with different perspectives, including: the impact on the water balance [10]; as a possible use to treat wastewater [12]; and the impact on river flows in headwater catchments [13;14]. Additionally, many studies have focussed on the effects of interventions on sediment transport and local groundwater level [15-23]. The upscaling of small-scale storage interventions is of high interest because it is becoming increasingly popular for water resource management and planning approaches to focus on the basin as an entity [24]. A basin-wide approach is important in semi-arid regions and particularly important in closed and closing basins, where water is a scarce commodity and upstream interventions directly affects downstream water availability [24].

There are concerns regarding the effects and functionality of interventions in Peninsular India. The underlying fissured hard-rock geology of Peninsular India differs from the alluvial deposits Northern India, where most previous studies have been undertaken. Fissured hard-rock has a medium to low permeability and contain aquifers with modest water resources compared to porous, karst and volcanic aquifers. The Cauvery Basin was chosen to be representative of many other basins in Peninsular India. These basins are under pressures of urbanisation, population growth and agriculture intensification. The Cauvery is additionally a contentious river with concern over sharing of water between Karnataka and Tamil Nadu [25]. With water resources in the Cauvery Basin under severe stress and the abundance of small-scale interventions, it is important to understand the effect of interventions on the spatial and temporal hydrological patterns [11]. There are constraints and uncertainty identified in the current modelling of interventions at the basin scale:

- The hydrological functioning of each type of intervention is uncertain.
- Proxy values and parameter adjustments have been utilised in an attempt to quantify the functioning of interventions.
- Data on the location and characteristics of interventions are scarce, and not well documented when available.

The impacts of such changes and interventions on local hydrological processes, such as streamflow, groundwater recharge and evapotranspiration, are poorly understood, and knowledge of how these diverse local changes cumulatively affect water availability at the broader basin-scale is very limited.

Over recent decades, the hydrological functioning of the Cauvery Basin has been altered by drivers including urbanisation, land use change, increased groundwater use, and the proliferation of small-scale surface water storage interventions [26]. The Cauvery Basin is predominantly situated in the federal states of Karnataka and Tamil Nadu, although it crosses into Kerala and Puducherry [27]. The basin is highly water-stressed [28] and the current water use exceeds the renewable water resources within the basin [29]. All the water resources, associated with a “normal” rainfall year, are currently allocated by tribunal [25] and surface water flows only reach the Bay of Bengal in years of strong monsoons [30]. The agricultural activities across the basin require 90% of the total water resources [31]. However, rapidly developing urban and industrial centres are creating increased inter-sectorial and inter-state competition for limited renewable resources [32]. The four states have different water policies, traditional water harvesting techniques, water use prioritisation and value associated with the natural environment. A common

technique throughout the four states is the use of small-scale storage structures to assist in the alleviation of local water stress in non-monsoon periods [33].

Several hydrological modelling exercises have already been carried out in the Cauvery Basin or sub-catchments thereof. Remote sensing methods [34], an ANN model [34] and the SWAT model [35] have been utilised in various sub-catchments of the Cauvery. At a basin scale, SWAT [36–39], SCS-CN [40;41] and VIC-MHM [42] have been used to simulate streamflow. However, none of these previous studies are understood to have considered the inclusion of small-scale interventions.

The Global Water Availability Assessment Tool (GWAVA) is a large-scale gridded water resources model developed by the UK Centre for Ecology & Hydrology. The model is a gridded, semi-distributed, conceptual water resources model [43]. The model incorporates natural processes (soils, land use, lakes, etc) and anthropogenic influences (crops, domestic and industrial demands, reservoir operations, transfers, etc). GWAVA estimates local runoff from each cell using a lumped conceptual probability distribution model (PDM) [44]. The PDM requires a limited set of parameters and the model configuration has three components namely, the probability- distributed soil moisture storage, the surface storage and the groundwater storage. GWAVA utilises a combination of landuse and soil types. There are four land use options (trees, shrubs, grass and bare soil) and seven soil type classifications (ranging from sand to organic). The soil moisture characteristics for each combination are defined by rooting depths, wilting points, field capacities and saturation capacities. The evaporation is estimated using the FAO-56 Hargreaves equation from both the natural vegetation and agricultural crops whilst the effective precipitation is determined using a two-parameter exponential equation as described by [45]. The soil moisture and direct runoff is calculated separately for each land use type and then summed to obtain a total direct runoff for each grid cell. The total direct runoff is then routed through any existing engineering structures within the grid cell using the Muskingum equation and the user defined reservoir outflow or transfer parameters. This is followed by a demand driven routine to account for the anthropogenic stresses on the system. GWAVA accounts for water demands from the domestic (urban and rural), industrial and agricultural sectors. Domestic, industrial and livestock demands are user defined and temporally static but spatially dynamic. Irrigation demand is temporally and spatially dynamic and is estimated using a user-defined crop type and planting month [43].

The use of the GWAVA model in the Cauvery Basin provides the opportunity to investigate the effect of interventions on basin scale hydrology by introducing check dams, farm bunds and tanks into the model structure. To investigate the effect of the interventions on the hydrology of the Cauvery Basin, a bespoke version of the GWAVA model (GWAVA-GW) was developed. In GWAVA-GW, the groundwater module was modified to better capture groundwater levels. The interventions were conceptualised within the model structure using local knowledge, observed data and adaptations of existing reservoir representations. The effect of interventions on the hydrological regime and water balance of the entire Cauvery Basin were studied, as well as a more in-depth analysis of two relatively small sub-catchments contained within the basin.

2. Materials and Methods

The GWAVA model was used to understand the hydrological functioning and impacts of interventions on the water balance of the Cauvery Basin.

2.1 Site Description

The Cauvery River basin is the fourth-largest basin in Peninsular India: it drains an area of 81 155 km² [46]. The Cauvery originates in the Western Ghats at Talakaveri in the Kodagu district of Karnataka and the head waters of the basin form in the Nilgiri and

Anaimalai mountains. The main river channel flows south-easterly through the states of Karnataka and Tamil Nadu to outflow at the Bay of Bengal [47].

The Cauvery Basin is subjected to a large degree of heterogeneity not only in topography and land use but also in climate and economic development [48]. The landscape is semi-arid with the majority of the basin's water coming from the south-western monsoon in the summer months. The basin experiences distinct intra-annual seasons namely, South-Western (SW) monsoon in AMJ, the North-Eastern (NE) monsoon in OND and post-monsoon conditions from JFM. The upper catchment receives rainfall from both the SW and NE monsoons, whereas the lower catchment only receives rainfall from the NE monsoon. The mean annual rainfall varies from 6000 mm in the upper reaches to 300 mm on the eastern boundary [49]. The mean daily temperatures vary between 9°C and 25°C throughout the catchment [26]. The Western Ghats form a rain-shadow along the western coastline decreasing the precipitation gradient during the SW monsoon [50].

The basin is highly anthropogenically influenced. The land use of the basin comprises of 48% agriculture, 22% non-arable land, 19% forest and 9% urban [26]. Natural forests are under great stress due to increasing demand for the forest products and competition over land use. Across the basin, approximately 60% of the total population rely on agriculture [26]. The most common crops grown in the catchment are sugarcane, finger millet, sorghum, groundnut and paddy (rice). Paddy and sugarcane are found predominantly in the canal command areas and delta regions and have high dependence on the Cauvery flow. The urban areas within the basin have expanded by over 35% over the last decade, and, are expected to continue to increase with the expanse of industry [51]. Currently, there are over a hundred impounding reservoirs and approximately twenty major water transfer schemes within the basin (Water Resource Information System- India). There are millions of small-scale interventions throughout the rural and urban regions of the basin.

Model-simulated streamflow, total evaporation, water table level and baseflow were investigated at two sub-catchment outlets and the basin outlet (Figure 1) to determine the effects of the interventions on the availability of simulated streamflow and the catchment water balance. The two sub-catchments were selected based on similar density of interventions but differing underlying geology. The baseflow component (groundwater flowing into the river channel from the aquifer) between the two sub-catchments differed. (Table 1). One sub-catchment is located in Karnataka and the other in Tamil Nadu (Figure 1).

Table 1. The mean annual precipitation (MAP), catchment area (Area), the flow characteristics, the period of no observed streamflow in main channel ($T_{\text{no flow}}$ -days of no streamflow) and underlying geology of two sub-catchments used in this study.

Sub-catchment number	MAP (mm)	Area (km ²)	Rainfall period	Flow characteristics	Period of no streamflow in main channel (days per year)
S1	864	2660	March – January	Non- Perennial	$30 < T_{\text{no flow}} < 60$
S2	867	3120	March- January	Perennial	$0 < T_{\text{no flow}} < 3$

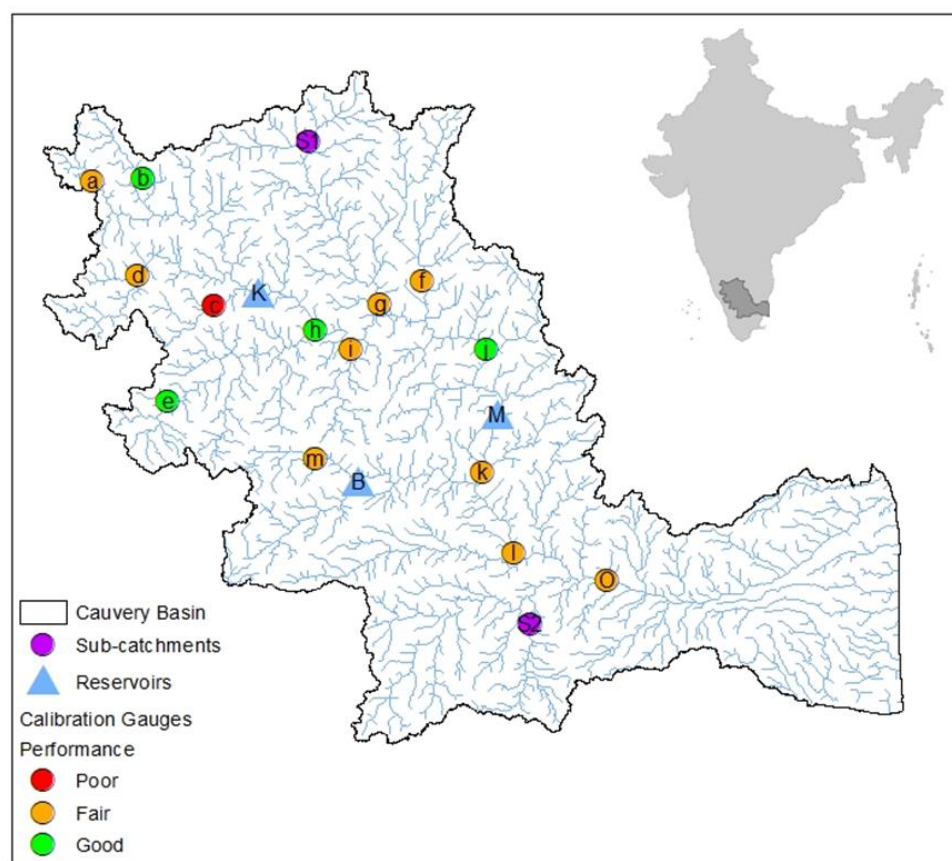


Figure 1. Inset: the location of the Cauvery Catchment within India; main map shows locations of the 14 calibration gauges (a- m and O, Table 1C) with the calibration performance (KGE), the outlets of the two selected sub-catchments (S1 and S2), KRS (K), Bhavangasager (B) and Mettur (M) reservoirs and basin outlet at Musiri (O).

2.2 Model Development

For this study, two major model developments were undertaken. The first the inclusion of a demand driven groundwater routine and secondly the inclusion of small scale interventions.

3.1.1. Groundwater Routine

An improved new groundwater module with additional groundwater processes were added to GWAVA to necessitate the full coupling of the water abstractions. The improved groundwater representation is a modified rendition of the AMBHAS1D model [52]. The groundwater store for each grid cell comprises of a layered aquifer. The number of layers and the depth of each layer is flexible, and the values for specific yield for each layer are user-defined according to the local hydrogeology. The store is recharged from the soil moisture, lakes and reservoirs, leaking water supply infrastructure and artificial recharge structures. The recharge to the aquifer from large water bodies is assumed to be at a constant rate specific to each water body whilst the recharge from water supply infrastructure is determined by the user- defined recharge fraction of the conveyance loss. The percentage conveyance loss from total demand is set by the user and varies between urban and rural water demands to reflect the different infrastructures. The groundwater store is routed as baseflow using a routing coefficient and a user-defined level of groundwater storage below which there is no baseflow. The ground-

water store is converted to an aquifer level (meters below ground level) by dividing by the specific yield. Water can be directly abstracted from the groundwater store down to the user-defined maximum depth of the aquifer. One limitation of this representation is the lack of lateral flow between groundwater stores. It was decided that neglecting lateral flow was an acceptable approximation given the scale of the model.

2.1.2. Conceptualisation of Interventions

The typical characteristics and functioning of each small-scale structure were determined to conceptually represent them in the GWAVA model. Due to the abundance of these small structures throughout the basin, the lack of spatially explicit data and the grid resolution of GWAVA, it was deemed impossible to simulate the effect of each single structure. Instead, each type of intervention was aggregated for every 0.125° cell to form a single composite tank, check dam and farm bund within the cell. For this aggregation to be possible, the surface area of each intervention in a cell was required to estimate the total storage capacity for each type of intervention in that cell. The check dams utilised trapezoidal scaling whilst the tanks and farm bunds utilised cuboidal scaling to determine the storage capacity.

As a result of the structures, the increased open water surface area increases evaporation losses within a grid cell. A constant open water evaporation (OWE) factor was applied to all the interventions. The monthly average OWE was estimated from the evaporation-control-in-reservoirs documentation [53].

- Urban and Rural Tanks

Tanks are small-medium (<34 ha) decentralised means of harvesting runoff, particularly during the monsoon season [54]. These typically are constructed using a shallow dam across a river channel and are unlined [14]. Tanks provide small-scale storage of rainfall and streamflow, control flood waters and increase recharge to groundwater in the immediate area [55]. Rural tank storage is seasonal [56] and in many semi-arid regions, tanks provide the only means to store rainwater and streamflow for irrigation [57]. Urban tanks are fundamental to city drainage systems [14] used for the collection and recycling of wastewater.

For their conceptualisation within GWAVA, both urban and rural tanks were assumed they have an inflow component comprising of daily rainfall, wastewater and streamflow within the cell, with spill contributing to the outflow (Figure 2a). Furthermore, these tanks generally are unlined in order to help groundwater recharge locally. Thus, a leakage rate of 13 mm d^{-1} [58] and 6 mm d^{-1} [59] was added for the rural and urban tanks respectively. The recharge from tanks is relatively low as these structures tend to be highly silted and infiltration is limited through the fine particles lining the bottom. The recharge from rural tanks was higher than from urban tanks under the assumption that tanks in rural areas were constructed more recently and, if they are dredged, they are dredged more regularly. In the absence of detailed tank bathymetry data, it was assumed that all tanks are cuboid in shape with a maximum depth of 3 m deep at full capacity, based on work in Eastern India [60].

- Check Dams

Check dams are small water conservation structures (<0.5 ha) built across a stream using concrete, sandbags or logs [18]. These are designed to reduce the velocity of streamflow through the catchment and to retain the floodwaters (monsoonal rainfall in the case of India) [11]. The process of impounding water at a local scale is thought to increase the groundwater recharge and soil water potential in the adjoining areas [61].

For the model representation of check dams, it was assumed that daily rainfall, local runoff and streamflow of the cell contribute to the inflow (Figure 2b). The leakage from the bottom of the structure is assumed to be 100 mm d^{-1} across all the check dams in the

catchment [62]. The outflows of the check dams comprise of spill. For the purpose of this study and to simplify data collection of thousands of structures, all check dams in the basin are assumed to have the same dimensions and, thus, capacity. The depth is assumed to be 1.5 m [58], the top width of the structure equal to 10 m and the channel slope to be 1%. In the absence of data quantifying the number and spatial repartition of check dams in the Cauvery Basin, a surrogate methodology to estimate these alongside with their storage capacity was established. Based on discussions with stakeholders and cited literature [7; 63; 64], it was assumed that an average check dam in the Cauvery Basin is a 3D trapezoid with a profile that is 10 m in width at a distance of 70 m upstream of the structure.

Thus, the surface area of a check dam was assumed to be fixed at 350 m² for every check dams included in the model. The assumed average surface area was used solely in the determination of the total surface area of check dams within a grid cell: the number of check dams (See Section 2.2.2) within a cell was multiplied by 350 m² to determine the surface area of check dams in each cell. Within the model conceptualisation, the length of the conceptual aggregated check dam was dependent on the surface area. The width and depth remained at 10 m and 1.5 m, but the length was variable.

- Farm Bunds

Farm bunding is a traditional in-situ method for soil and water conservation [65]. Bunds are small barriers at the foot slope of agricultural fields, constructed of soil or stone, to increase the time of concentration of precipitation, where it falls, allowing rainwater to percolate into the soil [66]. Bunds are constructed to retard the movement of overland flow and encourage infiltration within the field [67].

Farm bunds are assumed to be filled from daily rainfall and local runoff within the cell. The saturated hydraulic conductivity of the soils [68] in the basin and the high diurnal temperatures resulted in the water within the farm bunds to infiltrate or evaporate completely within a day. The open water evaporation constant was applied to the surface area of the bunds whilst the infiltration rate differed with regards to soil type. To simulate groundwater recharge from these structures, a rate relative to the saturated hydraulic conductivity of the soil [68] of the area is selected. Once the water held in the bund is equal to full capacity, excess water can flow over the structure and into the stream. It was assumed that all bunds are a maximum of 0.3 m deep [69; 70] (Figure 2c). The surface area of the farm bunds area derived in Section 2.2.2.

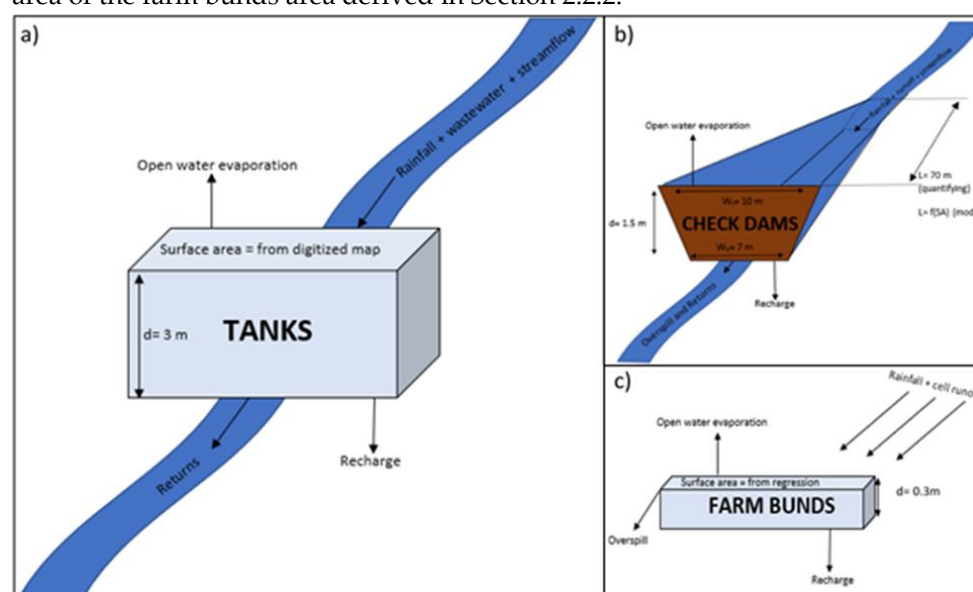


Figure 2. Conceptual diagram of a) tank, b) check dam and c) farm bund adopted in the GWAVA model.

Following the inclusion of the interventions within GWAVA. A sensitivity analysis, in line with that of [62], was performed to assess the effects the number and dimensions of the interventions have on the simulated streamflow. A detailed description of the scenarios can be found in Table A1 in Appendix A. The scenarios presented, for the purpose of this sensitivity analysis, have been run under natural conditions throughout the catchment to isolate the effects of the dimensions and number of interventions on the streamflow.

2.2 Model Application

For this application of the GWAVA model in the Cauvery Basin, a grid cell resolution of 0.125° was chosen based on data availability for the region. The model version including the improved groundwater module and interventions was utilised for this study. The model was set up to include the natural vegetation, agricultural areas, urban areas, rural areas, industrial areas, 54 reservoirs, 27 transfers and a significant number of interventions. Five scenarios were considered to analyse the effects of the interventions within the Cauvery Basin:

- 1 All interventions (Tanks, check dams and farm bunds)
- 2 No interventions
- 3 Only tanks
- 4 Only check dams
- 5 Only farm bunds

3.3 Model Calibration and Validation

GWAVA is calibrated against observed streamflow data using the SIMPLEX auto-calibration routine. This routine uses five parameters for calibration: a surface and groundwater routing parameter, a PDM parameter that describes spatial variation in soil moisture capacity, a multiplier to adjust rooting depths and level of groundwater storage below which there is no baseflow.

GWAVA was calibrated and validated using observed streamflow gauge data from 14 different gauging stations across the basin (Figure 1). The calibration gauges were selected from a set of 28 gauges across the basin based on: completeness of the data, time-period of the data, and size of the subcatchment. The data was deemed sufficient when more than 50% of the data points were identified as 'observed' and not 'calculated' and had at least five consecutive years available from 1980 until 2013. Although, this threshold may appear low, considering a higher proportion of observed to calculated data left an insufficient number of gauges to choose from. Additionally, subcatchments of fewer than four GWAVA grid cells were excluded. The name of each gauging station and the years used for calibration and validation are presented in Table C1 (Appendix C).

The automatic calibration was run across the 14 delineated subcatchments- it must be noted that the parameters in the auto- calibration routine only affect the natural components of the system. Due to the observed streamflow being highly influenced by the reservoir outflows, a manual calibration was carried out for gauges downstream of reservoirs, by re-running the autocalibration routine with a range of different reservoir parameters.

2.4 Data Acquisition

Input data were collected from several sources and extracted from global and regional datasets (Table B1 in Appendix B). Data regarding the number and distribution of interventions in the Cauvery Basin are sparse. Extrapolation and estimation methods described in this section were used to provide the necessary surface area data for input into GWAVA.

The surface area of the rural and urban tanks were estimated by isolating the 'tanks' from the Cauvery Water Bodies dataset (Figure 3). This dataset consists of a shapefile containing all the medium to large waterbodies (rivers, lakes, reservoirs, tanks, wetlands,

etc), in the Cauvery Basin in 2019, derived using remote sensing techniques. The urban tanks were identified as tanks that fell within urban centre boundaries (supplied by the Indian Decadal Census 2011). The tanks outside of these boundaries were assumed to be rural. Check dams and field bunds are too small to be detected by this methodology

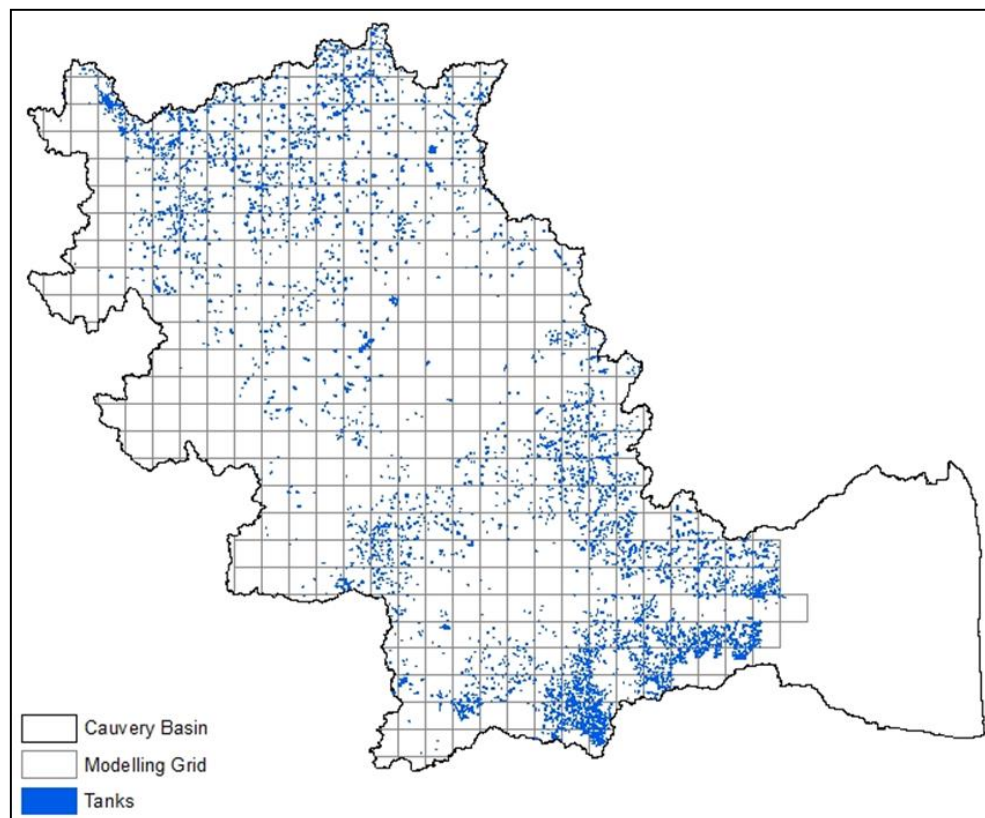


Figure 3. The distribution of tanks [71] within the Cauvery Basin superimposed with the modelling grid of 0.125 degree

Data for the farm bunds and check dams (Table 3) were derived from district-wise Structural Investment Report available for Karnataka from 2006 to 2012 (Figure 4 and Figure 5). For each district in Karnataka, the area covered by farm bunds and the number of check dams was calculated from this financial data by dividing the total expenditure for each type of intervention by the expenditure per hectare of bunding and of a check dam.

In the absence of data for the state of Tamil Nadu, the data from Karnataka were extrapolated. Plausible relationships between the number of check dams and the area of bunding with soil type, rainfall, slope, population, land type, irrigation type and geology in a district were all investigated. None of these yielded any significance. Meaningful relationships, however, were drawn between the number of check dams and the stream density and the area of bunding and the area of rainfed agriculture. These are described below.

Within the districts of Karnataka, a relationship was drawn between the area of farm bunds and the area of rainfed cropland within each district ($r^2 = 0.91$, Figure 4). It was assumed that this relationship holds true into the districts of Tamil Nadu because there are no data or evidence to invalidate this assumption.

The regression (Equation 1) was utilised to estimate the area of farm bunds within each district of Tamil Nadu:

$$A_b = 3.87A_c - 212.44 \quad (1)$$

where A_b is the area covered by bunding (m^2) and A_c is the area of rainfed cropland (m^2)

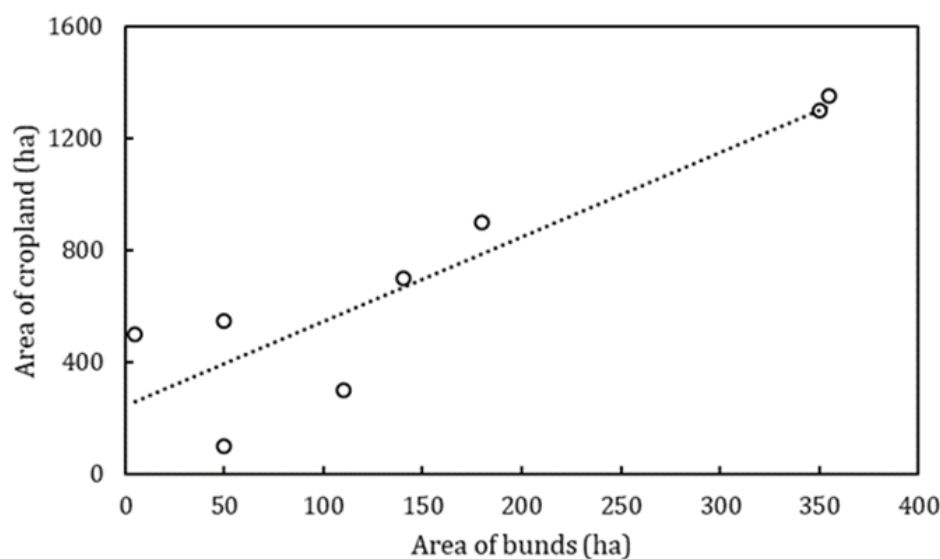


Figure 4. Graphical correlation between area of farm bunds (hectares) and area of cropland (hectares) in each district in Karnataka.

Additionally, a relationship was drawn between the log function of the stream density of each district in Karnataka and the number of check dams ($r^2 = 0.93$, Figure 5). The stream density is characterised by Equation 2 [72].

$$\text{Stream Density (SD)} = \sum \frac{\text{Length of streams of all orders}}{\text{Area of district}} \quad (2)$$

As with the farm bunds, it is assumed that this relationship holds true into the districts of Tamil Nadu.

A regression function (Equation 3) was used to estimate the number of check dams within each district in Tamil Nadu:

$$\text{Log (SD)} = 0.0017N_{cd} - 4.33 \quad (3)$$

where SD is the stream density and N_{cd} is the number of check dams.

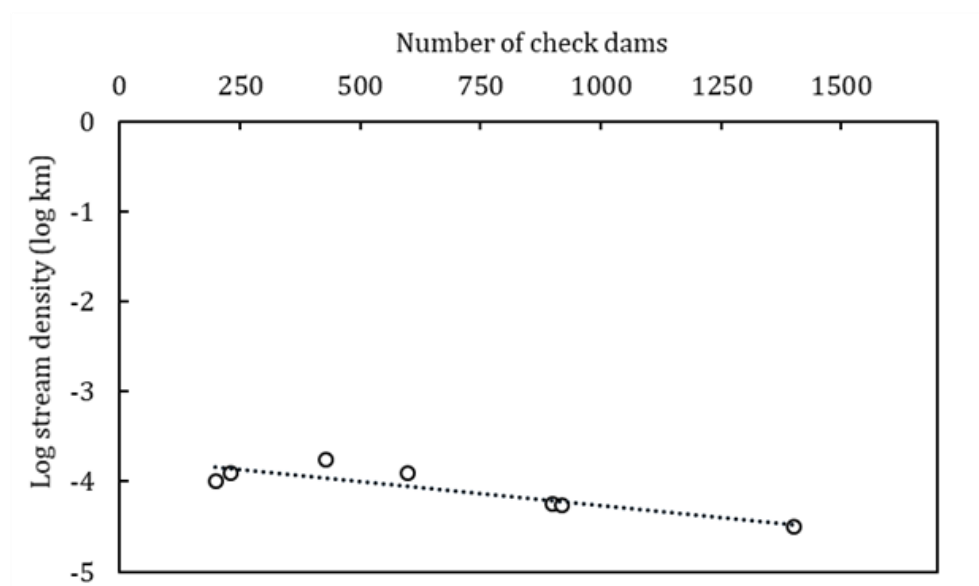


Figure 5. Graphical correlation between number of check dams and stream density in each district in Karnataka

The district-wise data was applied to the modelling grid using a weighing function of the grid-wise stream density (Figure 6a) and crop area respectively (Figure 6b). Across the catchment, the surface area of the interventions within each grid cell ranged between 0.02 and 53 km².

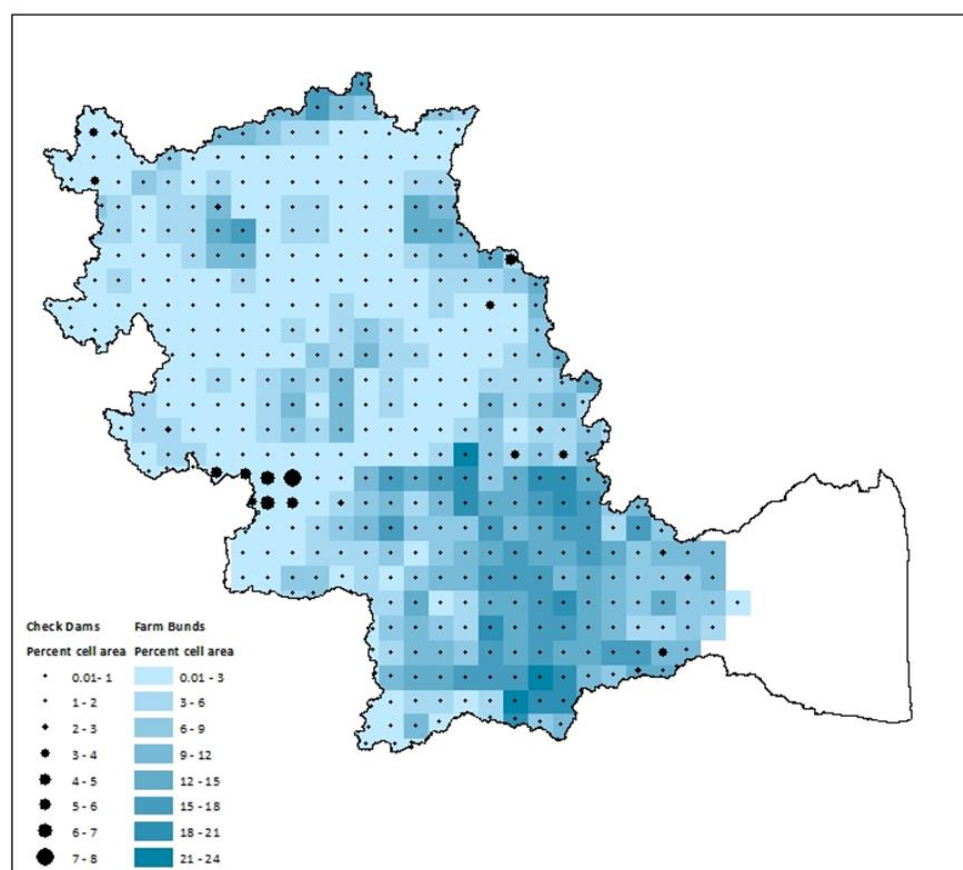


Figure 6. The distribution of check dams and farm bunds within the Cauvery Catchment

3. Results

3.1 Model Performance

The model was automatically calibrated for 14 sub-catchments using daily observed streamflow data downloaded from India Water Resources Information System (India-WRIS, Figure 1). The model performed well in the sub-catchments of the upper reaches but struggled to reliably simulate the flows downstream of the Mettur Dam (Figure 1, Figure 9). Across the basin, the model underestimates the total volume of simulated streamflow. The gridded precipitation data [73] produced by the Indian Meteorological department (IMD) is underestimating the point measured rainfall in the region across the Western Ghats by an excess of 50% (Figure 7). This could be the fundamental explanation for the consistent underestimation of simulated streamflow by GWAVA.

Within the model, the reservoir outflow parameters were adjusted within the full range of possible values and combinations to provide the best possible fit to the daily observed outflow data. The temporal signal of the Mettur Dam outflow is noticeable through all the downstream gauges (Urachikottai and Kodumodi) to the catchment outlet (Musiri). Figure 8a illustrates the ability of the model to better capture the temporal trend of the observed streamflow upstream of Mettur. However, the model was unable to capture the intra- and inter-annual reservoir operations from the Mettur Dam, and thus could not fully represent the timing of the observed streamflow at Urachikottai downstream of the dam (Figure 8b). The GWAVA reservoir outflow routine is determined by the user-set parameters as well as the long-term average inflow. The observed reservoir outflows appear to be sporadic and have very little correlation to the reservoir inflow and thus the reservoir equation within GWAVA does not represent sporadic outflows well.

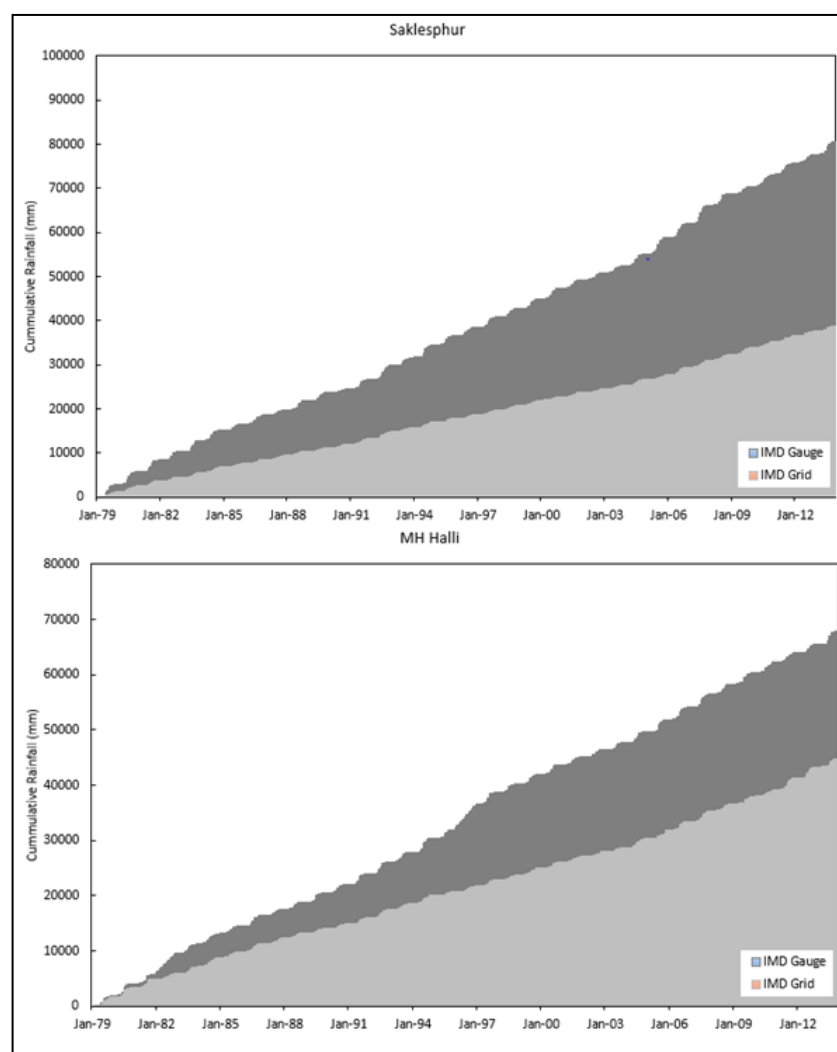


Figure 7. The cumulative IMD gauge and gridded rainfall (mm) across Saklesphur and MH Halli sub catchments (Figure 1) in the headwaters of the Cauvery from 1979 until 2012.

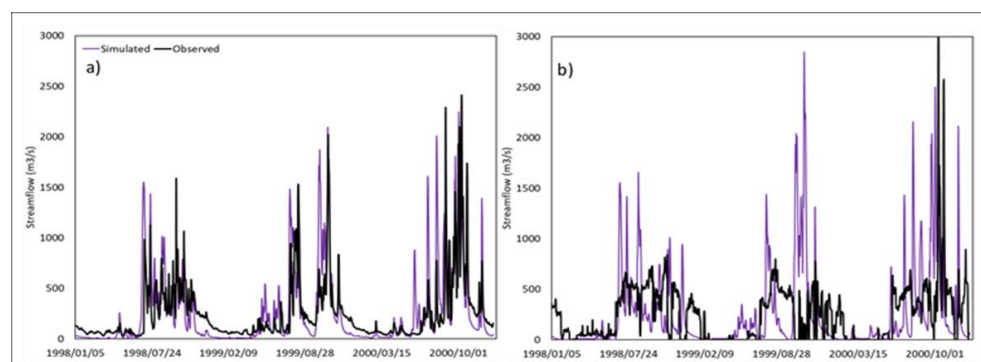


Figure 8. The model simulated and observed streamflow a) at Bilingudulu gauging station (Figure 1- j), upstream of the Mettur Dam and b) Urachikottai gauging station (Figure 1- k), downstream of the Mettur Dam.

The inclusion of the interventions improves the model performance (presented here as KGE). During the calibration and validation, the interventions improved the model performance in 9 and 7 sub-catchments respectively, does not affect the calibration or vali-

dation in 3 and 5 sub-catchments (Table C1 in Appendix C). The lower KGE in the validation period highlight that the better fitting calibration results could have been obtained for the wrong reasons and the model is perhaps not capturing the catchment or reservoir processes correctly. The lack of reliable data pertaining to the Tamil Nadu region and the automatic calibration and conceptual nature of the model could be taking into account processes that are not included in the model structure through the existing model parameterization. Following calibration and validation of the model, streamflow, quick overland flow, sub-surface flow (water flowing to the stream through the soil profile), baseflow (water flowing to the stream from the aquifer), groundwater levels, reservoir storage levels at Mettur Dam and evaporation for five scenarios were simulated.

3.2 Sensitivity Analysis of Interventions within GWAVA

A sensitivity analysis by altering the density and dimension of the conceptualised interventions within GWAVA. The scenario list of the varying densities and dimension utilised in this analysis can be found in Table A1 in Appendix A. The results of the conceptual tank, check dam and farm bund sensitivity analyses are presented in Figure 1A, 1B and 1C respectively in Appendix A.

3.2.1 Tanks

The Q10 flow is decreased with the increase in the density and the depth of the check dams conceptualised in GWAVA. The Q10 is affected by both the increase in depth and density. The mean decreases when the density of tanks is 25m³/ha whilst the mean simulated streamflow is increased when increasing density of check dams from 75- 200 m³/ha. The mean flow is insignificantly affected by the increase in density or depth. The Q90 flow is increased with increasing both the depth and density. As the tanks are deeper than the check dams the evaporative potential from the surface is less and thus the recharge exceeds the evaporation and is able to contribute to the baseflow. The Q10 flows are reduced due to the structural hinderance within the stream channel. When considering the 25m³/ha density the Q10 is reduced by a greater percentage compared to the increase in Q90 thus resulting in a reduction in the mean flow.

3.2.2 Check Dams

The Q10 flow is decreased with the increase in the density and the dimensions of the check dams conceptualised in GWAVA. The Q10 is more sensitive to the increase in dimensions rather than the increase in density. The mean and Q90 simulated streamflow is decrease when the density of tanks is 25m³/ha whilst the mean simulated streamflow is increased when increasing density of check dams from 75- 200 m³/ha. The mean and Q90 flow is not highly sensitive to the change in dimensions of the check dams. When the density of conceptualised check dams is less than 25m³/ha the rate of evaporation is greater (small volume of stationary water storage) than the rate of recharge and the compounded water is evaporated before it is able to recharge and contribute to the baseflow. Once the density of interventions has exceeded 25m³/ha the rate of recharge is greater than the rate of evaporation (the volume to surface area ratio is smaller) and thus more water within the check dam is able to recharge and contribute to the baseflow component.

3.2.3 Farm Bunds

The farm bunds did not have a significant impact on the flows. The changes between the baseline and the four scenarios were less than one percent. Increasing the depth of the farm bunds increased the flows however at the spatially scale of GWAVA this is deemed

insignificant and thus it is concluded that the bunds do not have a significant effect on the flow.

3.3 Effect of Interventions in the Cauvery

In this section, all observations are drawn from model simulations (i.e. simulated streamflow, baseflow, evaporation and groundwater level). The effect of interventions on simulated streamflow across the modelling period (1986-2005) were evaluated using the mean flow (Q^-), the flow exceeded 90% of the time (Q_{90} , quantification of low flows) and the flow exceeded 10% of the time (Q_{10} , representation of high flows). Additionally, the effects of the interventions on the simulated streamflow and evaporation, in a wet (2005), normal year (1998) and dry (2002) year at the catchment outlet of S1 and S2 and the basin outlet, were investigated. These years were chosen by considering the lowest, highest and mean total annual precipitation across the catchments (Table 2)

Table 2. The total annual precipitation and the reduction in flows days with the inclusion of interventions for the selected catchments S1, S2 (Figure 1) and the basin outlet (Figure 1) for wet, dry and normal year.

Sub- catch- ment	Total Annual Precipitation (mm)			Reduction in flows days with the inclusion of interventions		
	Normal year (1998)	Dry year (2002)	Wet year (2005)	Normal year (1998)	Dry year (2002)	Wet year (2005)
S1	507	382	668	14	25	3
S2	1874	656	2085	2	4	3
Basin	1341	685	1413	0	0	0

In the non-perennial catchment (S1, Table 1 and Figure 1), the surface flow is the dominant component of the simulated streamflow (Figure 10). The simulated streamflow (Q_{10} , Q^- and Q_{90}) is reduced with the inclusion of interventions. However, it is the high flows, Q_{10} , that are more significantly reduced (Figure 9). The interventions have a greater impact on the simulated streamflow in S1 than S2. The simulated streamflow is reduced to the largest extent in the normal year (~10%, Figure 9a). The stormflow is intercepted by the intervention and, thus, reduces the simulated streamflow in the wet season (Q_{10} , Figure 9b). The dry season flows (Q_{90} , Figure 9b) are reduced as any subsurface lateral flow (from the soil store) entering the stream is impounded by the intervention. The stormflow component is larger than the subsurface lateral flow and baseflow components in this catchment and, thus, the simulated streamflow is affected to a greater extent in the wet season. The non-perennial streams dry out earlier with the inclusions of interventions (Figure 11 and Table 2). The total evaporation across the sub-catchment is increased with the inclusion of interventions with the greatest increase occurring in the wet year (Figure 9a) as water is present in the interventions for a greater length of time. In this catchment, the water table is increased in the wet season with the inclusion of interventions (Figure 12). Despite the increase in simulated recharge, the water table does not reach a level where the water in the groundwater will contribute to simulated baseflow.

In the perennial catchment (S2, Table 1 and Figure 1), the stormflow is dominant in the wet season but the subsurface flow and baseflow is dominant in the dry season (Figure 10). The simulated streamflow (Q_{10} , Q^- and Q_{90}) is reduced, and the Q_{90} is more significantly reduced with the inclusion of all interventions (Figure 9b). The interventions have a similar effect on simulated streamflow in the dry and wet years (~5%, Figure 9a). In the wet season, the simulated streamflow is reduced due to the in-situ impoundment and the low flows are maintained but reduced in the dry season. In the dry season, simulated streamflow is reduced because the baseflow and any subsurface lateral flow

(from the soil store) entering the stream are impounded by the intervention. The impounded water is subject to both evaporation and recharge. The total evaporation across the sub-catchment is increased with the inclusion of interventions with the greatest increase occurring in the wet and normal years (Figure 9a) as there is water in the interventions for a greater length of time. In this catchment, the groundwater level is minimally affected by the inclusion of the interventions (Figure 12). The water table is above the level at which the groundwater will flow as baseflow. Baseflow will continue to occur but simulated streamflow will be reduced in the dry season as any simulated streamflow produced by the baseflow above the intervention will be impounded.

The response of the S1 and S2 and the outlet exhibit opposite responses. The change in simulated streamflow in S1 and S2 is greater than the change in evaporation whilst the at the basin outlet the change in evaporation is greater than the change in simulated streamflow. At the basin outlet, the simulated streamflow is dominated by the Mettur Dam releases (O, Figure 1). The interventions do not have an effect on the simulated Mettur Dam release flows. The minimal reduction in mean simulated streamflow (~3%) seen at the outlet can be considered as the consequence of the interventions in the tributaries that join the main Cauvery channel downstream of Mettur Dam. However, on analysis of the effect of interventions on the inflow into Mettur Dam, it was found that the interventions reduced the mean simulated streamflow (\bar{Q}) by ~6% and the simulated streamflow in the wet season (Q10) was reduced by ~26%. This demonstrates that the large reservoir has the ability to nullify the impact of the interventions, however, their effect can be seen in the reduction of simulated streamflow entering the reservoir. In this unique case, the effect of the interventions on the Mettur Dam inflow is more representative of the effects of interventions at a basin- scale opposed to those shown at the basin outlet and corresponds more correctly with the increase in total evaporation across the basin with the inclusion of interventions of ~10% (Figure 9a).

Majority of the flow into the Cauvery Basin is contributed by five humid sub-catchments [74] along the western boundary (Figure D1 in Appendix D), however, most of the interventions are constructed in semi- arid regions. The simulated Q90 flow in these humid catchments is affected more by the interventions than in the semi-arid sub-catchments on the eastern boundary (Figure D1 and Figure D2 in Appendix D). Conversely, there is a greater effect of the interventions on the simulated Q10 flow in the semi-arid sub-catchments (Figure D3 in Appendix D). The effect on the Q10 flows is greater in the semi-arid sub-catchments because the monsoonal streamflow is required to fill these structures before they begin to spill. In the humid catchments the interventions do not have a great effect on the Q10 flow as it is likely to be the presence of water within these structures before the monsoon and the intervention immediately spills. Although the percent change in Q10 flows in the semi-arid sub-catchments is higher, the volume of water impeded in these structures may be greater in the humid sub-catchments. The Q90 flow is impacted more severely in the humid catchments as these streams are fed during the dry season through baseflow, whereas in the semi-arid sub- catchments the streams frequently run dry with or without interventions. The implementation of interventions in these sub-catchments, stores water further up in the basin and essentially impedes the downstream flow and restricts water from entering the ocean unused. Although these structures allow available water to be utilised throughout the basin, there are subsequent implications for users and environmental flows downstream. A summary of the total and changes in precipitation, simulated streamflow (with and without interventions), simulated evaporation (with and without interventions) and aquifer levels (with and without interventions) can be found in Table 1D in Appendix D.

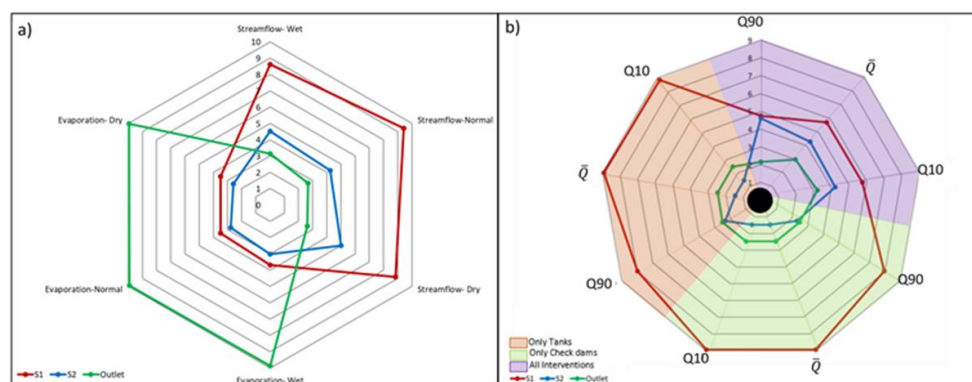


Figure 9. a) The percent reduction in total annual simulated streamflow and increase in total annual simulated evaporation (%) with the inclusion of interventions for S1, S2 and the basin outlet in wet (2005), normal (1998) and dry (2002) years. b) The effect of all the interventions (tanks, check dams and bunds), check dams only and tanks only on high flows (Q10), low flows (Q90) and mean flows (\bar{Q}) flows across S1, S2 and the basin outlet (Table 1, Figure 1).

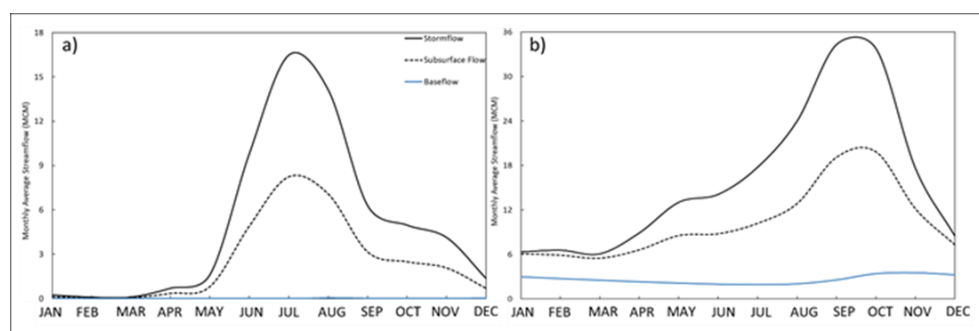


Figure 10. The mean monthly simulated separation hydrograph for a) S1 and b) S2 (Table 1 and Figure 1) from 1986 until 2005 with all interventions included.

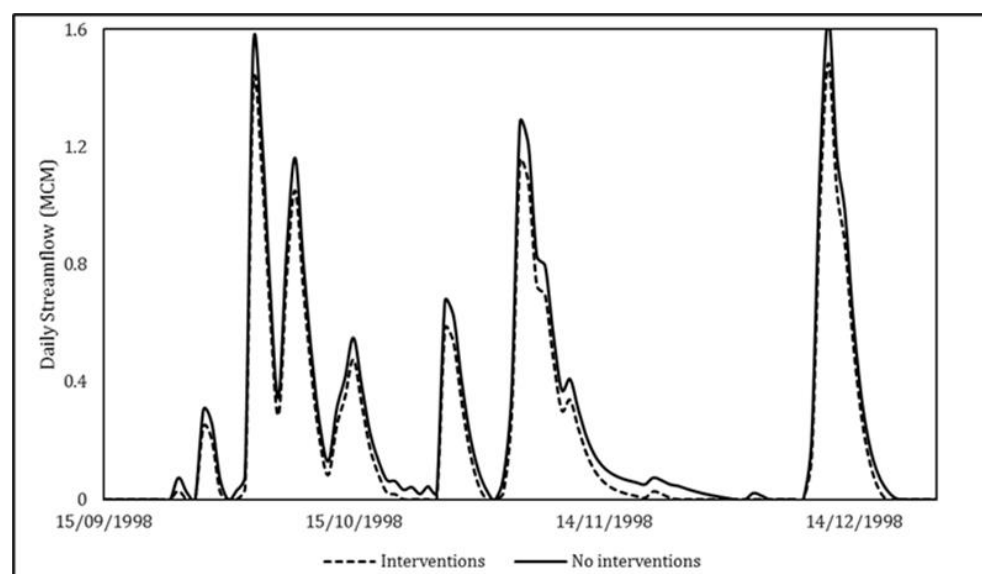


Figure 11. Simulated streamflow in sub-catchment S1 (Table1, Figure 1) with interventions and without interventions through the period of September 1998 until December 1998 (Normal year).

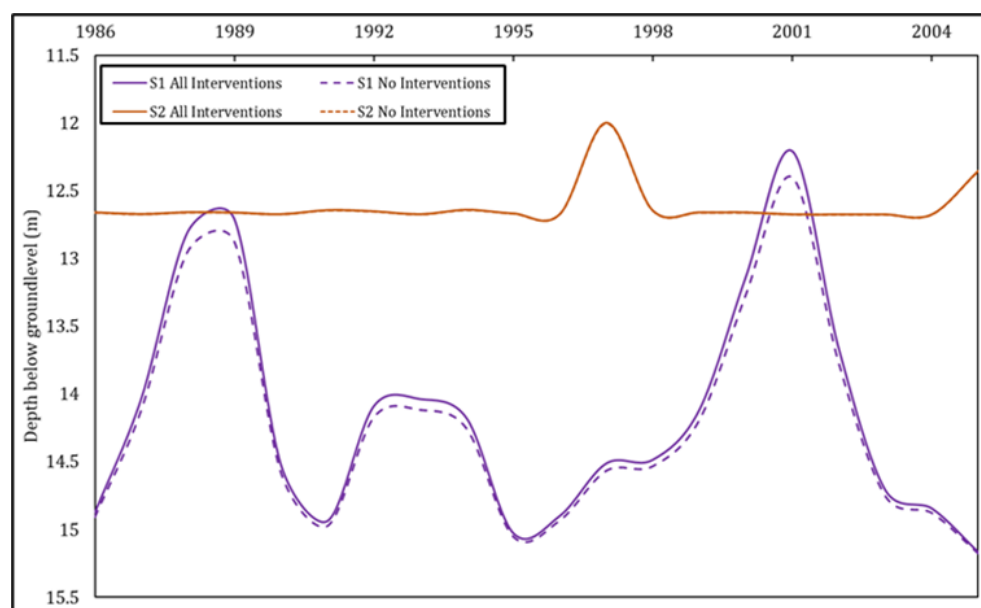


Figure 12. Monthly mean groundwater level below ground surface for S1 and S2 (Table 1 and Figure 1) with and without the inclusion of interventions. There is no change to the aquifer level in S2- this is illustrated by the S2 no interventions line (orange dash) falls directly on S2 all interventions line (orange line).

4. Discussion

The model calibration was acceptable in the upper reaches of the basin, but the model fit was weaker downstream of the Mettur Dam (Figure 1). The inclusion of interventions improves the model performance. It provides a better account of the surface storage within the basin and better estimation of the time of concentration in the sub-catchments without major reservoirs. The farm bunds were found to have little effect on the simulated streamflow, as the high water demands of the rainfed crops cause the infiltrated water from the bunds to be transpired quickly and there to be little difference in the water is converted to baseflow or groundwater recharge with or without the bunds. Assuming the relationship between the area of bunds and the area of rainfed cropland determined for Karnataka holds into Tamil Nadu, the majority of the bunds were located within the lower regions of the basin where there is a greater area of rainfed cropland. It is difficult to distinguish the exact effects of the farm bunds in these regions as the river system is heavily dominated by the Mettur Dam outflows. Conceptually, the model fills the farm bunds followed by the tanks and then the check dams. In the simulations with all the interventions included, the bunds are filled first thus limiting the water available for filling the tanks and check dams. Although individually the bunds have little effect on the simulated streamflow, when cumulatively simulated, with the tanks and check dams, the reduction in water available to fill tanks and check dams reflects in the lower impact on the simulated streamflow. Individually, the tanks and check dams have a similar effect on the simulated streamflow (Figure 9b).

A significant challenge, in large-scale hydrological modelling, is quantifying and managing the uncertainty in climate forcing and evaluation data. Uncertainty can arise from observation gauge density, spatial and temporal interpolation methods and general measurement errors. The Western Ghats region in the NW of the basin is a known area of concern with the IMD precipitation data [73]. Each 0.5-degree grid cell contains numerous terrain and gradient increments and the grid cells fall over the basin boundary. This results in an inaccurate representation of the distribution and total rainfall, as well as the distribution of minimum and maximum temperature, in this region of the basin. This is a significant source of uncertainty as this region acts as the

headwaters for the larger Cauvery Basin. At some gauging points in the basin, there is low confidence in the observed streamflow data. Eye-witness accounts, Srinivasan, et al., (2015) [75] report the drying out of streams in the dry season which is not reflected in the observed data. Additionally, in reality rivers downstream of significant urban areas (Arkavathy downstream of Bangalore and Eluthunimangalam downstream of Coimbatore and Tiruppur) are fed by a perennial stream of sewage. The model does represent return flows from domestic demand, but this may be underestimated compared to the volume of effluent being actually released into these rivers. The analysis of the precipitation and the observed streamflow, used within this study, showed temporal discrepancies. The temporal difference between rainfall events and the hydrograph peak did not show a systematic error or a consistent lag time.

The scale of this study (0.125 degree) required the aggregation of the surface area of each type of intervention in each cell. The simplification in the conceptualisation of the interventions is a cause of uncertainty in this study. The aggregation of the interventions into one composite tank, check dam and farm bund within the cell, skews the surface area to capacity ratio. As intervention data were limited to surface area, if one calculates the intervention capacity from the combined surface area, the capacity is greater than calculating the capacity of each individual interventions and aggregating the capacity. This causes the holding capacity of the conceptual interventions in each cell to be greater than in reality. Subsequently, the larger conceptual intervention will not fill or spill as frequently as many smaller interventions and thus the estimation of the effect on simulated streamflow of all the interventions is uncertain. Additionally, the evaporation could be underestimated as a larger waterbody requires increased energy for evaporation and has a larger lag time (due to heat storage) than a smaller one. This may also lead to the individual smaller interventions being subjected to more evaporative losses than these estimated in the model using the larger conceptual intervention. Conversely, the model structure allocates water to the evaporative component first, and thus, the evaporative processes are favoured in times of water stress. This could additionally be one of the fundamental reasons for the systematic underestimation of simulated streamflow across the basin. The aggregation of the cascading tank systems into one large tank, and, numerous check dams into one large check dam results in the true effects of the cascading system not being represented within the model. Numerous tanks and check dams on a river network can cause the streamflow in the river, and the subsurface and baseflow emerging into the stream to be obstructed by the downstream check dams.

Due to lack of data, the process of quantifying the distribution of the interventions across the basin relies upon many assumptions and, thus, generates significant uncertainty. The accuracy of the Structural Investment Report is unknown and the assumption of a fixed cost per structure/ hectare across Karnataka is unlikely to be accurate. Similarly, assuming that the systems and behavioural patterns (agricultural practices, usage of infrastructure, etc) in the state of Karnataka and Tamil Nadu are identical is also unlikely. However, due to data scarcity and lack of evidence to validate these assumptions, a pragmatic approach was used to allow the inclusion of small-scale interventions in a large-scale hydrological model.

Despite the uncertainty and pilot nature of this study, the trends identified within the Cauvery Basin are in line with the findings from Garg et al. (2012) [13]. Garg et al. (2012) [13] altered a number of parameters within SWAT (surface runoff, water holding capacity, available soil water, groundwater recharge and curve number) to reflect the potential influence of the check dams and farm bunds in the basin and found that the interventions have a slightly greater effect on the simulated streamflow in wetter years. Garg et al. (2012) [13] found that majority of the water balance comprised of the evaporation component and the evaporative losses increased with the inclusion of the interventions. This is in agreement with the GWAVA study presented in this manuscript (Figure 9b). Garg et al. (2012) [13] found that check dams reduced the annual simulated streamflow at the basin outlet of the Kothapally catchment by 9%. This corresponds with

the GWAVA simulation which estimated ~9% reduction in simulated streamflow (Figure 9a) in S1 of similar MAP, soil type and land use. In contrast, the groundwater recharge from the individual interventions was significant in the Garg et al. (2012) [13] study.

There is also agreement between the results of S2 and the work of Xu et al. (2013) [11] in which they concluded that check dams reduce the total runoff in the rainy season (15%, Figure 12). Xu et al. (2013) [11] did not specifically include the characteristics of the interventions but rather attributed the difference between a period of observed and simulated streamflow as the effect of the interventions. The decrease in mean annual streamflow (14%) estimated by Xu et al. (2013) [11] and attributed to the effect of check dams does correlate to the decrease in mean annual streamflow of S2 as a result of check dams (15%, Figure 9). Sub-catchment S2 has a similar MAP and type of vegetation as the catchment studied by Xu et al. (2013) [11].

The decrease in simulated streamflow by GWAVA in S1 and S2 due to tanks was 4% and 5%, respectively. These results differed significantly from those of Van Meter et al. (2015) [10] where the simulated streamflow was found to decrease by 75% from a single cascading tank system in a catchment with an MAP of 850 mm in Tamil Nadu. GWAVA conceptualises the tank systems within a cell into one large hypothetical tank and thus does not capture the cascading characteristics of the tank systems. This, along with a large upscaling effort, could explain the difference in the observed streamflow reduction; alternatively, the tank system investigated by Van Meter et al. (2015) [10] could be atypical.

GWAVA may not capture the sensitivity of hydrological fluxes at a local-scale as a well as a catchment-scale model would. However, yielding similar results to published small-scale studies provides a good starting point for further refinement of the conceptualisation within large-scale hydrological models.

5. Conclusion

The bespoke version of GWAVA provided a valuable tool to investigate the effects of interventions at a sub-catchment and basin scale. It was found that the conceptualised interventions play an important part in the allocation and better representation of simulated surface water within the basin. The results of this study corresponded well with existing literature from small-scale studies. However, at the sub-catchment and basin scale, groundwater levels appear less effected than in the cited literature or indigenous knowledge surrounding the use of interventions for water security at a local scale, suggesting further investigation to explore this is required.

The effect of the conceptualised interventions within GWAVA are dependent on the hydrogeology of the modelled sub-catchment as well as the simulated groundwater level. The influence is greater on the simulated streamflow in the wet years and on estimated evaporation in the dry years. This study incorporated stakeholder and expert knowledge, as well as, published literature information in the conceptualisation of the interventions within the model. New and creative approaches had to be utilised where data gaps existed to model the effects of interventions at the basin scale. The approach outlined in this study can be applied in different model applications in regions where interventions are prominent, if the source code is available for adaption. Although this study had to rely on a pragmatic approach and as a consequence many assumptions were made, it provides a step forward in the conceptualisation, quantification and implication of small-scale storage interventions at the basin scale.

Author Contributions: Conceptualisation, R.H., P.S.W. N.R, M.S and V.D.J.K.; methodology, R.H., H.B., and P.S.W.; software, R.H., H.B. and V.D.J.K.; validation, R.H. and H.B, formal analysis, R.H.; investigation, R.H. and H.B.; data curation, R.H, writing—original draft preparation, R.H.; writing—review and editing: V.D.J.K., H.B., N.R.,G.R, HH-C; supervision, V.D.J.K., H.H.-C. and G.R.;

project administration, G.R., H.H.-C. and V.D.J.K. All authors have read and agreed to the published version of the manuscript.

Funding: The research underlying this paper was carried out under the UPSCAPE project of the Newton-Bhabha program “Sustaining Water Resources for Food, Energy and Ecosystem Services”, funded by the UK Natural Environment Research Council (NERC-UKRI) and the India Ministry of Earth Sciences (MoES), grant number: NE/N016491/1. UK Centre for Ecology and Hydrology (UKCEH) publish with the permission of the Director of UKCEH. The views and opinions expressed in this paper are those of the authors alone.


Data Availability Statement: Datasets utilised for this research are available in these in-text data citation references: Pai et al. (2014)[73], Central Water Commission (1987)[53], Wable, et al. (2019)[62], NASA JPL (2013)[76], Fischer et al. (2008)[77], Roy et al. (2008)[78] and Robinson et al. (2014)[79]. The data presented in this study are available on request from the corresponding author.

Conflicts of Interest: The authors declare no conflict of interest.

Appendix A

Table A1: Description of scenarios utilised in the sensitivity

Scenario	Depth (m)	Width (m)	Intervention density (m ³ /ha)	Scenario	Depth (m)	Width (m)	Intervention density (m ³ /ha)
Tanks							
T1	3	n/a	25	T7	5	n/a	125
T2	3	n/a	75	T8	5	n/a	200
T3	3	n/a	125	T9	10	n/a	25
T4	3	n/a	200	T10	10	n/a	75
T5	5	n/a	25	T11	10	n/a	125
T6	5	n/a	75	T12	10	n/a	200
Check Dams							
C1	1	7	25	C7	1.5	10	125
C2	1	7	75	C8	1.5	10	200
C3	1	7	125	C9	2	15	25
C4	1	7	200	C10	2	15	75
C5	1.5	10	25	C11	2	15	125
C6	1.5	10	75	C12	2	14	200
Farm Bunds							
B1	0.03	n/a	25	B5	0.06	n/a	25
B2	0.03	n/a	75	B6	0.06	n/a	75
B3	0.03	n/a	125	B7	0.06	n/a	125
B4	0.03	n/a	200	B8	0.06	n/a	200

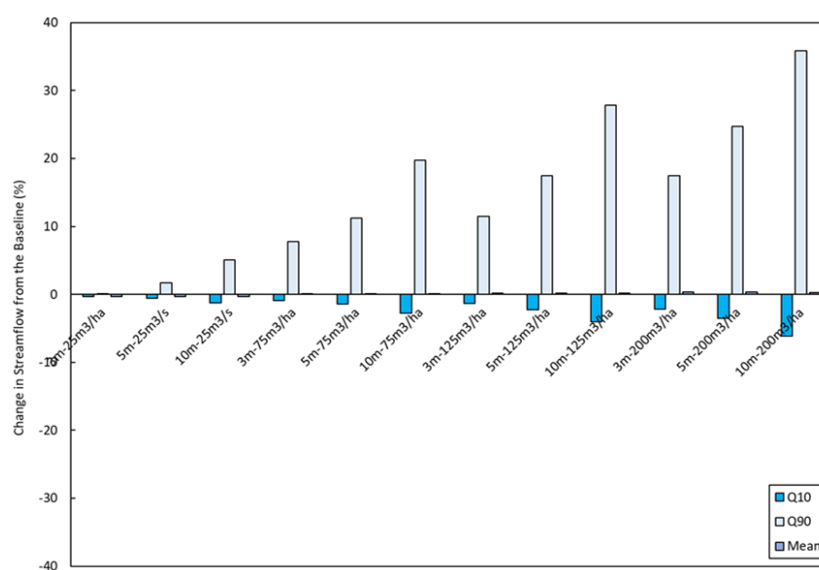**Figure A1** The change in the Q10, Q90 and mean simulated streamflow from the baseline with the inclusion of tanks of various density and depths (Table A1)

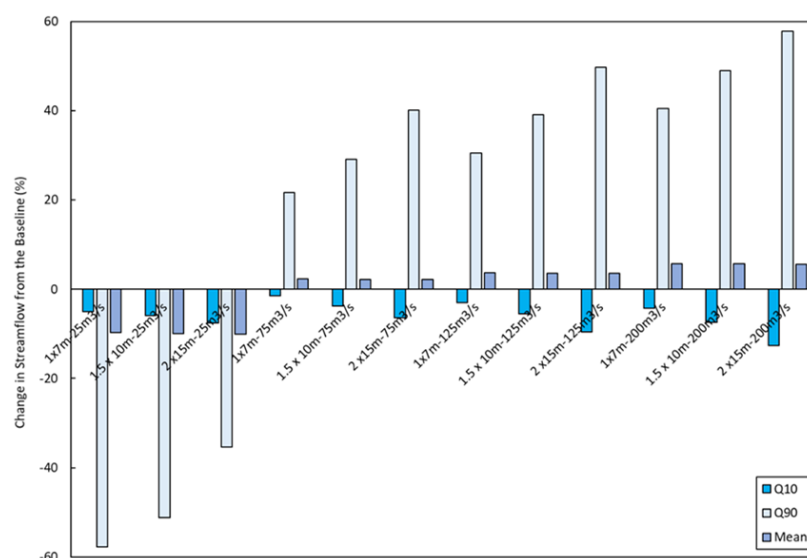


Figure A2 The change in the Q10, Q90 and mean simulated streamflow from the baseline with the inclusion of check dams of various density and dimensions (Table A1).

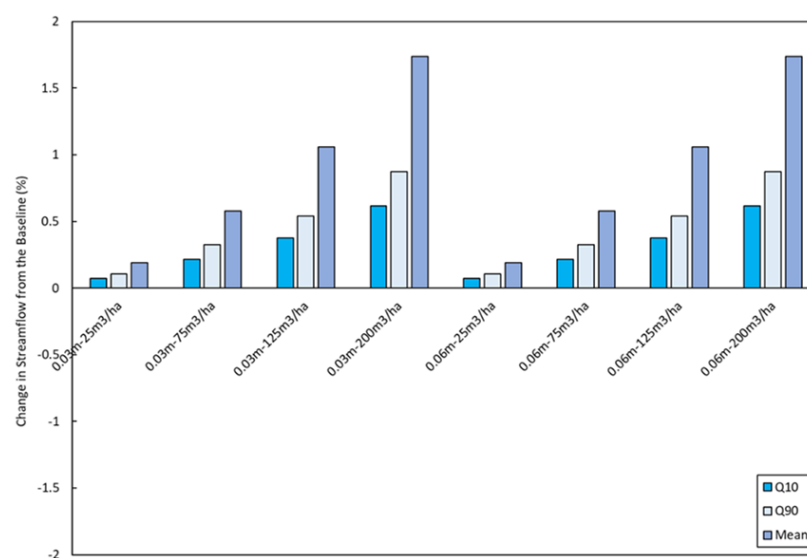


Figure A3 The change in the Q10, Q90 and mean simulated streamflow from the baseline with the inclusion of farm bundles of various density and dimensions (Table A1).



Appendix B

Table 1B: Input data utilised in the GWAVA model setup

Input Data	Spatial Resolution	Temporal Resolution	Time Period	Source
Precipitation	0.25 degree	Daily	1951-2017	Indian Meteorological Department [73]
Maximum Temperature	0.25 degree	Daily	1951-2016	Indian Meteorological Department [73]
Minimum Temperature	0.25 degree	Daily	1951-2016	Indian Meteorological Department [73]
Open Water Evaporation	India	Monthly	1959-1968	Central Water Commission, Basin Planning & Management Organisation[53]
Streamflow gauged data	Cauvery Basin	Daily	1971-2014	India-WRIS
Reservoir inflow and outflow data	Cauvery Basin	Monthly	1974-2017	India-WRIS
Water transfers	Cauvery Basin			Ashoka Trust for Research in Ecology and the Environment (ATREE)
Tanks	Cauvery Basin		2019	Waterbodies dataset [71]
Check dams	Karnataka (District)		2006-2012	Structural Investment Report, Watershed Development Department
Farm bunds	Karnataka (District)		2006-2012	Structural Investment Report, Watershed Development Department
Elevation	0.003 degree		2000	NASA Shuttle Radar Mission Global 1 arc second V003 [76]
Soil type	0.008 degree		1971-1981	Harmonized World Soil Database v1.2 [77]
Land Cover Land Use	0.001 degree		2005	Decadal land use and land cover across India 2005 [78]

Crops	Cauvery Basin (Taluk*)	2000	National Remote Sensing Centre (NRSC)
Total Population	Cauvery Basin (Village)	2011	Indian Decadal Census
Rural Population	Cauvery Basin (Village)	2011	Indian Decadal Census
Livestock	0.05 degree	2005	CGIR Livestock of the World v2 [79]

*Taluk-a subdivision of a district consisting of a group of several villages organized for revenue purposes

Appendix C

Table 1C: Calibration and Validation monthly Kling-Gupta Efficiency (KGE) values when GWAVA was calibrated with and without the inclusions of interventions. The green shading represents a better performance, the grey shading represents the same performance, and the orange shading represents a poorer performance with the inclusion of interventions.

Sub- catchment		Calibration			Validation		
		KGE without interventions	KGE with interventions	Period	KGE without interventions	KGE with interventions	Period
a	Saklesphur	0.53	0.66	2006-2010	0.37	0.38	2010-2013
b	Thimmanahali	0.71	0.71	2005-2009	0.72	0.68	2010-2013
c	KMVadi	0.25	0.24	1991-2000	0.16	0.16	2001-2011
d	Kudige	0.48	0.59	1990-2000	0.55	0.59	2012-2014
e	Munthankera	0.73	0.82	1990-2000	0.66	0.70	2001-2011
f	Tbekuppe	0.41	0.32	1980-1990	-1.28	-1.27	2001-2003
g	TKHali	0.52	0.71	1990-2000	0.69	0.67	2001-2008
h	T Narasupiar	0.60	0.68	1988-1998	0.25	0.30	1999-2002
i	Kollegal	0.56	0.58	2008-2011	0.50	0.54	2012-2013
j	Bilingudulu	0.74	0.74	1990-2000	0.61	0.60	2001-2011
k	Urachikottai	0.34	0.74	1990-2000	0.49	0.51	2001-2008
l	Kodumodi	0.25	0.62	1990-2000	0.24	0.30	2005-2010
o	Musiri	0.33	0.65	1990-2000	0.43	0.44	2006-2010
m	Thengumarahada	0.57	0.50	1990-2000	0.39	0.44	2001-2008

Appendix D

769

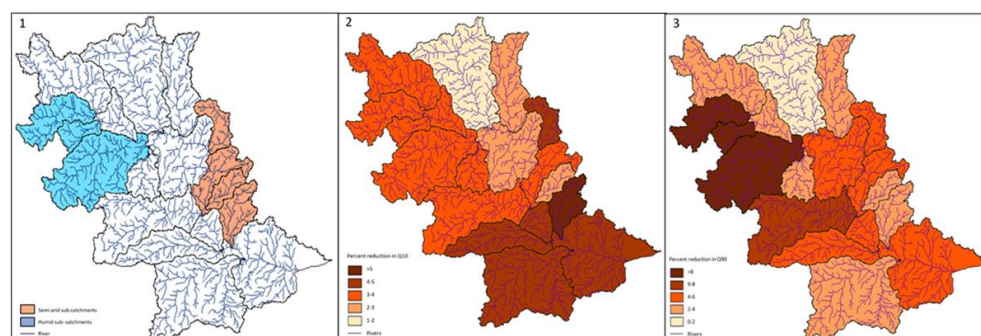


Figure 1D 1) The sub-catchments identified as humid and semi-arid, 2) the percentage reduction on Q10 flow and 3) the percentage reduction on Q90 flow across the Cauvery Basin.

Table 1D The total annual (for 1998, 2002 and 2005) precipitation (P), simulated streamflow (Q), simulated total evaporation (ET) and average annual aquifer level (Aq) below ground level with and without interventions. The change (Δ) with the inclusion of interventions is presented as a percentage change.

	Year	P (mm)	Q-int (mm)	Q- no int (mm)	ΔQ (%)	ET- int (mm)	ET- no int (mm)	ΔET (%)	Aq- int (m)	Aq- no int (m)	ΔAq (m)
S1	1998	507	118	130	-9.4	624	602	3.4	14.02	14.42	2.7
	2002	382	44	48	-8.8	436	421	3.4	12.46	12.86	3.1
	2005	668	68	75	-8.6	735	708	3.6	14.52	14.92	2.6
S2	1998	1874	977	1020	-4.2	1527	1485	2.7	12.61	12.61	0
	2002	656	669	704	-5	489	477	2.5	12.64	12.64	0
	2005	2085	802	840	-4.5	1301	1262	3	12.32	12.32	0
Outlet	1998	1341	325	334	-2.6	1030	928	9.9	8.97	9	0.2
	2002	685	130	134	-2.6	521	469	9.9	8.97	8.99	0.3
	2005	1413	432	446	-3.1	1067	962	9.8	8.95	8.96	0.1

770

771

772

773

774

775

776

777

778

779

780

781

References

1. Cleaver F. Development through bricolage. rethinking institutions for natural resource management. Routledge, 2017. 782
2. Loucks D.P. Managing water as a critical component of a changing world. *Water Resour. Manag.* 2017. 10 . 783
Vol. 31. pp. 2905-2916. 784
3. Wang, X.J., Zhang, J.Y., Shahid, S., Guan, E.H., Wu, Y.X., Gao, J. and He, R.M. Adaptation to climate change impacts on water demand. *Mitigation and Adaptation Strategies for Global Change.* 2016. Vol. 21. pp. 81-99. 785
4. Smith Z.A. Competition for Water Resources. *Issues in Federalism. Florida State University Journal of Land Use and Environmental Law.* 2018. 2 . Vol. 2. p. 3. 786
5. Ramaswamy S. The groundwater recharge movement in India. in *The agricultural groundwater revolution. opportunities and threats to development.* Wallingford . CABI, 2007. 787
6. Goyal MR and Sivanappan RK *Engineering Practices for Agricultural Production and Water Conservation. An interdisciplinary Approach.* Oakville . Apple Academic Press, 2017. 788
7. Agoramoorthy G and Hsu M J Small size, big potential. check dams for sustainable development. *Environment. Science and Policy for Sustainable Development.* 2008. 4 . Vol. 50. pp. 22-35. 789
8. Renganayaki S P and Elango L A review on managed aquifer recharge by check dams. a case study near Chennai, India. *International Reservoir Engineering Technology.* 2013. 4 . Vol. 2. pp. 416-423. 790
9. Shah T India's master plan for groundwater recharge. an assessment and some suggestions for revision. *Economic and political weekly,* 2008. 791
10. Van Meter, K.J., Basu, N.B., McLaughlin, D.L. and Steiff, M. The socio-ecohydrology of rainwater harvesting in India. Understanding water storage and release dynamics at tank and catchment scales. *Hydrol. Earth Syst. Sci. Diss.* 2015. 11 . Vol. 12. pp. 12121- 12165. 792
11. Xu, Y.D., Fu, B.J. and He, C.S. Assessing the hydrological effect of the check dams in the Loess Plateau, China, by model simulations. *Hydrol. Earth Syst. Sci.* 2013. 6 . Vol. 17. p. 2185. 793
12. Vidya, V.K., Putty, Y., Mysooru, R. and Manjunath, K.C. Urban Tanks for Facilitating Reuse of Municipal Sewage—A Case Study in Mysuru, Karnataka. *Aquatic Procedia.* 2015. Vol. 4. pp. 1508 – 1513. 794
13. Garg, K.K., Karlberg, L., Barron, J., Wani, S.P. and Rockstrom, J. Assessing impacts of agricultural water interventions in the Kothapally watershed, Southern India. *Hydrol. Process.* 2012. 3 . Vol. 26. pp. 387-404. 795
14. Penny, G., Srinivasan, V., Dronova, I., Lele, S. and Thompson, S. Spatial characterization of long-term hydrological change in the Arkavathy watershed adjacent to Bangalore, India. *Hydrol. Earth Syst. Sci.* 2018. 1 . Vol. 22. 796
15. Doolittle W E The use of check dams for protecting downstream agricultural lands in the prehistoric Southwest. a contextual analysis. *Journal of Anthropological Research.* 1985. 3 . Vol. 41. pp. 279-305. 797
16. Armanini, A., Dellagiacoma, F. and Ferrari, L. From the check dam to the development of functional check dams. *Fluvial hydraulics of mountain regions.* Berlin, Heidelberg . Springer, 1991. 798
17. Boix-Fayos, C., Barberá, G.G., López-Bermúdez, F. and Castillo, V.M. Effects of check dams, reforestation and land-use changes on river channel morphology. Case study of the Rogativa catchment (Murcia, Spain). *Geomorphology.* 2007. Vol. 91. pp. 103-123. 799
18. Boix - Fayos, C., de Vente, J., Martínez - Mena, M., Barberó, G.G. and Castillo, V. The impact of land use change and check - dams on catchment sediment yield. *Hydrol. Process.. An International Journal.* 2008. 25 . Vol. 22. pp. 4922-4935. 800

19. Mishra, A., Froebrich, J. and Gassman, P.W. Evaluation of the SWAT model for assessing sediment control structures in a small watershed in India. *Transactions of the ASABE*. 2007. 2 . Vol. 50. pp. 469-477.
20. Polyakov, V.O., Nichols, M.H., McClaran, M.P. and Nearing, M.A. Effect of check dams on runoff, sediment yield, and retention on small semiarid watersheds. *Journal of soil and water conservation*. 2014. 5 . Vol. 69. pp. 414-421.
21. Dashora Y [et al.] A simple method using farmers' measurements applied to estimate check dam recharge in Rajasthan, India. *Sustainable Water Resour. Manag.* 2018.
22. Wei, Y., He, Z., Li, Y., Jiao, J., Zhao, G. and Mu, X. Sediment yield deduction from check-dams deposition in the weathered sandstone watershed on the North Loess Plateau, China. *Land Degradation & Development*. 2017. Vol. 28. pp. 217-231.
23. Díaz-Gutiérrez, V., Mongil-Manso, J., Navarro-Hevia, J. and Ramos-Díez, I. Check dams and sediment control. final results of a case study in the upper Corneja River (Central Spain). *Journal of soils and sediments*. 2019. Vol. 19. pp. 451-466.
24. Krois J and Schulte A Modeling the hydrological response of soil and water conservation measures in the Ronquillo watershed in the Northern Andes of Peru. 6th International conference on water resources and environment research , 2013.
25. Salman S M Inter-states water disputes in India. an analysis of the settlement process. *Water Policy*. 2002. 3 . Vol. 4. pp. 223-237.
26. Sreelash, K., Mathew, M.M., Nisha, N., Arulbalaji, P., Bindu, A.G. and Sharma, R.K. Changes in the Hydrological Characteristics of Cauvery River draining the eastern side of southern Western Ghats, India. *International Journal of River Basin Management*. 2020. pp. 1-14.
27. Sharma, A., Hipel, K.W. and Schweizer, V. Strategic Insights into the Cauvery River Dispute in India. *Sustainability*. 2020. 4 . Vol. 12. p. 1286.
28. Hoekstra, A.Y., Mekonnen, M.M., Chapagain, A.K., Mathews, R.E. and Richter, B.D. Global monthly water scarcity. blue water footprints versus blue water availability. *PloS one*. 2012. 2 . Vol. 7.
29. Moore R J The Probability- Distributed Principal and Runoff Production at Point and Basin Scales. *Hydrol. Sci. J.* 1985. 2 . Vol. 30. pp. 273-297.
30. Falkenmark, M. and Molden, D. Wake up to realities of river basin closure. *International journal of water resources development*. 2008. 2 . Vol. 24. pp. 201-215.
31. Bhawe, A.G., Conway, D., Dessai, S. and Stainforth, D.A. Water resource planning under future climate and socioeconomic uncertainty in the Cauvery River Basin in Karnataka, India. *Water. Res. Res.* 2018. 2 . Vol. 52. pp. 708-728.
32. Jamwal, P., Thomas, B.K., Lele, S. and Srinivasan, V. Addressing water stress through wastewater reuse. Complexities and challenges in Bangalore, India. In *Proceedings of the Resilient Cities 2014 congress*. 2014.
33. Kumar M D [et al.] Rainwater harvesting in India. some critical issues for basin planning and research. *Land Use and Water Resour. Res.* 2006. Vol. 6. pp. 1-17.
34. Patel, S.S. and Ramachandran, P. A comparison of machine learning techniques for modeling river flow time series. the case of upper Cauvery river basin. *Water. Res. Man.* 2015. 2 . Vol. 29. pp. 589-602.
35. Kumar, R and Nandagiri, L. Application and Test of the SWAT Model in the Upper Cauvery River Basin, Karnataka, India. In *Forth International Engineering Symposium Proceedings*. 2015.
36. Gosain A K, Rao S and Basuray D Climate change impact assessment on hydrology of Indian river basins. *Curr. Sci.* 2006. pp. 346-353.

37. Singh, A. and Gosain, A.K. Climate-change impact assessment using GIS-based hydrological modelling. *Water international*. 2011. 3 . Vol. 36. pp. 386-397. 865
866
38. Bhuvaneswari, K., Geethalakshmi, V., Lakshmanan, A., Srinivasan, R. and Sekhar, N.U. The impact of El Nino/Southern oscillation on hydrology and rice productivity in the Cauvery Basin, India. application of the soil and water assessment tool. *Weather and Climate Extremes*. 2013. Vol. 2. pp. 39-47. 867
868
869
39. Mandal, U., Sahoo, S., Munusamy, SB. Delineation of groundwater potential zones of coastal groundwater basin using multi-criteria decision making technique. *Water Resour. Manag.* 2016. Vol. 30. pp. 4293–4310. 870
871
40. Geetha, K., Mishra, S.K., Eldho, T.I., Rastogi, A.K. and Pandey, R.P. SCS-CN-based continuous simulation model for hydrologic forecasting. *Water Resour. Manag.* 2008. 2 . Vol. 22. pp. 165-190. 872
873
41. Parvez, M.B. and Inayathulla, M. Estimation of Surface Runoff by Soil Conservation Service Curve Number Model for Upper Cauvery Karnataka. *International Journal of Science Research in Multidisciplinary Studies*. 2019. Vol. 5. p. 11. 874
875
876
42. Raje, D., Priya, P. and Krishnan, R. Macroscale hydrological modelling approach for study of large scale hydrologic impacts under climate change in Indian river basins. *Hydrol. Process.* 2014. 4 . Vol. 28. pp. 1874-1889. 877
878
879
43. Meigh, J.R., McKenzie, A.A., Sene, K.J. A grid-based approach to water scarcity estimates for eastern and southern Africa. *Water Res. Manag.* 1999. Vol. 13. pp. 85–115. 880
881
44. Moore S.M. *Subnational Hydropolitics. Conflict, Cooperation, and Institution-building in Shared River Basins*. Oxford . Oxford University Press, 2018. 882
883
45. Calder I R *Evaporation in the Uplands*. Chichester . Wiley, 1990. 884
46. Jain, S.K., Agarwal, P.K. and Singh, V.P. *Hydrology and water resources of India*. New Delhi . Springer Science & Business Media, 2007. 57. 885
886
47. Chidambaram, S., Ramanathan, A.L., Thilagavathi, R. and Ganesh, N. *Cauvery River. The Indian Rivers*. Singapore . Springer, 2018. 887
888
48. Madhusoodhanan C G, Sreeja K G and Eldho T I Climate change impact assessments of water resources of India under extensive human interventions. *Ambio*. 2016. 6 . Vol. 45. pp. 725-741. 889
890
49. Meunier, J.D., Riotte, J., Braun, J.J., Sekhar, M., Chalié, F., Barboni, D. and Saccone, L. Controls of DSi in streams and reservoirs along the Kaveri River, South India. *Science of the Total Environment*. 2015. Vol. 502. pp. 103-113. 891
892
893
50. Gunnell Y Relief and climate in South Asia. the influence of the Western Ghats on the current climate pattern of peninsular India. *International journal of climatology. a journal of the Royal Meteorological Society*. 1997. 11 . Vol. 17. pp. 1169-1182. 894
895
896
51. Lannerstad M Planned and unplanned water use in a closed South Indian Basin. *Int. J. Water. Res. Develop.* 2008. 2 . Vol. 24. pp. 289-304. 897
898
52. Subash Y [et al.] *A framework for assessment of climate change impacts on. Sustainable Water Resources*. ASCE , 2016. 899
900
53. Central Water Commission *Evaporation control in reservoirs Report 6 no 1087*. New Delhi . CSMRS, 1987. 901
54. Gunnell, Y. and Krishnamurthy, A. Past and present status of runoff harvesting systems in dryland peninsular India. A critical review. *AMBIO. A Journal of the Human Environment*. 2003. 4 . Vol. 32. pp. 320-324. 902
903
904
55. Bhattacharya A.K. *Artificial ground water recharge with a special reference to India. Artificial Ground Water Recharge*. 2010. 2 . Vol. 4. pp. 214-21. 905
906

56. Gowda, K., Sridhara, M.V. and Chandrashekar, M.N. Planning Strategies for Municipal Solid Waste Management in the City of Hassan, Karnataka. *International Journal of Innovative Technology and Research*. 2014. 3 . Vol. 2. pp. 948-958.
57. Anbumozhi, V., Matsumoto, K. and Yamaji, E. Towards improved performance of irrigation tanks in semi-arid regions of India. *modernization opportunities and challenges. Irrigation and Drainage Systems*. 2001. 4 . Vol. 15. pp. 293-309.
58. Dashora Y [et al.] Hydrologic and cost benefit analysis at local scale of streambed recharge structures in Rajasthan (India) and their value for securing irrigation supply. *Hydrogeology Journal*. 2019. 6 . Vol. 27. pp. 1889- 1909.
59. Lal, R. and Stewart, B.A. *Soil water and agronomic productivity*. Florida . CRC Press, 2012.
60. Pant, N. and Verma, R.K. *Tanks in Eastern India. a study in exploration*. Colombo . IWMI, 2010.
61. Adhikari, R.N., Singh, A.K., Math, S.K.N., Sharma, K.K. and Reddy, K.K. Study on the effect of groundwater recharge through water harvesting structures in semi-arid red soil region of south India. *Indian Journal of Soil Conservation*. 2015. 3 . Vol. 43. pp. 266-270.
62. Wable P S, Garg K K and Nune R Impact of Watershed Interventions on Streamflow of Upper Cauvery Sub-Basin. Bengaluru, India . Sustainable Water Resources Special Event at Water Future International Conference, 2019.
63. Heede B H Design, construction, and cost of rock check dams. *Rocky Mountain . Forest Service, US Department of Agriculture., 1966*. 20.
64. Djuma H [et al.] The impact of a check dam on groundwater recharge and sedimentation in an ephemeral stream. *Water*. 2017. 10 . Vol. 9. p. 813.
65. Pathak, P., Mishra, P.K., Wani, S.P. and Sudi, R. Soil and water conservation for optimizing productivity and improving livelihoods in rainfed areas. *Integrated Watershed Management in Rainfed Areas*. 2011. 5 . Vol. 19. p. 205.
66. Hudson N Soil and water conservation in semi-arid areas. Rome . Food & Agriculture Organisation, 1987. 57.
67. Alexandrov, Y., Laronne, J.B. and Reid I Intra-event and inter-seasonal behaviour of suspended sediment in flash floods of the semi-arid northern Negev, Israel. *Geomorphology*. 2007. 2 . Vol. 85. pp. 85-97.
68. Allen D M [et al.] Variability in simulated recharge using different GCMs. *Water Resour. Res*. 2010. 10 . Vol. 46.
69. Critchley, W. and Graham, O Pour protéger nos terres. *conservation des eaux et du sol en Afrique sub-Saharienne*. Oxford . Oxfam, au nom du Réseau d'information des terres arides et de l'Institut international pour l'environnement et le développement, 1991.
70. Verma G P and Singh Y P *Rainfed Farming Development in Central India*. Scientific Publishers, 2017.
71. ATREE. *Waterbodies Dataset*. 2019. Ashoka Trust for Research in Ecology and the Environment. Bangalore, India
72. Gnanaprakkasam S and Ganapathy G P Evaluation of regional flood quantiles at ungauged sites by employing nonlinearity-based clustering approaches. *Environmental Science and Pollution Research*. 2019. 22 . Vol. 26. pp. 22856-22877.
73. Pai DS [et al.] Development of a new high spatial resolution (0.25° X 0.25°) Long period (1901-2010) daily gridded rainfall data set over India and its comparison with existing data sets over the region. *MAUSAM*. 2014. 1 . Vol. 65. pp. 1-18.

74. Arulbalaji P [et al.] Hydrological assessment of groundwater potential zones of Cauvery River Basin, India. a geospatial approach. Environ. Earth Sci. 2019. 4 . Vol. 78. p. 667. 948
949
75. Srinivasan, V., Thompson, S., Madhyastha, K., Penny, G., Jeremiah, K. and Lele, S. Why is the Arkavathy River drying? A multiple-hypothesis approach in a data-scarce region. Hydrol. Earth Syst. Sci. 2015. 4 . Vol. 19. pp. 1905-1917. 950
951
952
76. NASA JPL. NASA Shuttle Radar Topography Mission Global 1 arc Second Number. Archived by National Aeronautics and Space Administration, U.S. Government, NASA 2013. EOSDIS Land Processes DAAC; NASA JPL. Pasadena, CA, USA. 953
954
955
77. Fischer, G.; Nachtergaele, F.; Prieler, S.; van Velthuisen, H.T.; Verelst, L.; Wiberg, D. Global Agro-ecological Zones Assessment for Agriculture. IIASA 2008, 10., 26–31. 956
957
78. Roy, P.S.; Meiyappan, P.; Joshi, P.K.; Kale, M.P.; Srivastav, V.K.; Srivasatava, S.K.; Behera, M.D.; Roy, A.; Sharma, Y.; Ramachandran, R.M.; et al. Decadal Land Use and Land Cover Classifications across India, 1985, 1995, 2005. ORNL DAAC 2016. 958
959
960
79. Robinson, T.P.; Wint, G.W.; Conchedda, G.; Van Boeckel, T.P.; Ercoli, V.; Palamara, E.; Cinardi, G.; D'Aietti, L.; Hay, S.I.; Gilbert, M. Mapping the global distribution of livestock. PLoS ONE 2014, 9, e96084. 961
962