

The US COASTAL Act, the end-to-end workflow

Ali Abdolali¹, Anil Kumar², Zaizhong Ma³, Roshan Shrestha⁴, Andre Van der Westhuysen¹, Saeed Moghimi², Ryan Grout⁵, Julio Zyserman⁵, Avichal Mehra³, Maoyi Huang⁶, and Athena Clark⁷

¹NOAA Environmental Modeling Center

²NOAA

³National Centers For Environmental Prediction-Environmental Modeling Center

⁴Environmental Modeling Center, NCEP, NOAA

⁵NOAA Office of Water Prediction, National Water Center

⁶National Oceanic and Atmospheric Administration

⁷US Geological Survey

November 22, 2022

Abstract

The Named Storm Event Model (NSEM) which includes the atmospheric suite (HWRF 1, HRRR 2, RTMA-URMA 3 and WRF-LES 4) [1], the coupled wave-surge-riverine modeling system (WW3 5-ADCIRC 6-NWM 7) [2,3] and a validation suite has been developed to provide definitive estimates of wind and water variables of major landfalling hurricanes, in compliance with the United States COASTAL Act of 2012. Within this framework, the performance of atmospheric products is evaluated and blended fields are generated on a high-resolution grid, using a master blend recipe. The atmospheric data forces the downstream hydro-coupled component which includes the wave (WAVEWATCH III [4,5]), ocean circulation (ADCIRC) and hydrological models (NWM). These have been coupled using the community-based National Unified Operational Prediction Capability (NUOPC) layer based on the Earth Systems Modeling Framework (ESMF). The wind and hydro products are evaluated against offshore and coastal wave buoys, nearshore water level stations, radars and satellite altimeters, as well as USGS rapid-deployment water level and wave gauges placed in the nearshore regions and overland. The NSEM workflow will be presented at the conference, highlighting the advantages of ESMF in model performance improvement and challenges for upstream atmospheric model blending, model coupling, and validation against observations. 1- HWRF (Hurricane Weather Research and Forecasting) 2- HRRR (High-Resolution Rapid Refresh) 3- RTMA-URMA (Real Time Mesoscale Analysis-UnRestricted Mesoscale Analysis) 4- WRF-LES (Weather Research and Forecasting-Large Eddy Simulation) 5- WAVEWATCH III (WAVE-height, WATer depth and Current Hindcasting) 6- ADCIRC (The ADvanced CIRCulation model) 7- NWM (National Water Model)

✉ Email: aj.abdelhadi@uom.su.gov

The COASTAL Act, the end-to-end workflow

Al Abdelal (1,2), Arel Kumar (1,2), Zaibah Noor (1,2), Rooshan Shrestha (1,2), Andre van der Westhuizen (1,2), Saad Moghimi (3,4), Ryan Groot (5), Julio Zayasman (5), Aneel Mehra (1), Manoj Huang (6), Athena Clark (7)
 1- DICOMED/MSM, 2- I.M. Systems Group, Inc. (IMS), 3- CSUN/MSM, 4- UCR, 5- DPM/MSM, 6- GS/MSM, 7- USGS

i- Introduction

The Common Ocean for an Alternative System to Allocate Loans (COASTAL) Act was signed into law on July 2, 2022 to help FEMA determine the extent to which and in what manner to assist in "natural disaster" (or "natural events"). The COASTAL Act requires FEMA to provide detailed "post-disaster reconstruction" following system-related natural systems that impact the U.S. and its residents. The reconstruction of the system along with FEMA's local and state-level systems (SIS), that includes the strength and safety of disaster relief and state and all business, other, a great disaster relief system, FEMA is also

ii- End-to-end workflow and validation methodologies

iii- The Named Storm Event Model (NSEM)

The Named Storm Event Model (NSEM) includes the atmospheric scale (p-0.001, 0.001, 0.001, 0.001) and the system scale (0.001, 0.001, 0.001, 0.001).

iv- ATM-blending

v- References


Mohdali, A., van der Westhuizen, A., Ma, Z., Wang, A., Richard, A., and Moghimi, S. Evaluating the accuracy and consistency of atmospheric and ocean model forecasts during extreme events using model evaluation. *Storm Dynamics* (2024).

Mohdali, A., van der Westhuizen, A., Ma, Z., Wang, A., Richard, A., and Moghimi, S. Evaluating the accuracy and consistency of atmospheric and ocean model forecasts during extreme events using model evaluation. *Storm Dynamics* (2024).

Mohdali, A., van der Westhuizen, A., Ma, Z., Wang, A., Richard, A., and Moghimi, S. Evaluating the accuracy and consistency of atmospheric and ocean model forecasts during extreme events using model evaluation. *Storm Dynamics* (2024).

Mohdali, A., van der Westhuizen, A., Ma, Z., Wang, A., Richard, A., and Moghimi, S. Evaluating the accuracy and consistency of atmospheric and ocean model forecasts during extreme events using model evaluation. *Storm Dynamics* (2024).

1- EMC/NCEP/NWS/NOAA; 2- I.M. Systems Group, Inc. (IMSG); 3- CSDL/NOS/NOAA; 4- UCAR; 5- OWP/NWS/NOAA; 6-OSTI/NWS/NOAA; 7- USGS



<https://agu2021fallmeeting-agu.ipostersessions.com/Default.aspx?s=10-AA-1E-D3-10-C2-2D-83-1D-02-C0-1C-2C-AD-B4-F1&pdfprint=true&guestview=true>



I- INTRODUCTION

The Consumer Option for an Alternative System to Allocate Losses (COASTAL) Act was signed into law on July 6, 2012 to help FEMA determine the extent to which wind vs. water damage in cases of “indeterminate losses” (or “slab cases”). The COASTAL Act requires NOAA to produce detailed “post-storm assessments” following certain named tropical systems that impact the U.S. and its territories. The assessments will be produced using a new NOAA hindcast modeling system (NSEM) that indicates the strength and timing of damaging winds and water at all locations within a given location in the impacted area. NOAA is also required to make post-storm assessment results and observations from the storm available to the public via a new online database. To meet these requirements, the COASTAL Act team has been developing the Named Storm Event Model (NSEM), as a well-defined coupled modeling system with model components for storm surge and waves, winds, gusts and surface pressure analyses, and precipitation and hydrology, as well as the Coastal Wind and Water Event Database (CWWED) for hosting the output.

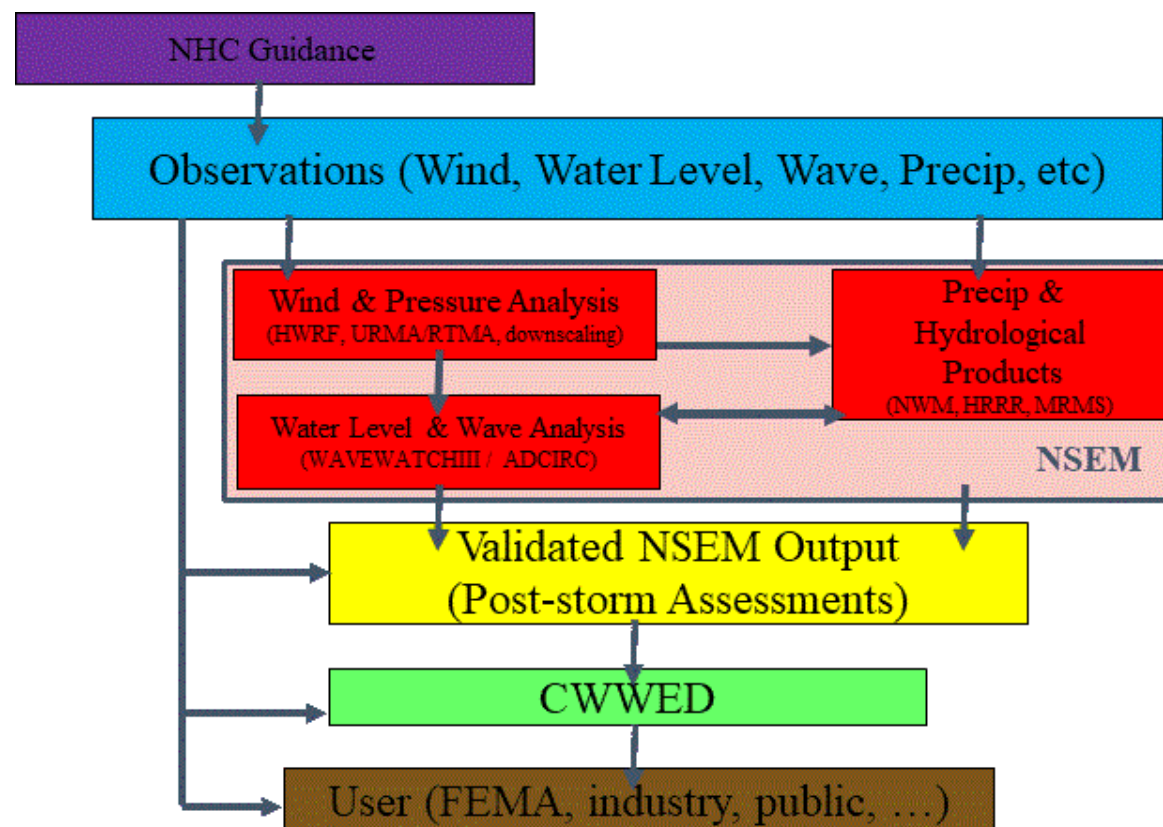


Figure 1- COASTAL Act process (For Official Use Only - Pre-decisional information).

II- THE NAMED STORM EVENT MODEL (NSEM)

The Named Storm Event Model (NSEM) includes the atmospheric suite (HWRF, HRRR, RTMA-URMA and WRF-LES) and hydro suite (WW3-ADCIRC-NWM).

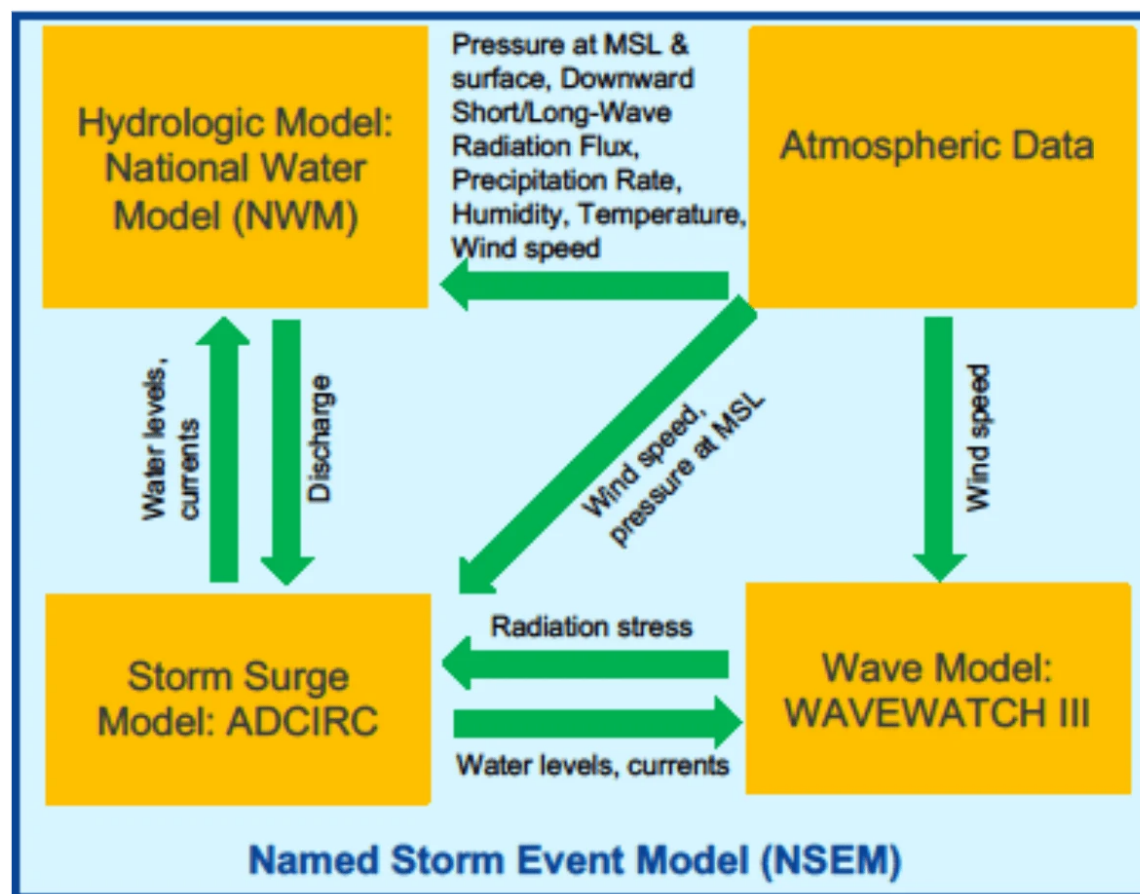


Figure 2- The Named Storm Event Model (NSEM) framework (For Official Use Only - Pre-decisional information).

ATMOSPHERIC Suite

HWRF Reanalysis and Reforecasting

For near-shore oceanic environments, in the presence of tropical storms and hurricanes, the operational Hurricane Weather Research and Forecast (HWRF (<http://doi.org/10.3390/atmos11090888>)) system can be used in retrospective (historical) mode to generate the URMA background field. The HWRF executes operationally at 2 km resolution near the tropical cyclone's center where the strongest winds are usually found. The URMA and HWRF systems can provide a consistent starting point for the NSEM wind analyses since they are of comparable resolution.

Wind and Surface Pressure Analyses (RTMA-URMA)

The NOAA Hurricane Weather Research and Forecast (HWRF) system and the NOAA High-Resolution Rapid Refresh (HRRR)-Rapid Refresh (RAP) provide the background and the UnRestricted Mesoscale Analysis (URMA), part of the NOAA Real-Time Mesoscale Analysis (RTMA) system. RTMA-URMA performs the mean wind, gust, surface pressure and AS analyses. The URMA will include additional available observations gathered and processed into the analysis. The URMA serves as an intermediate solution for constraining & improving the parcel-scale downscaled wind analysis by providing a reanalysis of the available surface observations.

Wind Analysis Downscaling (WRF-LES):

wind analysis and to estimate the strength and timing of damaging winds at a given, "parcel-scale" over-land location in the area impacted by the tropical cyclone and to drive surge and wave models for estimating the water damage. Since parcels are approximately 100 m in extent, and feasible wind analyses are in the 1,000-2,500 m range, some further estimate of wind at the parcel scale must be derived using a "downscaling" technique.

A very fine 30-meter- resolution land-use data along with 10-meter resolution terrain data are implemented which allows us to capture fine details (at parcel-scale) for coastal geography and water inundation characteristics. The Wind downscaling is designed to produce 5-minutes interval surface wind speed, wind gusts, wind direction time series at any given coastal location where maximum damages occur over residential or commercial structures.

Precipitation:

The Multiple-Radar Multiple-Sensor (MRMS) precipitation analysis, which combines data from radar, satellites, surface observations, upper air observations, rain gauges, and models, provides an approximation of the amount of precipitation accumulated on areas in near-real time. The High-Resolution Rapid Refresh (HRRR) model is a real-time, 3km resolution convective-allowing model (CAM), updated hourly, with 3km radar data assimilated every 15 minutes over a 1 hour period.

Hydro-suite

A significant portion of flooding due to storm-induced hurricanes is caused by the interactions of wind-generated waves and the underlying surge – with radiation stresses from wave processes playing a significant role in the surge, and the combined wave-current bottom boundary dynamics being important for both the wave and surge processes. Highly-sophisticated numerical models that separately simulate surge and wave processes have been developed and validated at NOAA over the last decade (the ADCIRC-based ESTOFS system for the surge modeling and WAVEWATCH III Global Multi-1 system for wave modeling). Apart from having state-of-the-art physics, these models can be run in unstructured grid formulation, a key requirement for seamlessly simulating inundation processes at small spatial scales along the coast. The hydrodynamic part of the NSEM is coupled three-way between wave, ocean, and hydrology model components, using the flexible Earth System Modeling Framework (ESMF)/National Unified Operational Prediction Capability (NUOPC) coupling framework, consistent with NOAA's Unified Forecast System (UFS). In the COASTAL Act and within the NEMS framework, the two modeling systems (storm surge and wave) are dynamically coupled to exchange physical processes so as to obtain accurate estimates of total wave–surge induced inundation (coupling to hydrological model is under development).

The hydro part is forced by a blended atmospheric field, made up of the atmospheric model output from regional scale to the downscaled results over the impacted area. Within this framework, the performance of atmospheric products is evaluated and blended fields are generated on a high-resolution grid, using a master blend recipe (see section iv).

WAVEWATCH III:

WAVEWATCH III (<https://github.com/noaa-emc/ww3>) is a community wave modeling framework that includes the latest scientific advancements in the field of wind-wave modeling and dynamics. The core of the framework consists of the WAVEWATCH III third-generation wave model (WAVE-height, WATer depth, and Current Hindcasting), developed at NOAA/NCEP.

WAVEWATCH III solves the random phase spectral action density balance equation for wavenumber-direction spectra. The implicit assumption of this equation is that properties of medium (water depth and current), as well as the wave field itself, vary on time and space scales that are much larger than the variation scales of a single wave. The model includes options for shallow-water (surf zone) applications, as well as wetting and drying of grid points. The wave model is a

sophisticated modeling system with numerous developments that have been added in recent years (wave – hurricane interaction physics, new wave growth and dissipation physics packages, wave – mud, wave – vegetation, and wave – bottom interaction physics to name a few) (Abdolali et. al 2019 (<https://doi.org/10.1016/j.coastaleng.2020.103656>)).

ADCIRC:

The ADvanced CIRCulation model (ADCIRC (<http://doi.org/10.3390/jmse8050308>)) is a finite element hydrodynamic community model. Its natural finite element unstructured mesh capability, and several modules specifically address various aspects of the coastal flooding and tropical cyclone forcing, making it one of the best tools available for coastal inundation studies. ADCIRC operates in either two-dimensional depth-integrated depth-averaged (2D barotropic) and three-dimensional (baroclinic) modes. In the 2D mode, it solves equations for both water surface elevation and the depth-averaged velocity fields.

National Water Model:

NOAA's National Water Model (NWM (<http://doi.org/10.1029/2019JC015822>)) is the foundation for the nationally consistent operational hydro forecasting and source of inland hydrologic information. NWM provides river channel discharge within the CONUS areas including coastal zones. The model is coupled to the Extratropical Surge and Tide Operational Forecast System (ESTOFS) and Advanced Circulation Model (ADCIRC) in the Coastal Zones.

Other components:

Surge Wave Grid Development:

New grids have been generated with refinement in the nearshore and overland areas to improve the NSEM's ability to meet the COASTAL Act's requirements, as determined by model testing. The grid are adjusted to (1) better represent features in regions vulnerable to inundation and (2) incorporate and better reflect new bathymetry and topography made available through COASTAL Act Bathymetry/Topography dataset.

Bathy-Topo DEM

Within the COASTAL Act, NCEI with support from NOAA's Office for Coastal Management (OCM), identified and evaluated existing coastal elevation datasets, including source data (i.e. lidar surveys) and derivative products (i.e. DEMs). The gap analysis included assessing the data quality, spatial extent and date of acquisition and/or creation (in the case of DEMs). The products are developed and tested under the Disaster Relief Appropriation for Hurricane Sandy to build the suite of seamless topographic-bathymetric and bathymetric high-resolution telescoping DEMs for the identified areas of interest. DEMs developed along the coast have a spatial resolution of 1/9 arc-second (~3m) and coarsen to 1/3 arc-second (~10m) offshore.

CWWED Database:

The CWWED serves as an interactive database that provides access to all “Covered Data”, both by the Named Storm Event Model (NSEM) as well as relevant stakeholders, and serves as an accessible repository for the NSEM output so it can be referenced by FEMA and all relevant stakeholders.

III- END-TO-END WORKFLOW AND VALIDATION METHODOLOGIES

[VIDEO] https://res.cloudinary.com/amuze-interactive/video/upload/vc_auto/v1638807196/agu-fm2021/10-AA-1E-D3-10-C2-2D-83-1D-02-C0-1C-2C-AD-B4-F1/Video/workflow_cropped_vcupv2.mp4

Video 1- COASTAL Act end-to-end workflow (For Official Use Only - Pre-decisional information).

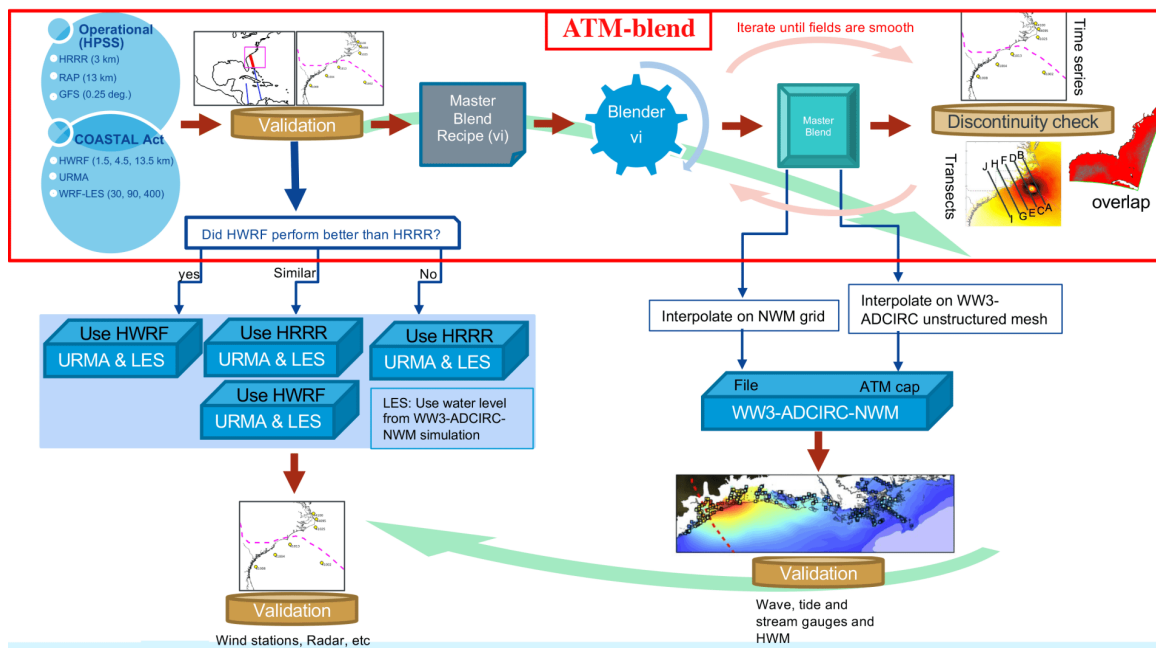


Figure 3- COASTAL Act end-to-end workflow (For Official Use Only - Pre-decisional information).

Observations

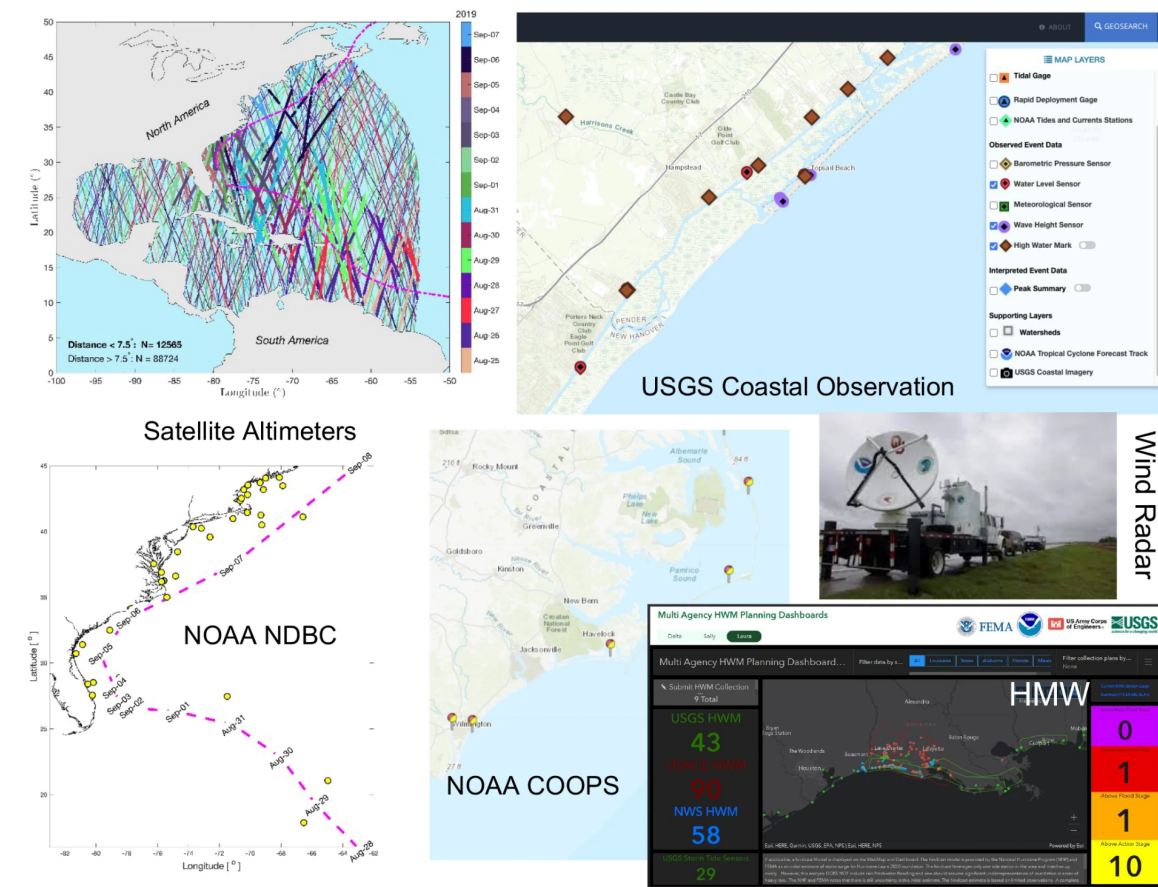


Figure 4 - Observations for COASTAL Act validation suite (For Official Use Only - Pre-decisional information).

Wind, pressure, and gust validation:

- Wind Radars
- Land-Based Meteorological Stations
- NDBC meteorological data (offshore obs)
- Satellite Altimeters (offshore obs)
- ...

Wave validation:

- NDBC buoy
- Satellite Altimeters
- USGS wave gages
- ...

Water Level Validation:

- CO-OPS tide gauges
- High Water Marks
- USGS water level gages
- ...

River Discharges:

- NOAA Streamgages
- USGS Streamgages
- ...

Validation

The wind and hydro products are evaluated against offshore and coastal wave-buoys, nearshore water level stations, radars, and satellite altimeters, as well as USGS rapid-deployment water level and wave gauges placed in the nearshore regions and overland.

TIER 1:

The overall performance of each individual model over the entire model domain and for the whole simulated time is evaluated. This validation is critical for tier 2 validation.

TIER 2:

The outputs of the atmospheric models and coupled WAVEWATCH III-ADCIRC-NWM modeling system are validated for 10 m wind, gust, and total water level as a combination of storm surge, tides, and wave activity. During the development of the NSEM model, the analysis is done for previous hurricane events for which (1) damage from the storm's inundation led to incidents of buildings being destroyed to their foundation (i.e. "slab" scenarios), and (2) more data on total water level recordings are available to validate the model performance. The skill assessment techniques and criteria are determined via two methods: paired t-test for time series comparison with available observations and 2) ensemble modeling for areas with no observations. These methodologies are consistent with the goal of the COASTAL Act to have the determination of model performance for the 90% accuracy evaluation.

Accuracy assessment with paired t-test:

For a given model run, the modeled time series are compared to the observation. The aim is to test whether a given level of accuracy (i.e. 90%) is reached (equivalently an error level of 10%). Considering the natural variability in the observed phenomenon (e.g., wind U10 wave height H_s) and observational error, it is unreasonably strict to require that every model data point has an error of less than 10%. Therefore, the accuracy assessment will focus on the mean relative difference between the modeled and observed time series, and test whether this mean difference is below 10%. The paired t-test accounts for observational uncertainty as well as the expected differences due to model errors. Since the model and observation both describe the same process (e.g., wind speed or wave height), there is a dependence between the modeled and observed time series variables. In this setting, the paired t-test hypothesis is applied to test whether the mean difference between the two time series is less than 10% or not. The following null hypothesis H_0 and alternative hypothesis H_a :

$$H_0: \mu d < 0.1$$

$$H_a: \mu d > 0.1$$

where the mean relative difference is defined as $d_i = (X_{i,model} - X_{i,obs})/X_{i,obs}$, and X_i is the model variable at time i being tested. Since the alternative hypothesis states that the relative difference is greater than 0.1, this constitutes an upper-tailed test. This test has the following assumptions:


- That the sampling distribution of d_i is a normal distribution.
- That the d_i samples are independent.


The hypothesis test is conducted at the standard level of significance of $\alpha = 0.05$. This means that the null hypothesis that the mean difference between two time series at a given station is less than 0.1 (or 10%) should be rejected if the p-value of this statistical test is < 0.05 . In practical terms, this means that the probability of erroneously rejecting the null hypothesis (that 90% accuracy is met), given that it is true, is less than 5%. See Abdolali et. al (2021) for more info.

Uncertainty Evaluation via ensemble modeling:

Conventionally, the time series of observations at fixed in situ locations such as meteorological stations, wave buoys, tide and stream gauges, and Spatio-temporal along-track satellite data are used to assess the accuracy of atmospheric, wave, and surge models. However, these data are sparse, often not covering the area of interest where the damage needs to be determined and sometimes unavailable within the landfall time window. To fill this gap, the models run on a given number of ensemble members and the spread of results as an estimate of model uncertainty is calculated. These data can be used as a measure of the model's accuracy over the entire model domain, notably in regions away from the available observations. See Abdolali et. al (2021) for more info.

IV- ATM-BLENDING

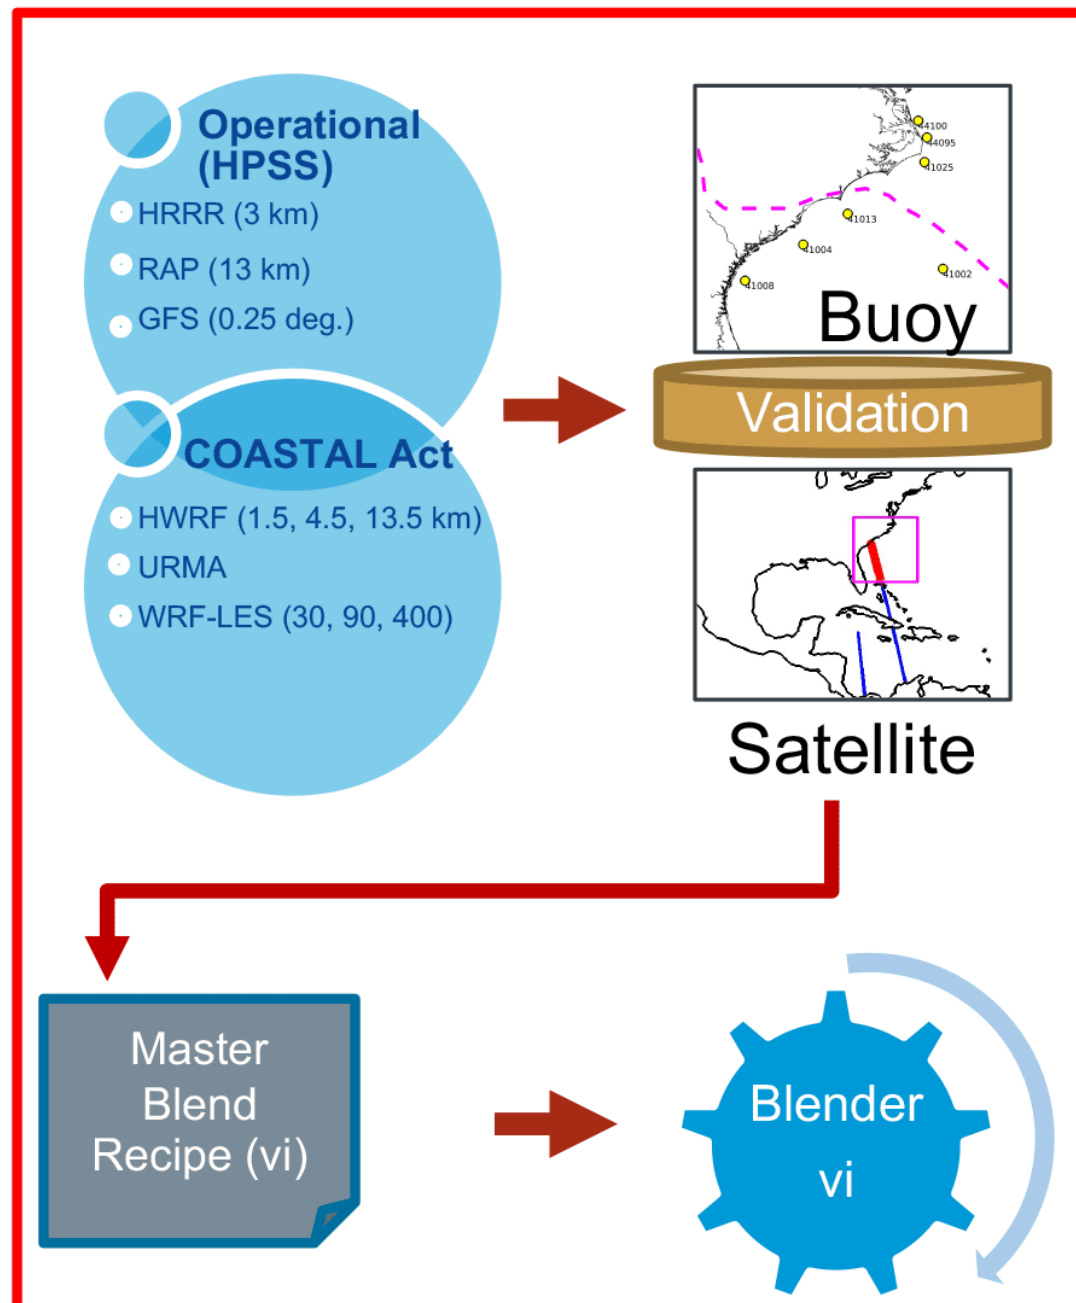

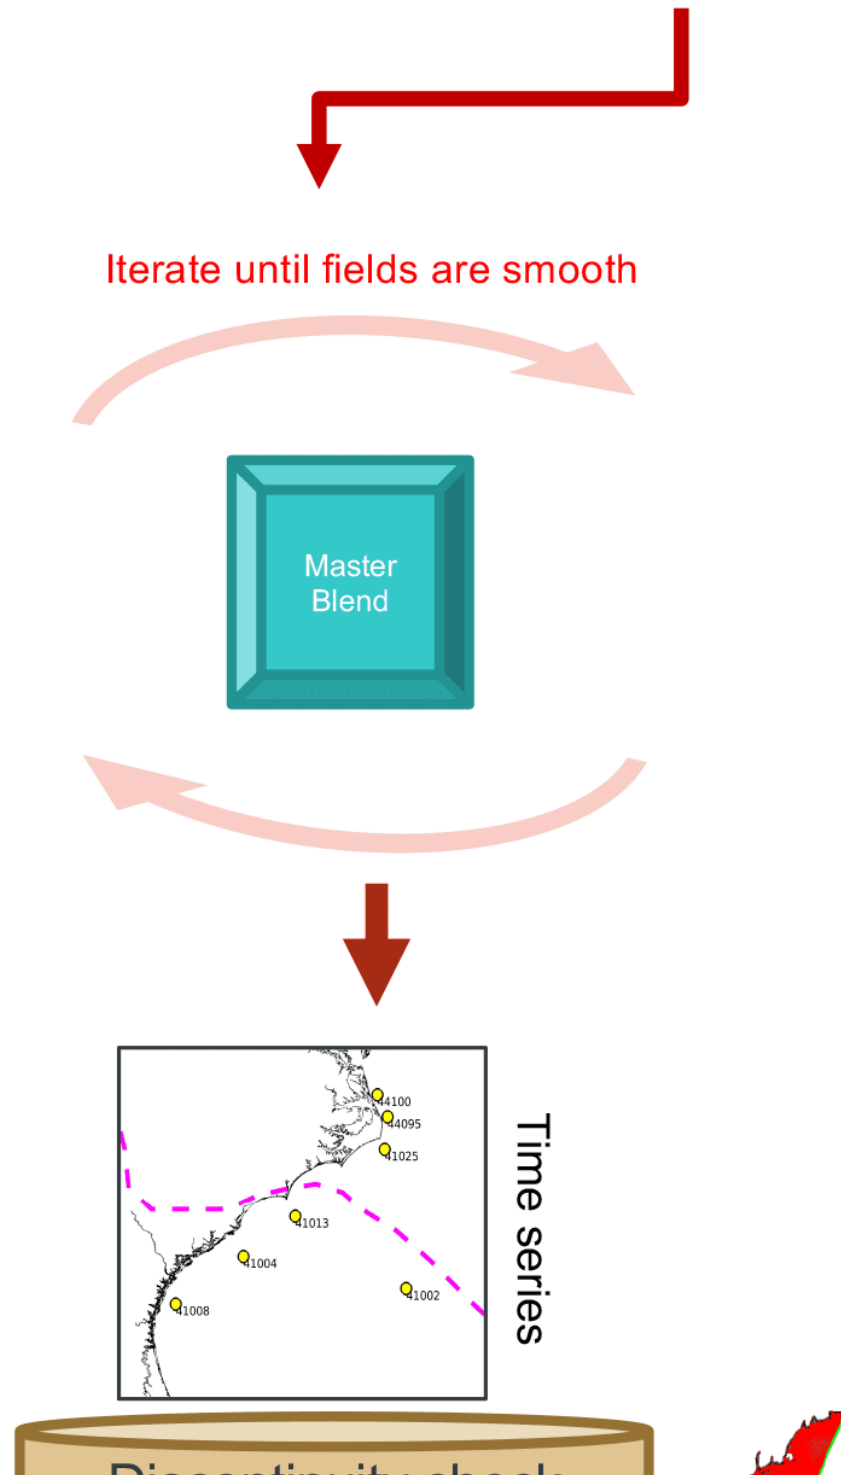

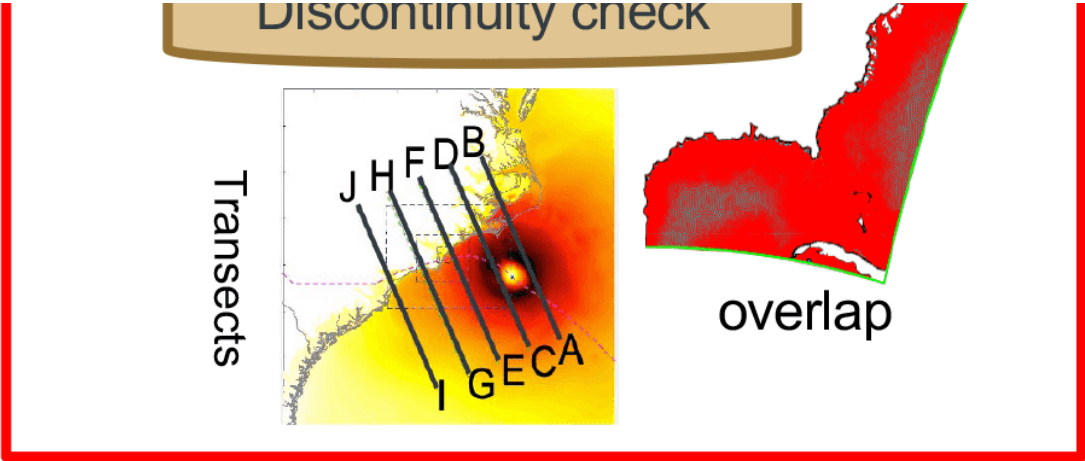


Figure 5- atm-blending workflow (For Official Use Only - Pre-decisional information).

The Hurricane Weather Research and Forecasting (HWRF) model serves as the main atmospheric engine to provide high resolution forcing along the hurricane track and at reduced resolution away from the storm. The HWRF data is available from the genesis of the hurricane to a few cycles after the landfall till the end of the storm life cycle and it covers the entire hydrodynamic domain on moving inner nested grids (core, storm, synoptic). The other COASTAL Act atmospheric model (Weather Research and Forecasting-Large Eddy Simulation WRF-LES) has a much smaller spatiotemporal coverage (~ 1 day near the landfall time and in the impacted area). The COASTAL Act utilizes other NOAA operational atmospheric models listed in Table 1.

Table 1- Temporal and spatial coverage of the existing atmospheric models in use in the atm-blend.

| ATM Model | Spatial Resolution | Spatial Coverage | Temporal Coverage |
|---------------------|--------------------------|------------------|----------------------------|
| WRF-LES | 30/90/400 m | Impacted Area | ~1 day (landfall) |
| HWRF | Moving (1.5/4.5/13.5 km) | Hurricane Track | Hurricane Genesis-Landfall |
| HRRR | 3 km | CONUS | 24/7 |
| Rapid Refresh (RAP) | 13.5 km | | 24/7 |
| GFS | 0.25 degrees | Global | 24/7 |

Based on the requirements identified by downstream models in COASTAL Act, 8 variables, listed in Table 2, are required.

Table 2- Forcing variables

| Variable Name (Standard) | Variable Name (Master Blend) | Long Name | Unit | Receiving Model |
|--------------------------|------------------------------|---|----------------------|-----------------|
| UGRD_10maboveground | U2D | U-Component of Wind 10 m above ground | m/s | WW3/ADCIRC/NWM |
| VGRD_10maboveground | V2D | V-Component of Wind 10 m above ground | m/s | WW3/ADCIRC/NWM |
| PRES_surface | PSFC | Surface Pressure | Pa | NWM |
| PRMSL_meansealevel | P | Pressure Reduced to MSL | Pa | WW3/ADCIRC |
| TMP_2maboveground | T2D | Temperature 2 m above ground | K | NWM |
| SPFH_2maboveground | Q2D | Specific Humidity 2 m above ground | kg/kg | NWM |
| PRATE_surface | RAINRATE | Precipitation Rate at surface | kg/m ² /s | NWM |
| DSWRF_surface | DSWRF | Downward Short-Wave Radiation Flux at surface | W/m ² | NWM |
| DLWRF_surface | DLWRF | Downward Long-Wave Radiation Flux at surface | W/m ² | NWM |

An atm-blending tool for blending the required fields is developed at NOAA for atmospheric models listed in Table 1. The blended product (Master Blend) is on a 0.015 degree resolution regular grid covering the entire WW3-ADCIRC-NWS domains in NetCDF (shown in Figure 6).

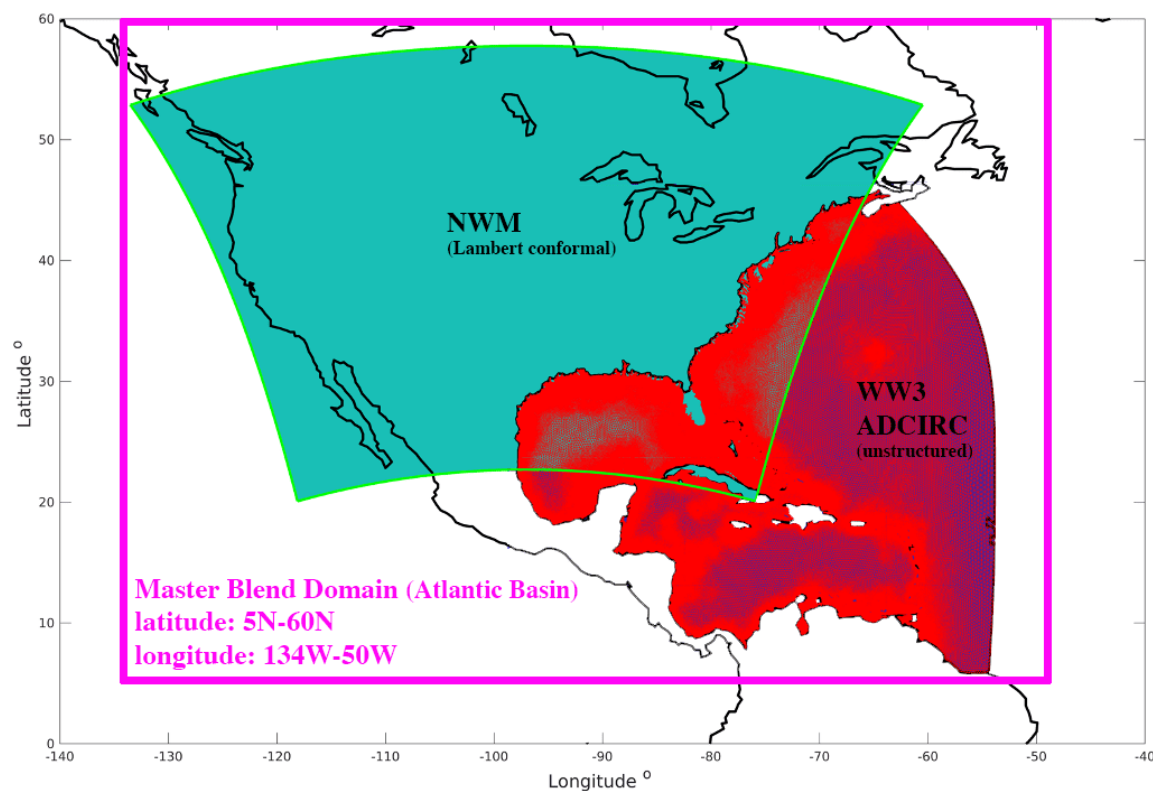


Figure 6- WW3-ADCIRC, NWM, and master blend domains (For Official Use Only - Pre-decisional information).

The tool retrieves, interpolates and blends specific operational atmospheric forcings (GFS, HWRF, RAP, HRRR) for specified variables for a domain of interest (Figure 5). A numerical recipe based on evaluating the blended fields against in situ (stations) and remote met observations (satellite altimeters) is then optimized for finalizing blended fields (Figure 6, 7). These fields can then be interpolated from structured grids to triangular unstructured meshes for downstream models.

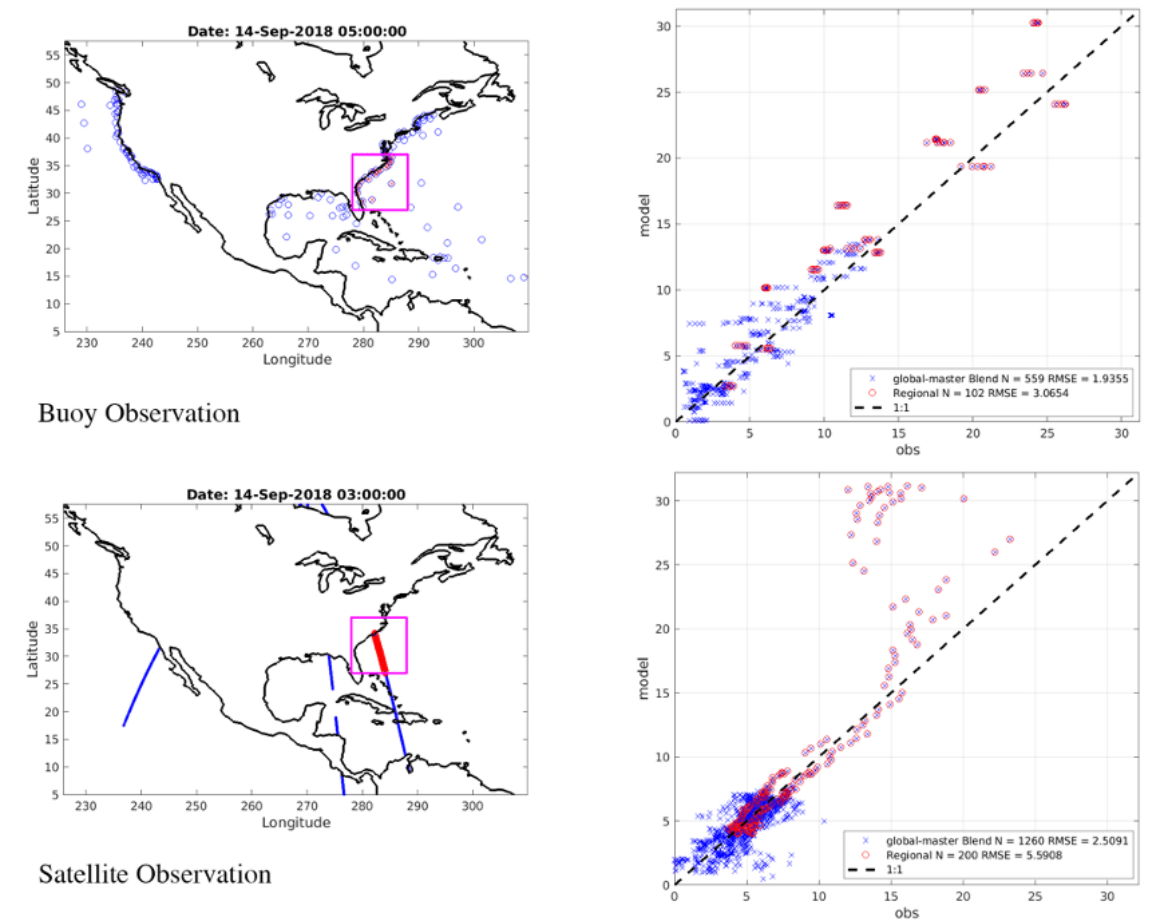


Figure 7- Satellite and buoy data comparison with atm-model components within the master blend and impacted area (For Official Use Only - Pre-decisional information).

| | | | | | | | | | |
|---|--|--------|----------|--------|----------|--------|----------|--------|----------|
| lon_min 278.000 lon_max 288.000 lan_min 27.000 lat_max 37.000 | | | | | | | | | |
| Date | | hrrf | | hrrr | | gfs | | rap | |
| | | Global | Regional | Global | Regional | Global | Regional | Global | Regional |
| YYYY MM DD HH | | no | error | no | error | no | error | no | error |
| 2018 09 01 12 | | 0873 | 1.143 | 0042 | 0.870 | 0670 | 1.490 | 0102 | 1.351 |
| 2018 09 01 13 | | 0240 | 1.168 | 0042 | 0.942 | 0678 | 1.316 | 0102 | 0.909 |
| 2018 09 01 14 | | 1694 | 1.399 | 0042 | 0.906 | 0681 | 1.607 | 0101 | 1.034 |
| 2018 09 01 15 | | 0536 | 1.205 | 0042 | 0.670 | 1032 | 1.206 | 0102 | 1.062 |
| 2018 09 01 16 | | 0240 | 0.999 | 0042 | 0.732 | 0771 | 1.715 | 0194 | 0.728 |
| 2018 09 01 17 | | 0239 | 1.088 | 0041 | 0.892 | 0505 | 1.598 | 0101 | 0.860 |
| 2018 09 01 18 | | 0240 | 1.225 | 0042 | 0.817 | 0674 | 1.804 | 0102 | 0.862 |
| 2018 09 01 19 | | 0240 | 1.111 | 0042 | 0.513 | 0843 | 1.222 | 0102 | 0.882 |
| 2018 09 01 20 | | 0240 | 1.049 | 0042 | 0.565 | 0492 | 1.263 | 0102 | 0.930 |

| | | | | | | | | |
|---------------|------------|------------|------------|------------|------------|------------|------------|------------|
| 2018 09 01 21 | 0240 1.175 | 0042 0.748 | 0485 1.159 | 0102 0.742 | 0563 1.603 | 0102 0.875 | 0563 1.335 | 0102 1.051 |
| 2018 09 01 22 | 0961 1.031 | 0060 1.131 | 0490 1.111 | 0102 0.746 | 1271 1.329 | 0102 0.827 | 1271 1.043 | 0102 0.953 |
| 2018 09 01 23 | 0258 1.170 | 0060 1.093 | 0487 1.171 | 0102 0.669 | 0565 1.608 | 0102 0.879 | 0565 1.239 | 0102 0.751 |
| 2018 09 02 00 | 0446 1.168 | 0060 1.072 | 0492 1.287 | 0102 0.709 | 0758 1.495 | 0102 0.667 | 0663 1.361 | 0102 0.760 |
| 2018 09 02 01 | 1827 1.444 | 0060 0.986 | 0487 1.242 | 0102 0.893 | 2134 1.535 | 0102 0.789 | 2069 1.507 | 0102 0.873 |
| 2018 09 02 02 | 1279 1.666 | 0127 1.153 | 0199 1.21 | 0169 1.43 | 1875 1.637 | 0169 0.971 | 875 1.459 | 0169 1.140 |
| 2018 09 02 03 | 51 1.174 | 0151 1.24 | 0158 1.33 | 0323 1.101 | 1674 1.34 | 0173 1.54 | 615 1.0 | 0323 1.109 |
| 2018 09 02 04 | 0101 1.17 | 0172 1.16 | 0171 1.19 | 0181 0.91 | 1613 1.433 | 0182 1.173 | 863 1.15 | 0102 0.970 |
| 2018 09 02 05 | 0270 1.361 | 0072 1.636 | 0486 1.417 | 0102 0.993 | 1234 1.054 | 0102 1.280 | 1234 1.014 | 0102 1.065 |
| 2018 09 02 06 | 0270 1.347 | 0072 1.226 | 0405 1.428 | 0102 1.110 | 2611 1.062 | 0102 0.975 | 2611 1.792 | 0102 1.068 |
| 2018 09 02 07 | 0270 1.344 | 0072 1.170 | 0444 1.316 | 0102 1.117 | 0035 1.317 | 0102 0.978 | 0035 1.001 | 0102 1.074 |

Atmospheric Models' performance Summary

YYYY MM DD HH ATM1 ATM2 ATM3 ATM4

2018 09 01 12 hwrf hrrr rap gfs

2018 09 01 13 hrrr gfs rap hwrf

2018 09 01 14 hrrr gfs hwrf rap

2018 09 01 15 hwrf gfs hrrr rap

2018 09 01 16 rap hwrf hrrr gfs

2018 09 01 17 rap hwrf hrrr gfs

2018 09 01 18 gfs hwrf rap hrrr

2018 09 01 19 hwrf gfs rap hrrr

2018 09 01 20 hwrf gfs rap hrrr

2018 09 01 21 hrrr hwrf gfs rap

2018 09 01 22 hrrr gfs rap hwrf

2018 09 01 23 hrrr rap gfs hwrf

2018 09 02 00 gfs hrrr rap hwrf

Sample Recipe for Hurricane Florence (2018)

Figure 8 - Model Performance Summary and Master Blend Recipe (For Official Use Only - Pre-decisional information).

The execution of the atm-blend is semi-automated in the following hierarchical order:

1. ATM Data Retrieval from HPSS archive (HWRF, HRRR, GFS, RAP).

2. Variables extraction (entire Table 2) from the GRIB2 files, interpolate on the master blend domain and write in NetCDF format.
3. Observation Data Retrieval for stationary meteorological stations and along satellite altimeters tracks.
4. Statistical Analysis of each model performance over the entire master blend domain and in the impacted area (Figure 2).
5. Recipe preparation based on the model performances (Figure 3).
6. Master Blend Preparation based on the recipe.
7. Interpolation from the structured lat-lon grid to triangular unstructured mesh for WW3-ADCIRC and to Lambert conformal regular grid for NWM.

V- REFERENCES

Abdolali, A., van der Westhuysen, A., Ma, Z., Mehra, A., Roland, A. and Moghimi, S. Evaluating the accuracy and uncertainty of atmospheric and wave model hindcasts during severe events using model ensembles. *Ocean Dynamics* (2021) link (<https://doi.org/10.1007/s10236-020-01426-9>).

Abdolali, A., Aron Roland, Andre van der Westhuysen, Jessica Meixner, Arun Chawla, Tyler J. Hesser, Jane M. Smith, Mathieu Dutour Sikiric, Large-scale hurricane modeling using domain decomposition parallelization and implicit scheme implemented in WAVEWATCH III wave model, 2020. *Coastal Engineering*, 157, 103656 link (<https://doi.org/10.1016/j.coastaleng.2020.103656>).

Bakhtyar, R., Maitaria, K., Velissariou, P., Trimble, B., Mashriqui, H., Moghimi, S., Abdolali, A., Van der Westhuysen, A.J., Ma, Z., Clark, E.P. and Flowers, T. (2020). A new 1D/2D Coupled Modeling Approach for a Riverine–Estuarine System under Storm Events: Application to Delaware River Basin. *Journal of Geophysical Research: Oceans*, 125, e2019JC015822 link (<https://doi.org/10.1029/2019JC015822>).

Ma, Z.; Liu, B.; Mehra, A.; Abdolali, A.; van der Westhuysen, A.; Moghimi, S.; Vinogradov, S.; Zhang, Z.; Zhu, L.; Wu, K.; Shrestha, R.; Kumar, A.; Tallapragada, V.; Kurkowski, N. Investigating the Impact of High-Resolution Land–Sea Masks on Hurricane Forecasts in HWRP. *Atmosphere* 2020, 11, 888. link (<https://doi.org/10.3390/atmos11090888>)

Moghimi, S.; A. Van der Westhuysen, A. Abdolali, E. Myers, S. Vinogradov, Z. Ma, F. Liu, Mehra, A.; Kurkowski, N. Development of an ESMF Based Flexible Coupling Application of ADCIRC and WAVEWATCH III for High Fidelity Coastal Inundation Studies. 2020. *J. Mar. Sci. Eng.* 8, 308 link (<https://doi.org/10.3390/jmse8050308>).

Moghimi, S., S. Vinogradov, E. Myers, Y. Funakoshi, A.J. Van der Westhuysen, A. Abdolali, Z. Ma, F. Liu. Development of a Flexible Coupling Interface for ADCIRC Model for Coastal Inundation Studies. NOAA technical memorandum, NOS CS 41, 2019 link (<http://https://doi.org/10.25923/akzc-kc14>).

The WAVEWATCH III® Development Group (WW3DG), 2019: User manual and system documentation of WAVEWATCH III® version 6.07. Tech. Note 333, NOAA/NWS/NCEP/MMAB, College Park, MD, USA, 326 pp. + Appendices.

DISCLOSURES

For Official Use Only - Pre-decisional information

ABSTRACT

The Named Storm Event Model (NSEM) which includes the atmospheric suite (HWR¹[1 (<https://www.mdpi.com/2073-4433/11/9/888>)], HRRR², RTMA-URMA³ and WRF-LES⁴), the coupled wave-surge-riverine modeling system (WW³-ADCIRC⁶-NWM⁷) [2 (<https://doi.org/10.1029/2019JC015822>)],3 (<https://doi.org/10.3390/jmse8050308>)] and a validation suite has been developed to provide definitive estimates of wind and water variables of major landfalling hurricanes, in compliance with the United States COASTAL Act of 2012. Within this framework, the performance of atmospheric products is evaluated and blended fields are generated on a high-resolution grid, using a master blend recipe. The atmospheric data forces the downstream hydro-coupled component which includes the wave (WAVEWATCH III (<https://github.com/NOAA-emc/ww3>) [4 (<https://doi.org/10.1016/j.coastaleng.2020.103656>)],5 (<https://doi.org/10.1007/s10236-020-01426-9>)]), ocean circulation (ADCIRC) and hydrological models (NWM). These have been coupled using the community-based National Unified Operational Prediction Capability (NUOPC) layer based on the Earth Systems Modeling Framework (ESMF).

The wind and hydro products are evaluated against offshore and coastal wave buoys, nearshore water level stations, radars and satellite altimeters, as well as USGS rapid-deployment water level and wave gauges placed in the nearshore regions and overland. The NSEM workflow will be presented at the conference, highlighting the advantages of ESMF in model performance improvement and challenges for upstream atmospheric model blending, model coupling, and validation against observations.

1- HWR¹ (Hurricane Weather Research and Forecasting)

2- HRRR (High-Resolution Rapid Refresh)


3- RTMA-URMA (Real Time Mesoscale Analysis-UnRestricted Mesoscale Analysis)

4- WRF-LES (Weather Research and Forecasting-Large Eddy Simulation)

5- WAVEWATCH III (WAVE-height, WATer depth and Current Hindcasting)

6- ADCIRC (The ADvanced CIRCulation model)

7- NWM (National Water Model)

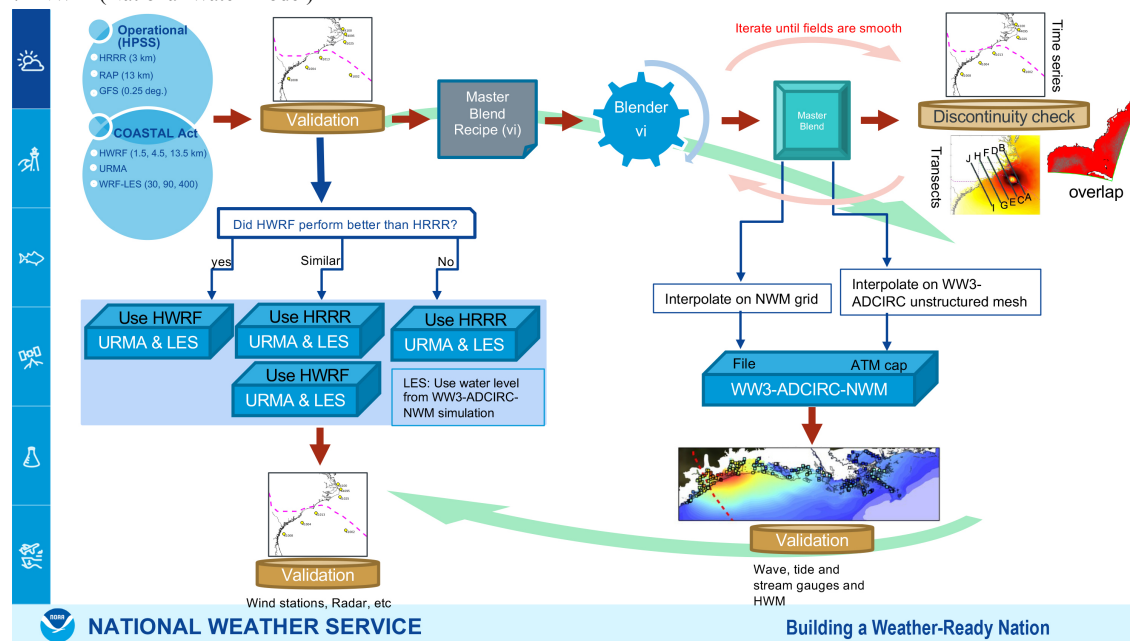

(https://agu.confex.com/data/abstract/agu/fm21/4/1/Paper_825114_abstract_831792_0.jpg)

REFERENCES

Abdolali, A., van der Westhuysen, A., Ma, Z. Mehra, A., Roland, A. and Moghimi, S. Evaluating the accuracy and uncertainty of atmospheric and wave model hindcasts during severe events using model ensembles. *Ocean Dynamics* (2021). <https://doi.org/10.1007/s10236-020-01426-9>

Abdolali, A., Aron Roland, Andre van der Westhuysen, Jessica Meixner, Arun Chawla, Tyler J. Hesser, Jane M. Smith, Mathieu Dutour Sikiric, Large-scale hurricane modeling using domain decomposition parallelization and implicit scheme implemented in WAVEWATCH III wave model, 2020. *Coastal Engineering*, 157, 103656, <https://doi.org/10.1016/j.coastaleng.2020.103656>

Bakhtyar, R., Maitaria, K., Velissariou, P., Trimble, B., Mashriqui, H., Moghimi, S., Abdolali, A., Van der Westhuysen, A.J., Ma, Z., Clark, E.P. and Flowers, T. (2020). A new 1D/2D Coupled Modeling Approach for a Riverine–Estuarine System under Storm Events: Application to Delaware River Basin. *Journal of Geophysical Research: Oceans*, 125, e2019JC015822. <https://doi.org/10.1029/2019JC015822>

Ma, Z.; Liu, B.; Mehra, A.; Abdolali, A.; van der Westhuysen, A.; Moghimi, S.; Vinogradov, S.; Zhang, Z.; Zhu, L.; Wu, K.; Shrestha, R.; Kumar, A.; Tallapragada, V.; Kurkowski, N. Investigating the Impact of High-Resolution Land–Sea Masks on Hurricane Forecasts in HWRF. *Atmosphere* 2020, 11, 888. <https://www.mdpi.com/2073-4433/11/9/888#cite>

Moghimi, S.; A. Van der Westhuysen, A. Abdolali, E. Myers, S. Vinogradov, Z. Ma, F. Liu, Mehra, A.; Kurkowski, N. Development of an ESMF Based Flexible Coupling Application of ADCIRC and WAVEWATCH III for High Fidelity Coastal Inundation Studies. 2020. *J. Mar. Sci. Eng.* 8, 308, <https://doi.org/10.3390/jmse8050308>

Moghimi, S., S. Vinogradov, E. Myers, Y. Funakoshi, A.J. Van der Westhuysen, A. Abdolali, Z. Ma, F. Liu. Development of a Flexible Coupling Interface for ADCIRC Model for Coastal Inundation Studies. NOAA technical memorandum, NOS CS 41, 2019, <https://doi.org/10.25923/akzc-kc14>

LINK TO A SURVEY

Enter your survey URL here

<https://example.com>

Submit

Delete